

DECO-20-TRIO

Date:04/2018

Variant	Item No.	Description
20432	DECO-20-W-TRIO	20W Downlight, Satin White Finish. TRIO Technology
20433	DECO-20-B-TRIO	20W Downlight, Black Finish. TRIO Technology


Thank you for purchasing your new LED DECO-20, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

Voltage:	240V AC	Lumen (±5%):	Warm White - 1700lm Neutral White - 1750lm White - 1800lm	Dimmable:	Yes (Domus dimmer series)
Power:	20W	Beam Angle:	120°	Operating Temp:	-20° - 65°C
IP Rating:	44	CCT:	3000K - 4000K - 5700K (Switchable)	Lifespan:	50,000hrs
CRI:	>83				

How to install:

- The LED down light shall be installed in accordance to Australian/NZ electrical standards.
- The LED down light shall be installed in locations and in conditions as described in the below figure.
- Please make sure all electricity is switched off at the main switch board before any electrical works are to commence.
- Cut out the hole according to the downlight cutout table.
- The LED driver is supplied with an Australian approved 2pin flex and plug.
- For easy maintenance Domus recommends the use of plug base sockets in the ceiling.
- If you are intending to hard wire the LED drivers please remove the supplied flex and plug from the LED driver.
- When connecting the LED lamp/down light to the LED driver please ensure the connecting plug is securely pushed in and the connection is not loose.

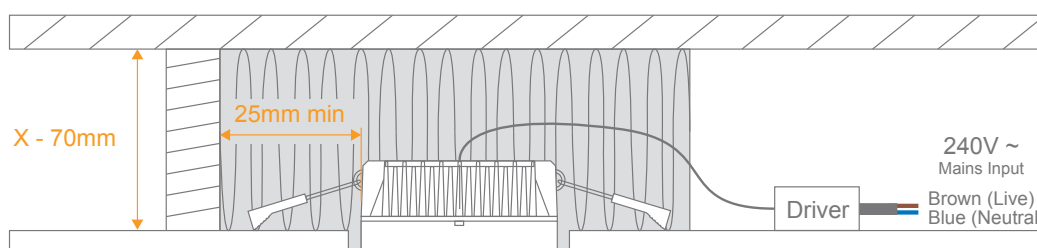

Note: The LED driver is NOT suitable for covering with insulation material.

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas