


MAXI 40 Flat Series LED Linear Pendants



Description

The Maxi-40 Down suspension pendant is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and PLEX-COB-20W LED Strip. The system offers many additional options such as DALI dimming and Emergency function upon request. Available in 1.2M, 1.7M and 2.4M. Available in Flat, Low and High Diffuser options depending on desired application, light output and appearance requirements.


- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- Black and Clear diffuser options available upon request.
- CRI90
- IP20 Indoor Use Only.

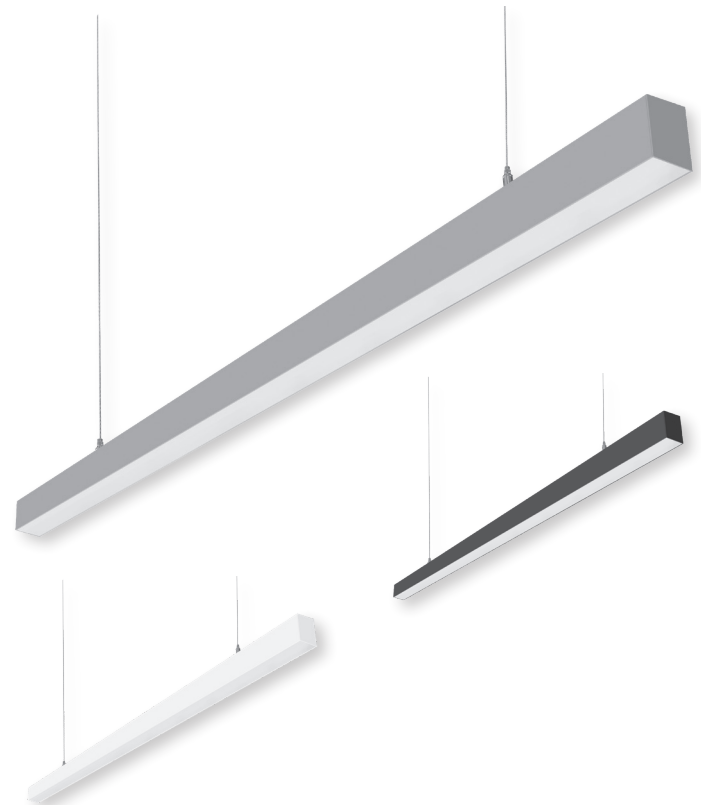

Specification Features

Input Voltage:	240V AC
IP rating (IP):	IP20
Power (W):	24W (1.2m) 34W (1.7m) 48W (2.4m)
Lumens (lm):	Warm White 3000K - 2160lm 1.2m Neutral White 4000K - 2400lm
Lumens (lm):	Warm White 3000K - 3060lm 1.7m Neutral White 4000K - 3400lm
Lumens (lm):	Warm White 3000K - 4320lm 2.4m Neutral White 4000K - 4800lm
LED type:	COB Strip
CCT:	3000K - 4000K
CRI:	≥90
Beam angle (°):	120°
Dimmable:	Yes
Lifespan (hrs):	50,000hrs

Diagrams / Additional

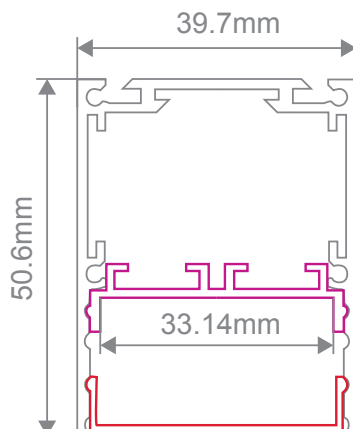

Item No.	Variant			Diffuser	CCT
	Wht	Blk	Alu		
MAXI-40-1.2M-FD	30135	30140	30130	Prismatic	3000K
	30136	30141	30131	Frosted	3000K
	30150	30156	30145	Prismatic	4000K
	30151	30157	30146	Frosted	4000K
MAXI-40-1.7M-FD	30225	30230	30220	Prismatic	3000K
	30226	30231	30221	Frosted	3000K
	30240	30245	30235	Prismatic	4000K
	30241	30246	30236	Frosted	4000K
MAXI-40-2.4M-FD	30315	30320	30310	Prismatic	3000K
	30316	30321	30311	Frosted	3000K
	30330	30335	30325	Prismatic	4000K
	30331	30336	30326	Frosted	4000K

MAXI 40 Low Series LED Linear Pendants




Description

The Maxi-40 Down suspension pendant is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and PLEX-COB-20W LED Strip. The system offers many additional options such as DALI dimming and Emergency function upon request. Available in 1.2M, 1.7M and 2.4M. Available in Flat, Low and High Diffuser options depending on desired application, light output and appearance requirements.


- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- Black and Clear diffuser options available upon request.
- CRI90
- IP20 Indoor Use Only.

Specification Features

Input Voltage:	240V AC
IP rating (IP):	IP20
Power (W):	24W (1.2m) 34W (1.7m) 48W (2.4m)
Lumens (lm):	Warm White 3000K - 2160lm 1.2m Neutral White 4000K - 2400lm
Lumens (lm):	Warm White 3000K - 3060lm 1.7m Neutral White 4000K - 3400lm
Lumens (lm):	Warm White 3000K - 4320lm 2.4m Neutral White 4000K - 4800lm
LED type:	COB Strip
CCT:	3000K - 4000K
CRI:	≥90
Beam angle (°):	120°
Dimmable:	Yes
Lifespan (hrs):	50,000hrs

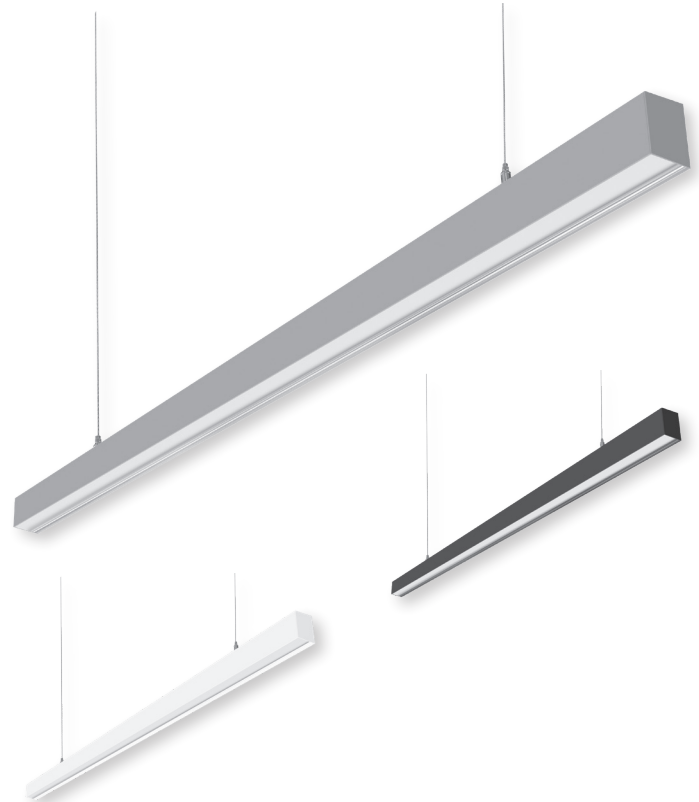

Diagrams / Additional

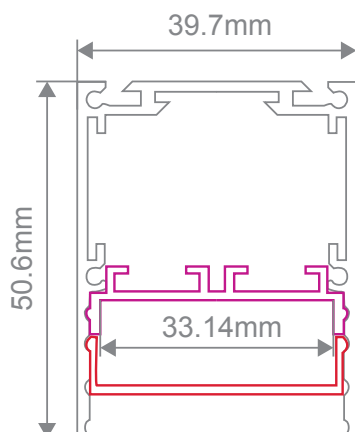

Item No.	Variant			Diffuser	CCT
	Wht	Blk	Alu		
MAXI-40-1.2M-LD	30105	30110	30100	Prismatic Frosted	3000K
	30106	30111	30101		
	30120	30125	30115	Prismatic Frosted	4000K
	30121	30126	30116		
MAXI-40-1.7M-LD	30195	30200	30190	Prismatic Frosted	3000K
	30196	30201	30191		
	30210	30215	30205	Prismatic Frosted	4000K
	30211	30216	30206		
MAXI-40-2.4M-LD	30285	30290	30280	Prismatic Frosted	3000K
	30286	30291	30281		
	30300	30305	30295	Prismatic Frosted	4000K
	30301	30306	30296		

MAXI 40 High Series LED Linear Pendants



Description

The Maxi-40 Down suspension pendant is designed to suit commercial and residential applications, this profile system incorporates an extruded aluminium body with flat PMMA diffuser, and PLEX-COB 20W LED Strip. The system offers many additional options such as DALI dimming and Emergency function upon request. Available in 1.2M, 1.7M and 2.4M. Available in Flat, Low and High Diffuser options depending on desired application, light output and appearance requirements.


- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- Black and Clear diffuser options available upon request.
- CRI90
- IP20 Indoor Use Only.

Specification Features

Input Voltage:	240V AC
IP rating (IP):	IP20
Power (W):	24W (1.2m) 34W (1.7m) 48W (2.4m)
Lumens (lm):	Warm White 3000K - 2160lm 1.2m Neutral White 4000K - 2400lm
Lumens (lm):	Warm White 3000K - 3060lm 1.7m Neutral White 4000K - 3400lm
Lumens (lm):	Warm White 3000K - 4320lm 2.4m Neutral White 4000K - 4800lm
LED type:	COB Strip
CCT:	3000K - 4000K
CRI:	≥90
Beam angle (°):	120°
Dimmable:	Yes
Lifespan (hrs):	50,000hrs



Diagrams / Additional

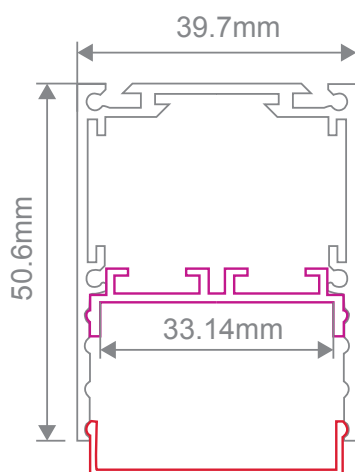

Item No.	Variant			Diffuser	CCT
	Wht	Blk	Alu		
MAXI-40-1.2M-HD	30165	30170	30160	Prismatic Frosted	3000K
	30166	30171	30161	Frosted	4000K
	30180	30185	30175	Prismatic Frosted	
MAXI-40-1.7M-HD	30181	30186	30176	Frosted	4000K
	30255	30260	30250	Prismatic Frosted	
	30256	30261	30251	Frosted	
	30270	30275	30265	Prismatic Frosted	
MAXI-40-2.4M-HD	30271	30276	30266	Frosted	4000K
	30345	30350	30340	Prismatic Frosted	
	30346	30351	30341	Frosted	
	30360	30365	30355	Prismatic Frosted	
	30361	30366	30356	Frosted	