

Neo-Pro-25-SM

















LED Surface Mounted Downlight

Description

The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tricolour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers.

Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.



Input Voltage: 240V Power (W): 25 IP rating (IP): IP65**

Lumens (lm): Warm White 3000K - 2200lm

Neutral White 4000K - 2400lm

White 5700K - 2300lm

LED type: SMD

CCT: 3000K - 4000K - 5700K (Switchable)


CRI: ≥90
Beam angle (°): 75°
Dimmable: Yes*

Lifespan (hrs): 50,000hrs

*Fully dimmable with suitable dimmers.



Diagrams / Additional

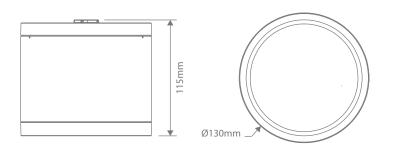

	Item No.	Variant		CCT
		Wht	Blk	CCI
		20893	20892	TRIO
	NEO-PRO-25-SM	DALI		
		2130/1	21305	TDIO

^{**}IP65 from front only.