

29-31 Richland St. Kingsgrove. Sydney NSW 2208 Australia Phone: 02 9554 9600 | Fax: 02 9554 9433

enquiries@domuslighting.com.au | www.domuslighting.com.au

## Installation Manual

## NEO-PRO-25-SM

Date: 05/2023


	Variants	I AI		
Blk	Wht	Item No.	Colour Iemp	
20892	20893	NEO-PRO-25-SM	TRIO	

Thank you for purchasing your new NEO-PRO-25 surface mounted downlight, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

## Specifications

- Providence							
Voltage:	240V	Lumen (±5%):	Warm White 3000K - 2200Lm Neutral White 4000K - 2400Lm White 5700K - 2300Lm	Dimmable:	Yes*		
Power:	25W	Beam Angle:	75°	IP Rating:	65**		
CRI:	≥90	CCT:	3000K - 4000K - 5700K	Lifespan:	50,000hrs		

<sup>\*</sup>Fully dimmable with suitable dimmers.

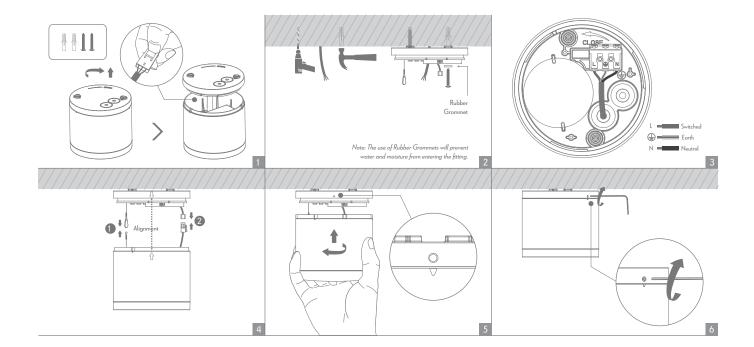

- -The lamp must be installed by professional electrician
- -Ensure the power supply is switched off before fitting this product
- -Do not touch the lamp when in use
- -Keep away from hot steam and corrosive gas

<sup>\*\*</sup>IP65 from front only.