

Neo-Pro-25 LED Recessed Downlight

















Description

The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tri-colour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers.

Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.



Specification Features

Input Voltage: 240V Power (W): 25 IP rating (IP): IP65**

Lumens (lm): Warm White 3000K - 2250lm

Neutral White 4000K - 2400lm

White 5700K - 2300lm

LED type: SMD

CCT: 3000K - 4000K - 5700K

CRI: ≥90


Beam angle (°): 90°

Dimmable: Yes*


Lifespan (hrs): 50,000

Lifespan (hrs): 50,000hrs
Cutout (Ø): Ø150-165mm
*Fully dimmable with suitable dimmers.

**ID4E((. . !



Diagrams / Additional

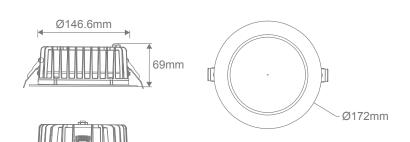

Cutout: Ø150-165mm

Item No.	Variant		CCT
	Wht	Blk	CCI
NEO-PRO-25-REC	20918	20917	TRIO
	DALI		
	21609	21610	TRIO

^{**}IP65 from front only.