DOMUS®

29-31 Richland St. Kingsgrove. Sydney NSW 2208 Australia
Phone: 02 9554 9600

enquiries@domuslighting.com.au | www.domuslighting.com.au

Installation Manual

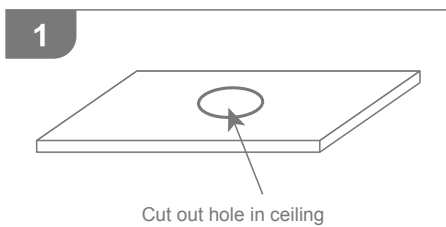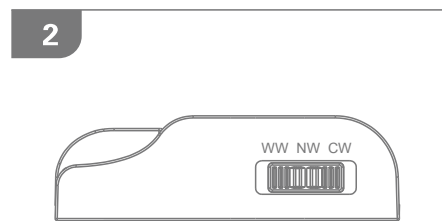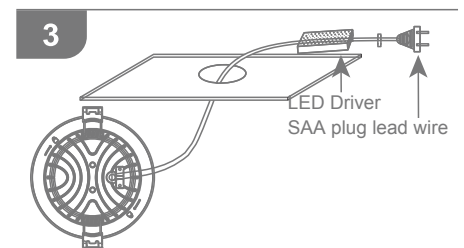Date: February 5, 2024 2:09 PM

Swap 8 Step

Specifications

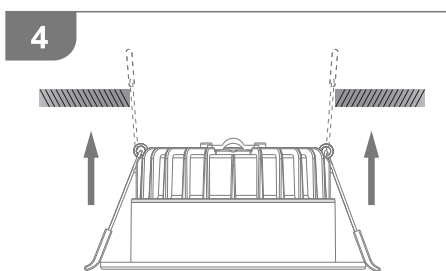| Voltage:	240V AC	Lumen (±5%):	Warm White 3000K - 800lm Neutral White 4000K - 900lm White 5700K - 850lm	Dimmable:	Yes
Power:	8W	Beam Angle:	60°	Operating Temp:	-20 ~ 45°C
IP Rating:	IP44	CCT:	3000K - 4000K - 5700K	Power Factor:	0.9
CRI:	≥80	Lifespan:	35,000hrs		

1

Cut out hole in ceiling

Cut out a hole in the ceiling. Ensure there is sufficient clearance in the area where you will be positioning the fitting.
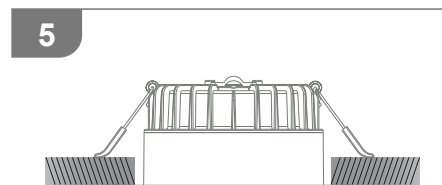
2

WW NW CW

Choose the prefered colour temperature via the switch on the controller.

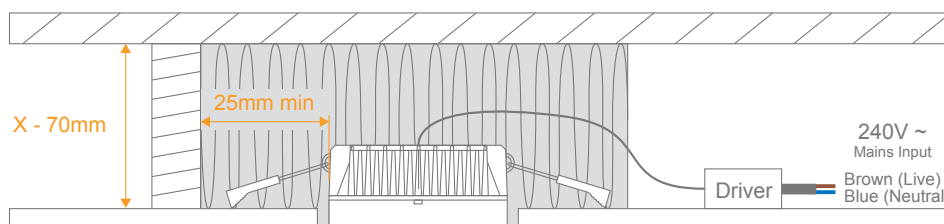**3**

LED Driver
SAA plug lead wire

Connect the fitting to the mains via the power plug.

4

Fit the fixture in the ceiling by lifting the spring clips upwards.

5

Once in place the spring clips should be against the top of the ceiling and support the fitting.

X - 70mm

25mm min

240V ~
Mains Input

Driver

Brown (Live)
Blue (Neutral)

Note: The LED driver in NOT suitable for covering with insulation material.

IC-4

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas