

DOMUS[®]

Lighting 2019 - 2020





Table of Contents

Interior

LED Downlights

Boost & Bliss Series	4-5
Deco Series	6-10
Tek Series	11
Splash Series	12-13
Aqua Series	14-16
Cell Series	17-23
Retro Series	24
Scoop Series	25
Neo Recessed Series	26-27
Deep Series	28-29
Expo Series	30-31
Neo-SM Series	32-36
Slotter Series	37-39

LED Globes

Key-GLS	40
Key-Spherical	41-43
Key-Fancy Round	44-45
Key-Candle	46-47
Key-Corn	48
Key-MR16 & GU10	48
Key-Par-30 & Par-38	49

Carbon Filament Lamps

Fila-Sphere	50-51
Fila-Pear	52
Fila-Candle	53
Fila-Banana	54-55

LED Cabinet Lights

Pocket Series	56
Astra Series	57-58

LED Profiles

Bloc-20 Series	60
Curve-20 Series	61
Nova Series	62-63
Opti Series	64-65

Omega-35 Series	66-67
Bloc-42 Series	68
Line-46 Series	69
Corner-16 Rnd & Sq	70-71
Luma-SM Series	72-73

LED Strips

Plex Series	74-81
Pleo Series	82-85

LED Controllers

Chameleon Series	86-102
------------------	--------

LED Oysters

Mondo Series	103
Solar Series	104-105
Easy Series	106-107
Sunset Series	108-109

LED Panels

Panel Series	110-111
Recessed Plaster Frames	112
Surface Mounted Frames	113-115

LED Directional Lights

Pistol Series	116-117
---------------	---------

LED Spotlights

Jet Series	118-119
------------	---------

LED Track & Track Heads

Thor Series	120-122
Mars Series	123
Trak-3 Series	124-127



Table of Contents

Pendants		LED Wall Lights & Vanity Lights	
Puffin Series	128-129	Lumaline-2 Series	190
Robin Series	130-131	Shadowline Series	191
Alice Series	132	Mirror Series	192-194
Eva Series	133		
Maya Series	134	Hollywood Lights	
Chelsea Series	135	HL804 Series	195
Diana Series	136		
Erin Series	137	Ceramic Wall Lights	
Alexa Series	137	BF Series	196-211
Jazz Series	138-139		
Evelyn Series	140-141	LED Battens	
Star Series	142-143	Bolt Series	212
Luna Series	144-145	Hydro Series	213
Zoey Series	146		
Laya Series	147	Bathroom Heaters	
Ruby Series	148-149	Profan Series	214-215
Jade-220 Series	150-151		
Jade-240 Series	152-153	Exterior	
Melody Series	154-155	LED Wall Lights	
Nova Series	156-157	Shadow Series	216-223
		Elite Series	224
LED Crystal Pendants		Alpha Series	225
Jupiter Series	158-159	Piper Series	226-227
Boomerang Series	160	Mojo Series	228-229
Everest Series	161	Whisper Series	230-231
Raindrop Series	162	Bell Series	232-233
Snowdrop Series	163	Sierra Series	234-235
Arctic Series	164	Block Series	236
Starlight Series	165-167	Edge Series	237
Rainbow Series	168	I-Wave Series	238
Venus Series	169	X-Wave Series	239
		Cup Series	240-241
LED Linear Profile Pendants		Nesta Series	242
Line-46 Series	170	Loftus Series	243
Bloc-42 Series	171	York Series	244-245
Pipe-60 Series	172-173		
LED Packaged Profiles			
Max-50 Series	174-181		
Max-75 Series	182-189		



Table of Contents

LED Steplights		Polycarbonate Series	
Zone Series	246-247	Poly-270 Oval Series	281
Zac Series	248-251	Poly-295 Oval Series	282
Zeke Series	252-254	Poly-295 Round Series	283
Step Series	255	Polydome Series	284
Blade Series	256	Poly-270 Round Series	285
Ixis Series	257	Polywall Series	286
You Series	258	Aluminium Post Accessories	287
		Polysphere Series	288
		Polymount Series	289
LED Spotlight			
Elite Adjustable	259	Bollard Heads & Posts	
Vision Series	260-261	BL100 Series	290
		76mm Aluminium Posts	291
LED Security Lights			
Muro Series	262-263	Traditional Exteriors	
		Monaco Series	292-297
LED Floodlights		Lisbon Series	298-304
Blaze Series	264-265	Siena Series	305-310
Flash Series	266	Vienna Series	311-317
		Vienna Large Series	318-320
LED Garden Lights		Chester Series	321-328
Zoom Series	267	Chester Large Series	329-331
Elite Spike	268	Paris Series	332-337
Shadow Series	268-269	Avignon Series	338-343
		Turin Series	344-349
LED Deck Lights		Turin Large Series	350-352
Vivid Series	270-271	Accessories	353-355
LED Inground Lights		Power Supplies	
Deka Series	272-273	LED Drivers	
Magneto Series	274-277	DM Series	356
Modula Series	278	WP Series (Weatherproof)	357-363
		Slim Series (Weatherproof)	364-365
Bunkers Lights			
Versa Series	279		
Cylindrical Series	280		




LED Downlights



Boost-10

- Anti-glare frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.

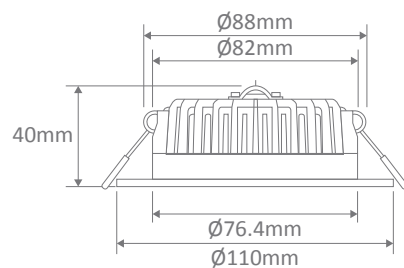

Cutout: Ø90mm

TRIO Technology dip switch

Item No.	Variant		Wattage	IP Rating	Lumen Output		
	White	CCT			Warm White 3000K	Neutral White 4000K	White 5700K
Boost-10	20726	TRIO	10W	54	750lm	780lm	800lm




LED Downlights



Bliss-10

- Flat face frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.

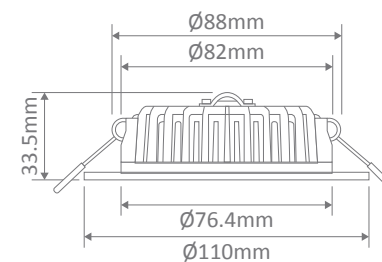

Cutout: Ø90mm

Item No.	Variant		Wattage	IP Rating	Lumen Output		
	White	CCT			Warm White 3000K	Neutral White 4000K	White 5700K
Bliss-10	20706	TRIO	10W	54	750lm	780lm	800lm



Deco Series


- Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.




Deco-8



Deco-13 Round



Cutout: Ø70-75mm



Cutout: Ø90mm

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output		
	Blk	Alu	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Deco-8-Rnd	20411	20412	20410	8W	44	TRIO	700lm	750lm	800lm
Deco-13-Rnd	20421	20422	20420	13W	44	TRIO	800lm	850lm	900lm



DECO-13-RND-WHT





Deco Series

- Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.




Deco-13 Square

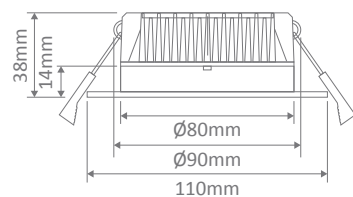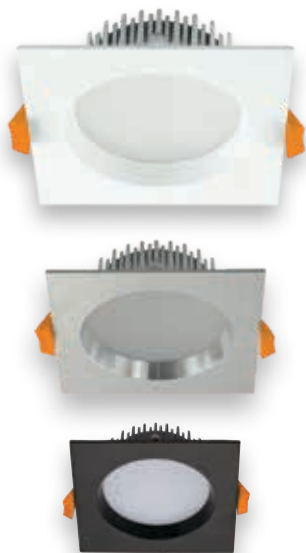

Cutout: Ø90mm

Deco-13 Tilt

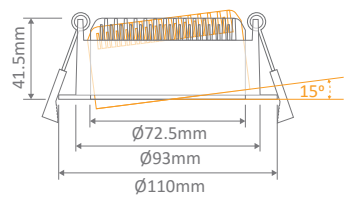

Cutout: Ø95mm




Deco Series

- Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.




Deco-20

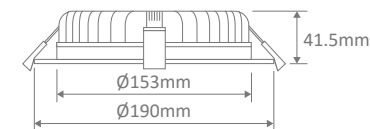

Cutout: Ø160 - Ø170mm

Deco-28

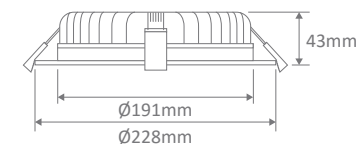

Cutout: Ø200 - Ø210mm

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output		
	Blk	Alu	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Deco-13 Sqr	20528	20427	20425	13W	44	TRIO	800lm	850lm	900lm
Deco-13 Tilt	21045	N/A	20430	13W	44	TRIO	800lm	850lm	900lm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output		
	Blk	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Deco-20	20433	20432	20W	44	TRIO	1700lm	1750lm	1800lm
Deco-28	20435	20434	28W	44	TRIO	2300lm	2350lm	2400lm




Deco Series

- 140mm Adaptor plate to suit Deco-13
- Cast Aluminium, powder coated.
- Ideal for covering larger holes from Ø100-130mm.



Deco-ADAP

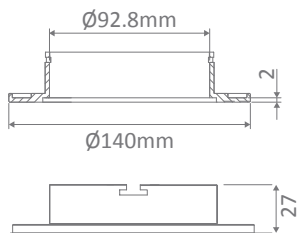

Item No.	Variant	
	Blk	Wht
Deco-Adap	20507	20504




Tek Series

- Flat face frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.



Tek-10 & Tek-13

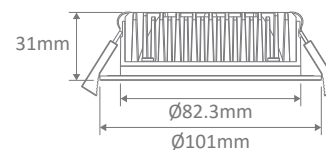

Ø90mm Cutout



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output		
	Blk	Schr	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Tek-10	20620	20442	20440	10W	44	TRIO	700lm	750lm	800lm
Tek-13	20621	20445	20443	13W	44	TRIO	800lm	850lm	900lm




Splash Series

- Round curved face and square flat face frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Suitable for wet areas.
- DALI dimming optional extra upon request.




Splash-13 Round



Cutout: Ø90mm

Splash-13 Square



Cutout: Ø90mm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output		
	Blk	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Splash-13-Rnd	20622	20436	13W	54	TRIO	800lm	850lm	900lm
Splash-13-Sqr	20623	20438	13W	54	TRIO	800lm	850lm	900lm



SPLASH-13-RND-WHT




LED Downlights

Aqua Series




- COB LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Suitable for wet areas.
- DALI dimming optional extra upon request.

Aqua-10

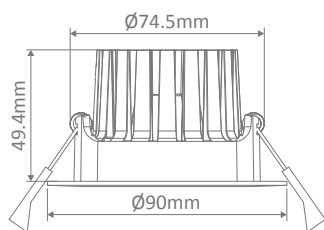

Cutout: Ø75-80mm

Aqua-13

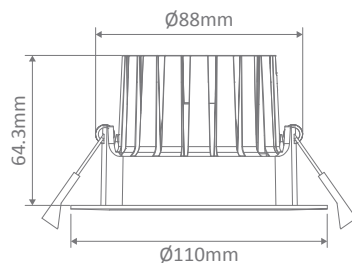

Cutout: Ø90-95mm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Aqua-10	21206	21222	10W	65*	3000K	870lm
	21210	21226			4000K	980lm
	21214	21230			5000K	930lm
Aqua-13	21238	21254	13W	65*	3000K	1130lm
	21242	21258			4000K	1300lm
	21246	21262			5000K	1220lm

*Downlight housing has been tested and is rated at IP65. Test conducted in an installed application from the underside of the downlight.



AQUA-10-WHT




LED Downlights

Aqua Series

- COB LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Suitable for wet areas.
- DALI dimming optional extra upon request.



Aqua-13-Tilt

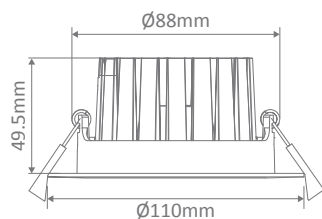

Tilt: 30°
Cutout: Ø90-95mm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Aqua-13-Tilt	21306	21322	13W	65*	3000K	1130lm
	21310	21326			4000K	1300lm
	21314	21330			5000K	1220lm

*Downlight housing has been tested and is rated at IP65. Test conducted in an installed application from the underside of the downlight.



LED Module Downlights


Cell Series

- COB LED Chip.
- Interchangeable lens.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.
- A replaceable solution to re-lamp when used with compatible frames.



13W

9W

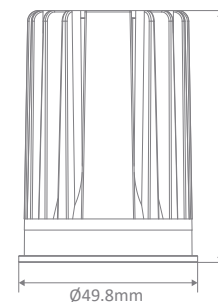

Cell-9 & 13



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output	Beam Angle
	9W	13W					
Cell	27000	27016	9W/13W	44	2700K	800lm/1200lm	60°
	27001	27017					36°
	27002	27018					24°
	27003	27019					15°
Cell	27004	27020	9W/13W	44	3000K	810lm/1215lm	60°
	27005	27021					36°
	27006	27022					24°
	27007	27023					15°
Cell	27008	27024	9W/13W	44	4000K	910lm/1310lm	60°
	27009	27025					36°
	27010	27026					24°
	27011	27027					15°
Cell	27012	27028	9W/13W	44	5000K	880lm/1150lm	60°
	27013	27029					36°
	27014	27030					24°
	27015	27031					15°



LED Module Downlights




Cell Series

- COB LED Chip.
- Interchangeable lens.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.
- A replaceable solution to re-lamp when used with compatible frames.



Cell-12



Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output			Beam Angle
					Warm White 3000K	Neutral White 4000K	White 5700K	
Cell-12-TRIO	27069	12W	44	TRIO	870lm	1000lm	990lm	60°
	27068							36°
	27067							24°
	27066							15°





LED Module Downlights

Cell Series

- COB LED Chip.
- Interchangeable lens.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.
- A replaceable solution to re-lamp when used with compatible frames.



Cell-17

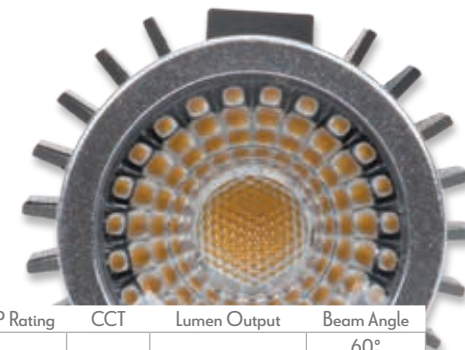

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Beam Angle
Cell-17	27032	17W	44	2700K	1500lm	60°
	27033					36°
	27034					24°
	27035					15°
Cell-17	27036	17W	44	3000K	1550lm	60°
	27037					36°
	27038					24°
	27039					15°
Cell-17	27040	17W	44	4000K	1650lm	60°
	27041					36°
	27042					24°
	27043					15°
Cell-17	27044	17W	44	5000K	1700lm	60°
	27045					36°
	27046					24°
	27047					15°



Choose a module



9W-13W




12W




17W

Choose a frame


D75



D90



T75




T90




P75 - K75




W90




S1



S2




Press down firmly until module clicks into frame.




Multiple Combinations

CELL-D75




Cutout: $\varnothing 75-77\text{mm}$

CELL-D90




Cutout: $\varnothing 90-92\text{mm}$

CELL-T75




Cutout: $\varnothing 72-75\text{mm}$

CELL-T90




Cutout: $\varnothing 80-85\text{mm}$

CELL-K75
CELL-P75




Cutout: $\varnothing 70-75\text{mm}$

CELL-W90




Cutout: $\varnothing 88-90\text{mm}$
W90 wall washer frame is set at a 45° angle.

CELL-S1



Cutout: L100mm x W100mm

CELL-S2

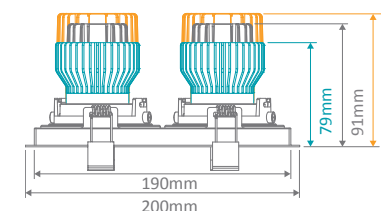

Cutout: L190mm x W100mm



LED Module Downlights



Item No.	Variant	Frame Colour
Cell-D75	27048	White
	27049	Black

Cell-D90	27050	White
	27051	Black

Cell-T75	27052	White
	27053	Black

Cell-T90	27054	White
	27055	Black

Cell-K75	27064	White
	27065	Black


Cell-P75	27062	White
	27063	Black

Cell-W90	27056	White
	27057	Black

Cell-S1	27058	White
	27059	Black

Cell-S2	27060	White
	27061	Black

Please note the codes above are for frames only.



CELL-D90-WHT




LED Downlight Retrofit Lamp

Retro-10 Series

- COB LED Chip.
- Fully dimmable with suitable dimmers.



Retro-10

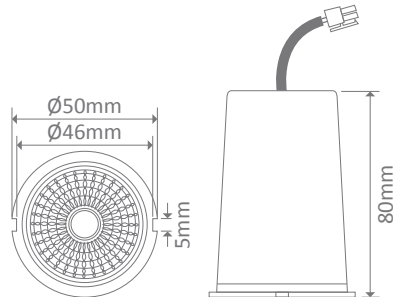

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Retro-10	20490	10W	20	3000K	605lm
	20491			5000K	630lm




LED Downlights

Scoop Series


- COB LED Chip.
- Adjustable and Directional.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.



Scoop-13

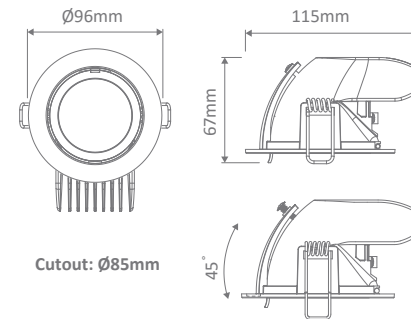

Scoop-25

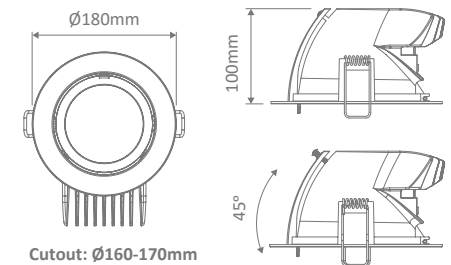

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Scoop-13	20450	20570	13W	20	3000K	850lm
	20451	20568			4000K	900lm
	20452	20571			5000K	950lm
Scoop-25	20453	20574	25W	20	3000K	1800lm
	20454	20569			4000K	1880lm
	20456	20575			5000K	1950lm




Neo Recessed Series




- COB LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.

Neo-13-Rec



Neo-25-Rec



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Neo-13-Rec	20457	20576	13W	44	3000K	850lm
	20458	20582			4000K	880lm
	20459	20577			5000K	900lm
Neo-25-Rec	20460	20578	25W	44	3000K	2200lm
	20461	20583			4000K	2250lm
	20462	20579			5000K	2300lm




Neo Recessed Series



- COB LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.

Neo-35-Rec

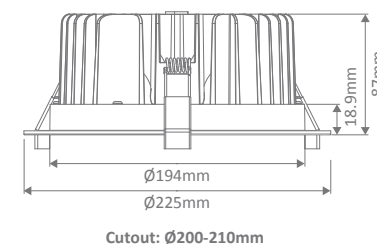

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Neo-35-Rec	20463	20580	35W	44	3000K	3100lm
	20464	20584			4000K	3150lm
	20465	20581			5000K	3200lm




LED Downlights

Deep Series




- COB LED Chip.
- Anti-glare deep-set frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.

Deep-10

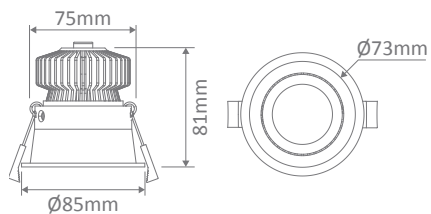

Cutout: Ø75mm

Deep-13

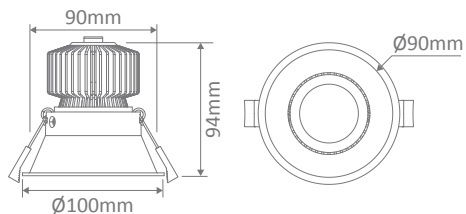

Cutout: Ø90mm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Deep-10	20667	20670	10W	40	3000K	767lm
	20668	20671			4000K	833lm
	20669	20672			5000K	900lm
Deep-13	20674	20677	13W	40	3000K	987lm
	20675	20678			4000K	1053lm
	20676	20679			5000K	1120lm



DEEP-13-WHT





Expo Series

- Anti-glare deep-set frame.
- Low UGR ≤ 19 .
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.





Expo-10



Cuttout: Ø90-95mm

Expo-25



Cuttout: Ø150-165mm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output		
	Blk	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Expo-10	20710	20711	10W	44	TRIO	710lm	780lm	850lm
Expo-25	20712	20713	25W	44	TRIO	2200lm	2400lm	2600lm




Expo Series

- Anti-glare deep-set frame.
- Low UGR ≤ 19 .
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI dimming optional extra upon request.



Expo-35

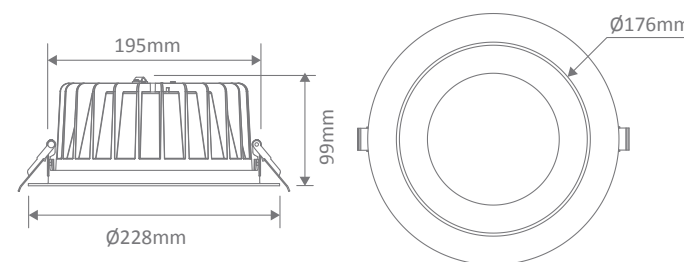

Cuttout: Ø200-210mm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output		
	Blk	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Expo-35	20714	20715	35W	44	TRIO	3650lm	3750lm	3850lm




LED Downlights

Neo-SM Series


- COB LED Chip.
- Cast Aluminium frame.
- Fully dimmable with suitable dimmers.
- DALI dimming (Remote Driver) optional extra upon request.



Neo-13-SM



Neo-25-SM



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Neo-13-SM	20680	20684	13W	54	3000K	850lm
	20683	20688			4000K	880lm
	20681	20685			5000K	900lm
Neo-25-SM	20686	20690	25W	54	3000K	2200lm
	20689	20694			4000K	2250lm
	20687	20691			5000K	2300lm




LED Downlights

Neo-SM Series


- COB LED Chip.
- Cast Aluminium frame.
- Fully dimmable with suitable dimmers.
- DALI dimming (inbuilt driver) optional extra upon request.



Neo-35-SM



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Neo-35-SM	20692	20696	35W	54	3000K	3100lm
	20698	20699			4000K	3150lm
	20693	20697			5000K	3200lm

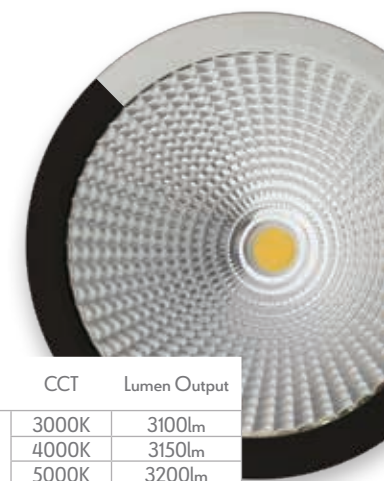



NEO-10-SM-TILT-BLK



LED Downlights


Neo-SM Series

- COB LED Chip.
- Cast Aluminium frame.
- Adjustable and Directional.
- Fully dimmable with suitable dimmers.
- DALI dimming (Remote Driver) optional extra upon request.



Interior

Neo-10-SM-Tilt



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Neo-10-SM-Tilt	21115	21127	10W	20	3000K	900lm
Neo-10-SM-Tilt	21118	21130	10W	20	4000K	955lm
Neo-10-SM-Tilt	21121	21133	10W	20	5000K	1010lm




Neo-SM Series

- COB LED Chip.
- Cast Aluminium frame.
- Adjustable and Directional.
- Fully dimmable with suitable dimmers.
- DALI dimming (Remote Driver) optional extra upon request.



Neo-20-SM-Tilt




Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Neo-20-SM-Tilt	21139	21151	20W	20	3000K	2100lm
Neo-20-SM-Tilt	21142	21154	20W	20	4000K	2200lm
Neo-20-SM-Tilt	21145	21157	20W	20	5000K	2300lm




Slotter Series

- Die-cast Aluminium trim and pressed metal body.
- Compatible with most MR16 style LED lamps and modules (not included).
- Anti-glare deep-set frame.
- Directional.




DSL-1S



DSL-2B



DSL-3B

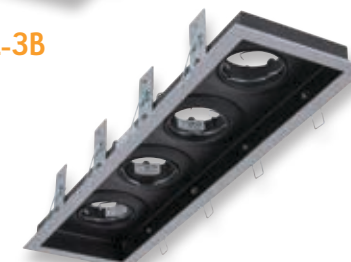

DSL-4B






DSL-4SQ



LED Downlight Frames

Interior

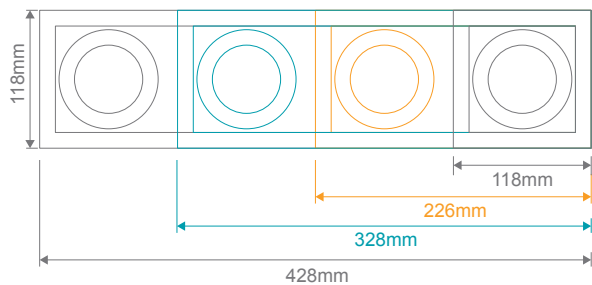

Item No.	Variant	Cutout	Colour
DSL/1S	70001	102mm x 110mm	Silver Frame
	70002		White Frame
DSL/2B	70003	208mm x 110mm	Silver Frame
	70004		White Frame
DSL/3B	70005	308mm x 110mm	Silver Frame
	70006		White Frame
DSL/4B	70007	408mm x 110mm	Silver Frame
	70008		White Frame
DSL/4SQ	70009	215mm x 208mm	Silver Frame
	70010		White Frame



Requires: LED Downlight Retrofit Lamps (Not Included).





LED Globes

Key-GLS Frost



Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-GLS	65000	9.2W	75W	2700K	B22	≥80	1055lm	15,000h
	65002			6500K			1148lm	
	65004			2700K	E27		1055lm	
	65006			6500K			1148lm	



DOMUS®

domuslighting.com.au



LED Globes

Key G80 Spherical



Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-G80 Spherical	65140	9.5W	60W	2700K	B22	≥80	806lm	15,000h
	65142			6500K	E27			
	65144			2700K				
	65146			6500K				



DOMUS®

domuslighting.com.au



LED Globes

Key G95 Spherical





Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-G95 Spherical	65150	13W	75W	2700K	B22	≥80	1055lm	15,000h
	65152			6500K				
	65154			2700K	E27			
	65156			6500K				



LED Globes

Key G120 Spherical



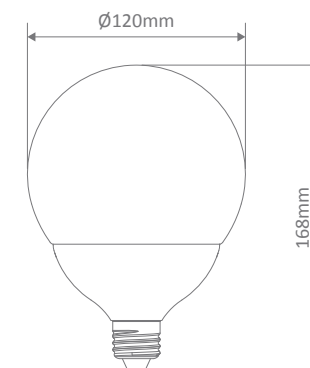
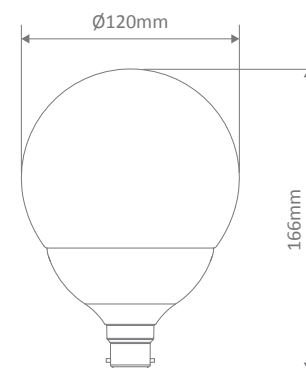


Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-G120 Spherical	65160	17W	100W	2700K	B22	≥80	1521lm	15,000h
	65162			6500K				
	65164			2700K	E27			
	65166			6500K				



LED Globes

Key-Fancy Round Frost







Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-FR-Frost	65020	5.7W	40W	2700K	B15	≥80	470lm	15,000h
	65022			6500K				
	65024			2700K	B22			
	65026			6500K				
	65028			2700K	E14			
	65030			6500K				
	65032			2700K	E27			
	65034			6500K				



LED Globes

Key-Fancy Round Clear







Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-FR-Clear	65040	6W	40W	2700K	B15	≥80	470lm	15,000h
	65042			6500K				
	65044			2700K	B22			
	65046			6500K				
	65048			2700K	E14			
	65050			6500K				
	65052			2700K	E27			
	65054			6500K				



LED Globes

Key Candle Frost







Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-Can-Frost	65060	5.7W	40W	2700K	B15	≥80	470lm	15,000h
	65062			6500K	B22			
	65064			2700K				
	65066			6500K	E14			
	65068			2700K				
	65070			6500K	E27			
	65072			2700K				
	65074			6500K				



LED Globes

Key Candle Clear




Item No.	Variant	Watt	Watt Equiv.	CCT	Cap	CRI	Lumen Output	Lifetime
Key-Can-Clear	65080	6W	40W	2700K	B15	≥80	470lm	15,000h
	65082			6500K				
	65084			2700K	B22			
	65086			6500K				
	65088			2700K	E14			
	65090			6500K				
	65092			2700K	E27			
	65094			6500K				



LED Globes

Key Corn Series

- High Intensity Light Output.

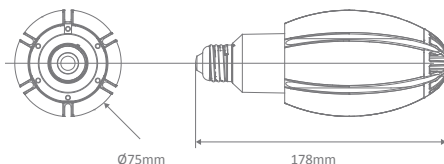



Item No.	Variant	Watt	CCT	Cap	CRI	Lumen Output	Lifetime
Key-Corn	65202	22W	3000K	E27	≥75	2500lm	50,000h
	65204		4000K			2750lm	
	65206		5000K			3000lm	

Key-MR16-6 & GU10-6



Key-MR16-6

Key-GU10-6



Requires: 12V DC Constant Voltage LED Driver

Item No.	Variant	Watt	IP Rating	CCT	Cap	CRI	Lumen Output	Lifetime
Key-MR16-6	65012	6W	20	3000K	GU5.3	≥80	450lm	30,000h
	65014			5000K			500lm	
Key-GU10-6	65008	6W	20	3000K	GU10	≥80	450lm	30,000h
	65010			5000K			500lm	





LED Globes

Key-PAR-30 & PAR-38 Series



Key-PAR-30

Key-PAR-38

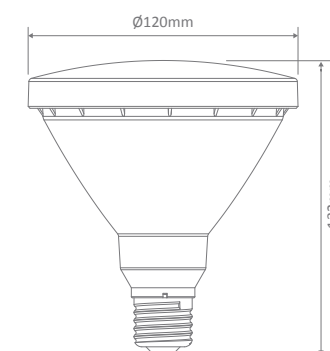



Item No.	Variant	Watt	Watt Equiv.	IP Rating	CCT	Cap	CRI	Lumen Output	Lifetime
Key-PAR-30	65036	12W	75W	44	3000K	E27	≥80	1050lm	30,000h
	65038				5000K			1100lm	
Key-PAR-38	65195	16W	90W	44	3000K	E27	≥80	1350lm	30,000h
	65197				5000K			1400lm	



Filament-G95-Sphere

- Tungsten Carbon Filament Lamp.





Item No.	Variant	Watt	CCT	Cap	Lumen Output	Lifetime
Fila-G95	65915	25W	2000K	B22	175lm	2,500+ hrs
	65916			E27		



Filament-G125-Sphere

- Tungsten Carbon Filament Lamp.





Item No.	Variant	Watt	CCT	Cap	Lumen Output	Lifetime
Fila-G125	65919	25W	2000K	B22	175lm	2,500+ hrs
	65920			E27		



Filament-Pear

- Tungsten Carbon Filament Lamp.





Item No.	Variant	Watt	CCT	Cap	Lumen Output	Lifetime
Fila-Pear	65912	25W	2000K	B22	175lm	2,500+ hrs
	65913			E27		



Filament-Candle

- Tungsten Carbon Filament Lamp.



Item No.	Variant	Watt	CCT	Cap	Lumen Output	Lifetime
Fila-Candle	65900	25W	2000K	B15	175lm	2,500+ hrs
	65901			E14		



Filament-Mini Banana

- Tungsten Carbon Filament Lamp.




Item No.	Variant	Watt	CCT	Cap	Lumen Output	Lifetime
Fila-Mini-Ban	65904	25W	2000K	B22	175lm	2,500+ hrs
	65905			E27		



Filament-Banana

- Tungsten Carbon Filament Lamp.



Item No.	Variant	Watt	CCT	Cap	Lumen Output	Lifetime
Fila-Ban	65908	20W	2000K	B22	140lm	2,500+ hrs
	65909			E27		




LED Cabinet Lights

Pocket Series

- Complete with driver.
- Cast Aluminium frame and heat sink.




Pocket-3



Cutout: Ø35mm

Pocket-3- Tilt



Cutout: Ø45mm

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Pocket-3	21161	21170	3W	20	3000K	125lm
	21164	21173			4000K	
	21167	21176			5000K	
Pocket-3-Tilt	21179	21188	3W	20	3000K	125lm
	21182	21191			4000K	
	21185	21194			5000K	



LED Cabinet Lights


Astra Series



Recessed



Surface Mounted

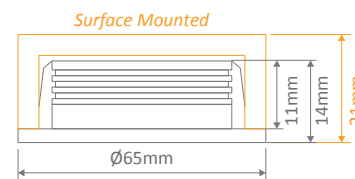

Recessed Cutout: Ø57mm



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Slr	Wht				
Astra	21284	21280	21282	3.6W	20	3000K	200lm
	21285	21281	21283			5000K	205lm

Requires 12VDC Constant Voltage LED Driver - Wire in Parallel



ASTRA-SLR



How to build a profile

1- Choose your application and profile

(from selected range "pp 60-73")



2- Finish colour



Black



Anodised Aluminium



White

3- Measure the area of application



4- Choose the desired light output

(wattage and colour temperature from selected range "pp 74-83")



5- Choose your driver

(from selected range "pp 356-365")

$$\text{twr} = \text{wpm} \times l + 20\%$$

twr =	total wattage required
wpm =	watts per metre
l =	length



Bloc-20




Specification:

Installation:	Surface, wall or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Square (PMMA) Opal colour
Length:	2500mm continuous*
Size:	(W) 19.7mm, (H) 19.6mm
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Accessories to be ordered separately.

*** Special powder coat finishes upon request. Surcharges apply.

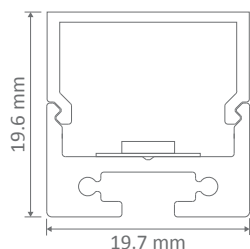

Aluminium



White



Suspension Kit

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Item No	Variant			Details
	Blk	Alu	Wht	
Bloc-20-SM	22068	22010	22069	Sold per 1 metre
Susp-Kit-2M		22041		2 Metres standard height, sold individually



Curve-20




Specification:

Installation:	Surface, wall or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Curved (PMMA) Opal colour
Length:	2500mm continuous*
Size:	(W) 19.7mm (H) 19.6mm
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Accessories to be ordered separately.

*** Special powder coat finishes upon request. Surcharges apply.



Aluminium



White



Suspension Kit

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Curve-20-SM	22066	22008	22062	Sold per 1 metre
Susp-Kit-2M		22041		2 Metres standard height, sold individually



Nova-SM




Specification:

Installation:	Surface or wall mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Flat (PMMA) High Output Opal/Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 17mm, (H) 8mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Nova-SM	22078	22045	22079	Sold per 1 metre



Nova-Recessed





Specification:

Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Flat (PMMA) High Output Opal/Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 23mm, (H) 8mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.

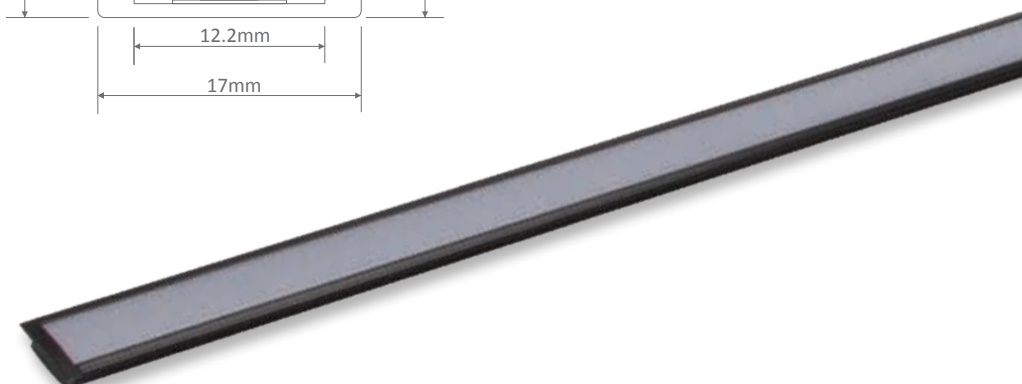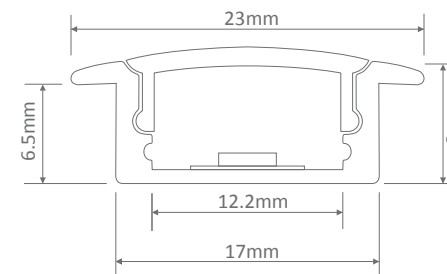

Simulation



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Nova-Rec	22092	22048	22093	Sold per 1 metre



Opti-SM




Specification:

Installation:	Wall or Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Curved (PC) Opal colour
Length:	3000mm continuous*
Size:	Profile (W) 20.6mm, (H) 13.8mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Opti-SM	22062	22001	22063	Sold per 1 metre



Opti-Recessed





Specification:

Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Curved (PC) Opal colour
Length:	3000mm continuous*
Size:	Profile (W) 26.7mm, (H) 16.39mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.

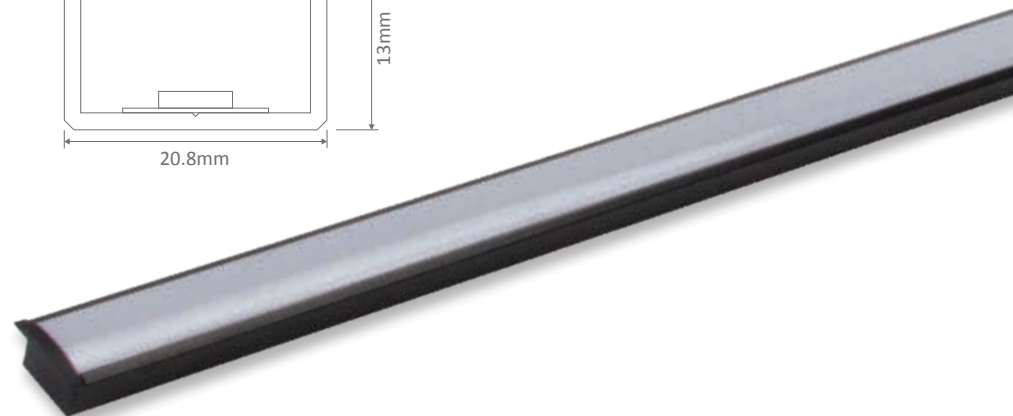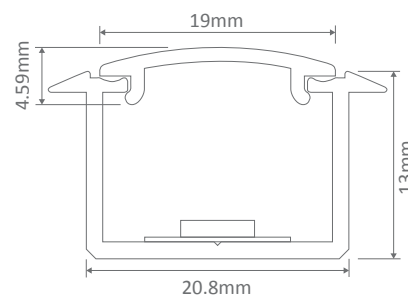

Simulation



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Opti-Rec	22064	22005	22065	Sold per 1 metre



Omega-35-SM





Specification:

Installation: Surface, wall or suspension mounted**Material:** Extruded Aluminium 6063**Finish:** Natural clear anodised, Black or White**Diffuser:** Flat (PMMA) high output Frost colour**Length:** 2500mm continuous***Size: Profile** (W) 34.8mm, (H) 37.5mm**Accessories:** Wire suspensions****Special:** Custom powder coated colour upon request*****Driver installation:** Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Accessories to be ordered separately.

*** Special powder coat finishes upon request. Surcharges apply.

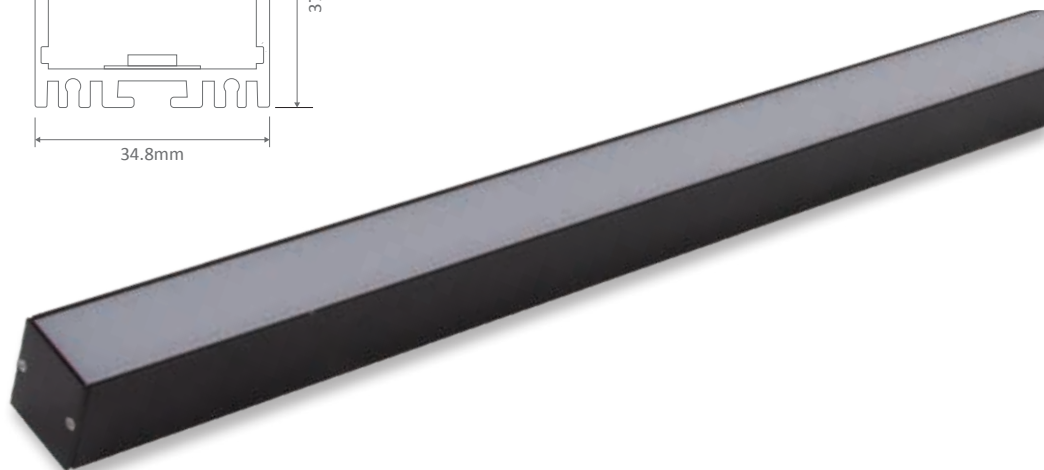

Aluminium



White



Suspension Kit

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Omega-35-SM	22076	22050	22077	Sold per 1 metre
Susp-Kit-2M		22041		2 Metres standard height, sold individually



Omega-35 Recessed





Specification:


Installation: Recess mounted**Material:** Extruded Aluminium 6063**Finish:** Natural clear anodised, Black or White.**Diffuser:** Flat (PMMA) high output Frost colour**Length:** 2500mm continuous***Size:** Profile (W) 43.8mm, (H) 34.8mm**Special:** Custom powder coated colour upon request****Driver installation:** Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.



Simulation



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Omega-35-Rec	22074	22034	22075	Sold per 1 metre



Bloc-42



Specification:



Installation:	Surface, wall or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Wrap around (PMMA) Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 42.5mm, (H) 56mm
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver installation:	Remote or integral driver required****

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Accessories to be ordered separately.

*** Special powder coat finishes upon request. Surcharges apply.

**** For integral drivers use: SLIM-30, SLIM-60, SLIM-80 (12 OR 24V DC options)



Aluminium



White



Suspension Kit

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Bloc-42	22294	22020	22295	Sold per 1 metre
Susp-Kit-2M		22041		2 Metres standard height, sold individually



Line-46



Specification:



Installation:	Surface or suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Flat high output Opal/Frost colour
Length:	5000mm continuous*
Size:	Profile (W) 46mm, (H) 68.5mm
Accessories:	Wire suspensions**
Special:	Custom powder coated colour upon request***
Driver installation:	Remote or integral driver required****

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Accessories to be ordered separately.

*** Special powder coat finishes upon request. Surcharges apply.

**** For integral drivers use: SLIM-30, SLIM-60, SLIM-80 (12 OR 24V DC options)

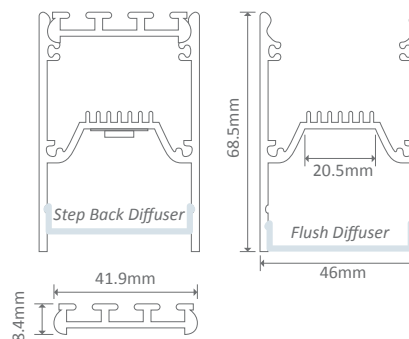

Aluminium



White



Suspension Kit

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Line-46	22290	22039	22291	Sold per 1 metre
Susp-Kit-2M		22041		2 Metres standard height, sold individually



Corner-16-Rnd





Specification:

Installation:	Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Curved (PMMA) Opal/Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 16mm, (H) 16mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.

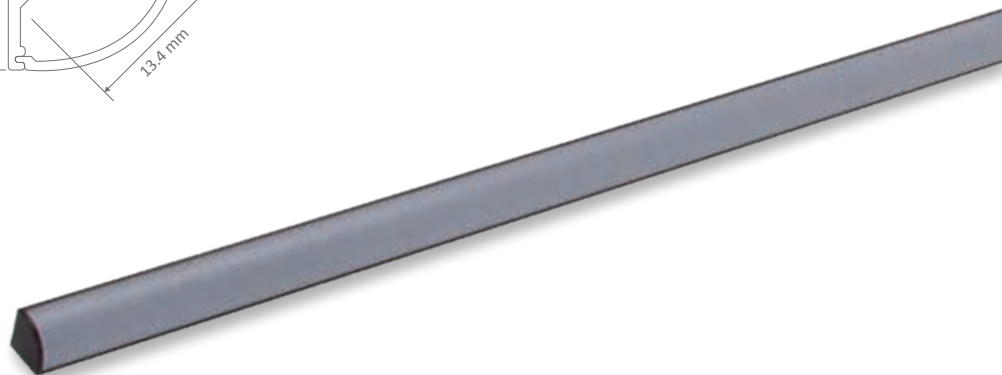

Simulation



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Corner-16-Rnd	22070	22026	22071	Sold per 1 metre



Corner-16-Sqr





Specification:

Installation:	Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Square (PMMA) Opal colour
Length:	2500mm continuous*
Size:	Profile (W) 16mm, (H) 16mm
Special:	Custom powder coated colour upon request**
Driver Installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.

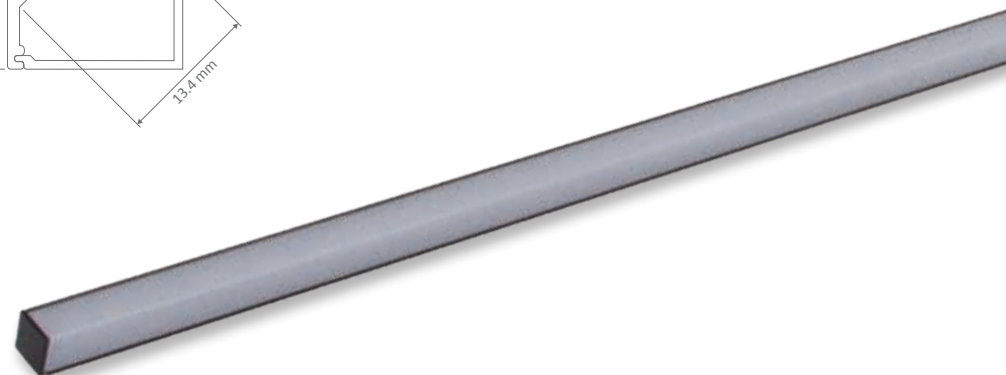

Simulation



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Corner-16-Sqr	22072	22028	22073	Sold per 1 metre



Luma-SM




Specification:

Installation:	Wall mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, Black or White
Diffuser:	Curved (PMMA) Opal/Frost colour
Length:	2500mm continuous*
Size:	Profile (W) 30mm, (H) 25mm
Special:	Custom powder coated colour upon request**
Driver installation:	Remote driver required

* Profile sold per metre. Can be cut to suit any length. Includes Aluminium end caps.

** Special powder coat finishes upon request. Surcharges apply.



Aluminium



White

Compatible PLEX LED Strip

7.2	14.4	19.2
•	•	•

Profile	Variant			Details
	Blk	Alu	Wht	
Luma-SM	22042	22018	22043	Sold per 1 metre



Plex-7.2



Specification:


Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	60
Wattage Per Metre:	7.2W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	50mm
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Plex-7.2	20315	3000K	518lm/m	Warm White
	20316	4000K	547lm/m	Neutral White
	20317	5000K	547lm/m	White

2700K available upon request

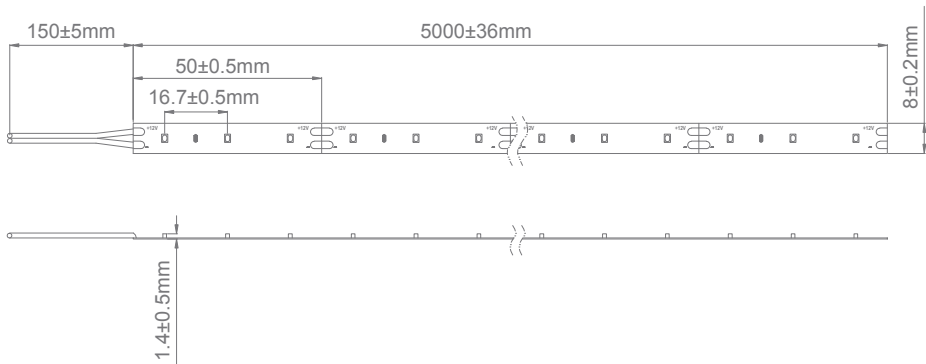

Plex-14.4



Specification:


Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	120
Wattage Per Metre:	14.4W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	25mm
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Plex-14.4	20319	3000K	1037lm/m	Warm White
	20320	4000K	1094lm/m	Neutral White
	20321	5000K	1094lm/m	White

2700K available upon request

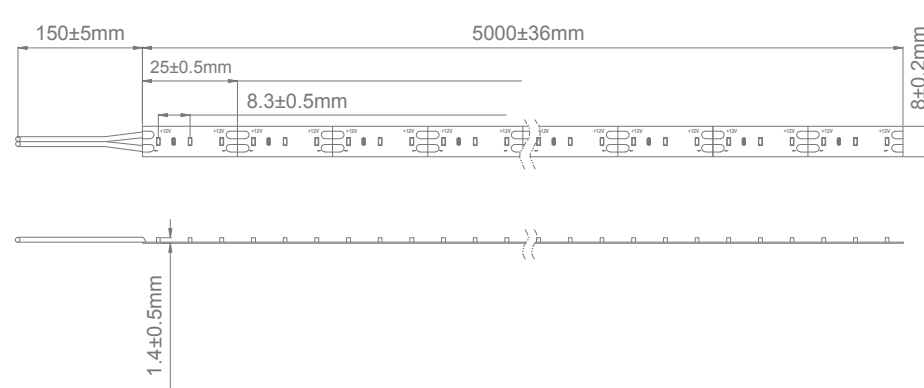



Plex-19.2

VDC
24Replacement
Warranty
3yr

Specification:


Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	240
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	25mm
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Plex-19.2	20323	3000K	1382lm/m	Warm White
	20324	4000K	1498lm/m	Neutral White
	20325	5000K	1498lm/m	White

2700K available upon request

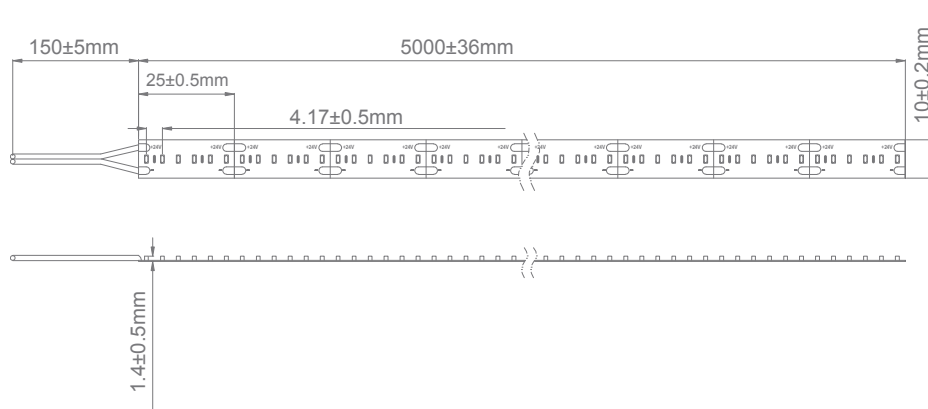

Plex-19.2-RGBWW

VDC
24Replacement
Warranty
3yr

Specification:


Colours:	RGB + Warm White colour temperatures
Light Source:	5050 SMD LED
Colour Temperature:	RGB + 3000K
CRI:	80
Number of LED Per Metre:	60
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP20
Cutting Increments/Sections:	100mm
Requires:	24V DC Constant Voltage LED Driver & Colour Controller***
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

*** Requires CHAM03, CHAM04 or CHAM40.

Strip	Variant	CCT	Lumen Output
Plex-19.2-RGBWW	20327	RGB + 3000K	N/A

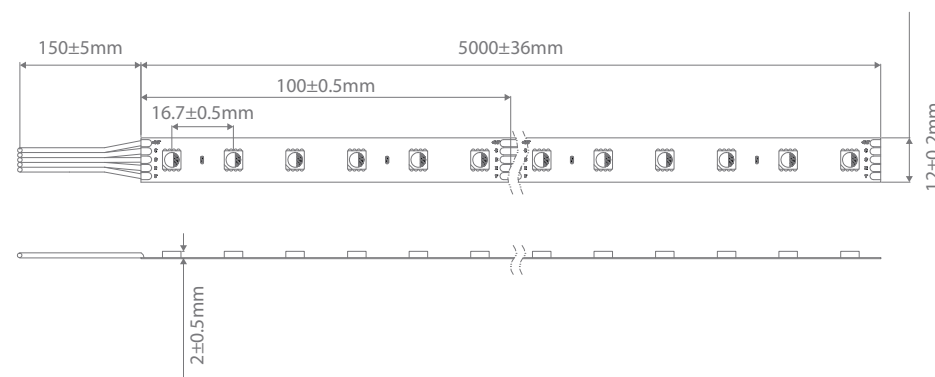



LED Strip

PLEX-7.2-IP66-3K



Plex-7.2-IP66

Specification:


Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	60
Wattage Per Metre:	7.2W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	50mm
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Plex-7.2-IP66	20333	3000K	518lm/m	Warm White
	20334	4000K	547lm/m	Neutral White
	20335	5000K	547lm/m	White

2700K available upon request

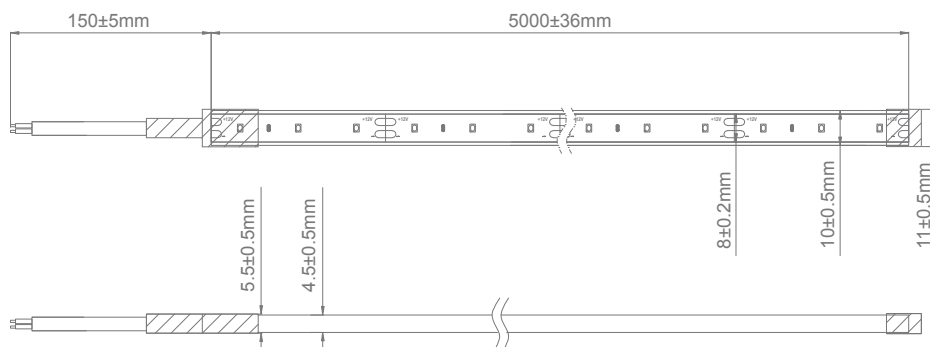

LED Strip

PLEX-14.4-IP66-4K



Plex-14.4-IP66

Specification:


Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	120
Wattage Per Metre:	14.4W
Input Voltage:	12V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	25mm
Requires:	12V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Plex-14.4-IP66	20337	3000K	1100lm/m	Warm White
	20338	4000K	1180lm/m	Neutral White
	20339	5000K	1180lm/m	White

2700K available upon request

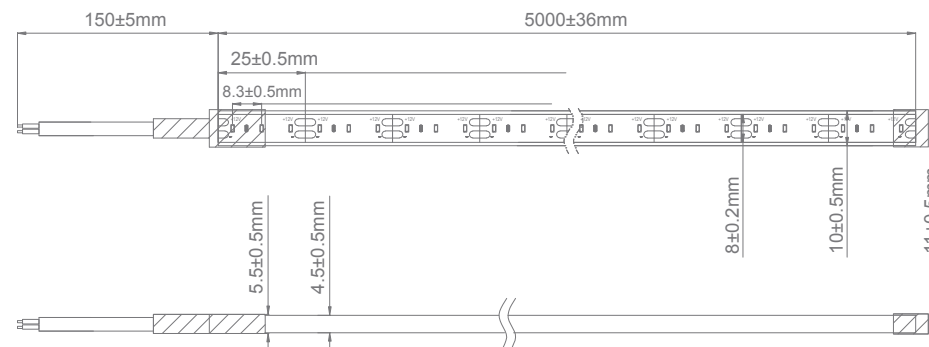



LED Strip



LED Strip

PLEX-19.2-IP66-5000K

PLEX-19.2-IP66-RED

Plex-19.2-IP66



Specification:


Colours:	3 colour temperatures
Light Source:	2110 SMD LED
Colour Temperature:	3000K, 4000K, & 5000K
CRI:	90
Number of LED Per Metre:	240
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	25mm
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Plex-19.2-IP66	20341	3000K	1382lm/m	Warm White
	20342	4000K	1498lm/m	Neutral White
	20343	5000K	1498lm/m	White

2700K available upon request

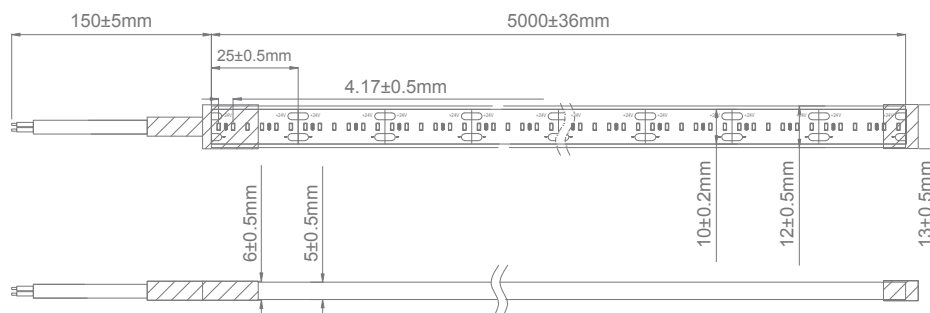

Plex-19.2-IP66-RGBWW



Specification:


Colours:	RGB + Warm White colour temperatures
Light Source:	5050 SMD LED
Colour Temperature:	RGB + 3000K
CRI:	90
Number of LED Per Metre:	60
Wattage Per Metre:	19.2W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	100mm
Requires:	24V DC Constant Voltage LED Driver & Colour Controller***
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

*** Requires CHAM03, CHAM04 or CHAM40.

Strip	Variant	CCT	Lumen Output
Plex-19.2-IP66-RGBWW	20344	RGB + 3000K	N/A

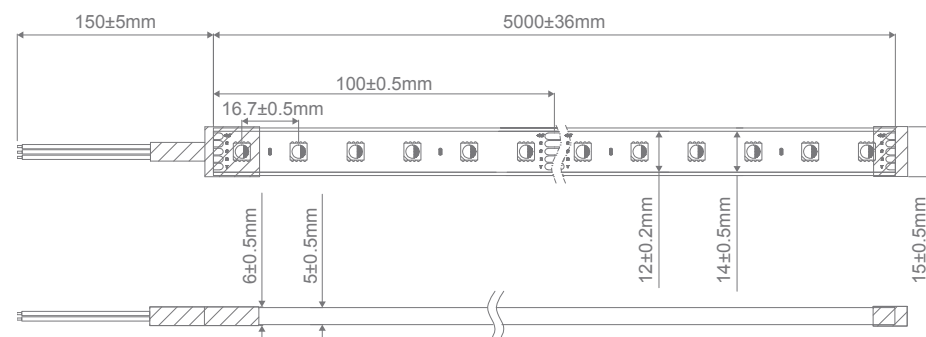



LED Strip



LED Strip

PLEO-14.4-3K

PLEO-14.4-S-4K

Pleo-14.4



- LED Neon Flex

Specification:


Colours:	3 colour temperatures
Light Source:	2835 SMD LED
Colour Temperature:	3000K, 4000K & 5000K
CRI:	90
Number of LED Per Metre:	140
Wattage Per Metre:	14.4W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	50mm
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Pleo-14.4	20353	3000K	1181lm/m	Warm White
	20354	4000K	1253lm/m	Neutral White
	20355	5000K	1253lm/m	White

2700K available upon request

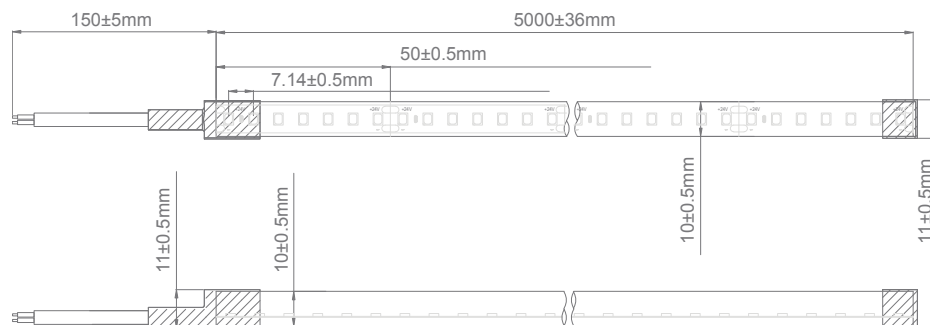

Pleo-14.4-S



- LED Neon Flex
- Side Emitting
- Ideal for curved features

Specification:


Colours:	3 colour temperatures
Light Source:	2835 SMD LED
Colour Temperature:	3000K, 4000K & 5000K
CRI:	90
Number of LED Per Metre:	140
Wattage Per Metre:	14.4W
Input Voltage:	24V DC
Beam angle:	120°
Wiring:	Parallel
IP Rating:	IP66
Cutting Increments/Sections:	50mm
Requires:	24V DC Constant Voltage LED Driver
Dimmable:	Yes*
IES files:	Yes**

* For dimming options please refer to the controller section for further details.

** Available upon request.

Strip	Variant	CCT	Lumen Output	Colour Simulation
Pleo-14.4-S	20357	3000K	320lm/m	Warm White
	20358	4000K	346lm/m	Neutral White
	20359	5000K	370lm/m	White

2700K available upon request

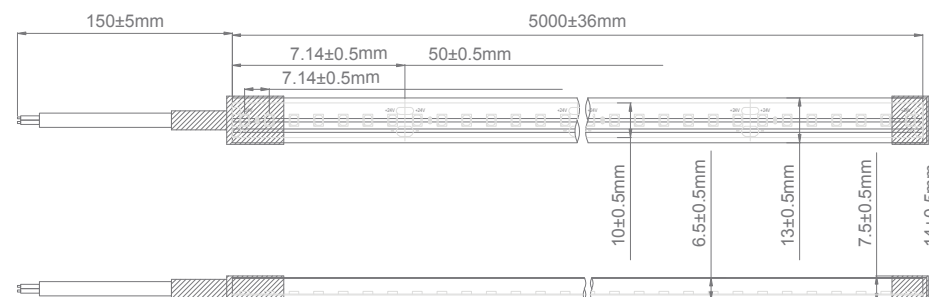



PLEX-14.4-3K



CHAM-01 Multi-function RGB Colour Controller

The CHAMELEON-01 is a basic stand-alone colour controller for use with RGB colour changing luminaires and flexible LED strip lighting. Functions include pre-set colour functions such as smooth colour transitions, solid colour flashing or static colour. Other useful functions include the ability to perform functions by pressing the buttons located on the front housing. An auxiliary switch plate can be used to mimic the CHAMELEON-01 functions if needed. This controller is simple but very useful and will make colour changing applications simple to create.

Specification:


Type of controller:	RGB 3ch Controller
Method of control:	Press buttons
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 155mm x (W) 74mm x (H) 29mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	3 x 5A
Output wattage (W):	12V DC - 60W per channel (x3). 24V DC - 120W per channel (x3).
Pre-set colour functions:	Yes
Pause function:	Yes
Dimming function:	Yes
Speed function:	Yes
Remote switching function:	Yes*
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver ***

* Remote switch plate ability (not included) accessories from any electrical wholesaler.

** Data repeater recommended for run lengths over 5mtrs CHAM-05 (20114) not included.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-01	20110	RGB Colour Controller

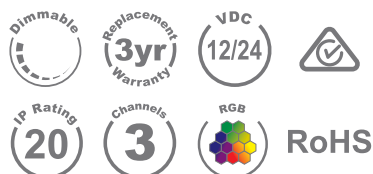

CHAM-03 RF RGBW Colour Controller

The CHAMELEON-03 is a standalone colour controller for use with 4 colour flexible LED strip lights or luminaires. Featuring a slim line hand held RF remote control with amazing, yet simple to use functions. The centre of the remote features a colour wheel in which a simple "Touch" with your finger allows you to adjust colours to suit your application. Functions like, CCT and RGB colour adjustments, fine tuning of colour, brightness and speed adjustments are all at your fingertips. 10 built-in colour modes are also included. For applications in which you may need multiple zones with individual control, the CHAMELEON-03 has a learn function which pairs the specific RF remote to the receiver avoiding cross communication between zones. A small yet powerful package. Let your imagination run wild.

Specification:

Type of controller:	RGBW 4ch Controller (selectable 3 or 4ch)
Method of control:	RF hand held remote
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour (receiver):	Black plastic colour housing
Housing colour (RF remote):	White plastic colour housing
Housing size (mm):	(L) 145mm x (W) 47mm x (H) 16mm - Controller (L) 120mm x (W) 47mm x (H) 18mm - Remote
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	4 x 5A
Output wattage (W):	12V DC - 60W per channel (x4). 24V DC - 120W per channel (x4).
Pre-set colour functions:	Yes (x10)*
Pause function:	Yes
Dimming function:	Yes
Speed function:	Yes
Learn Function:	Yes**
Expandable signal:	Yes***
Requires:	Constant Voltage 12-24V DC LED driver **** AAA-1.5V battery for RF remote


* Pre-defined colour modes.

** Learn function pairs the hand held remote to the receiver. Avoiding cross communication between multiple receivers.

*** Data repeater recommended for run lengths over 5mtrs CHAM-05 (20114) not included.

**** Constant Voltage LED driver required (Not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-03	20112	RF RGBW Colour Controller

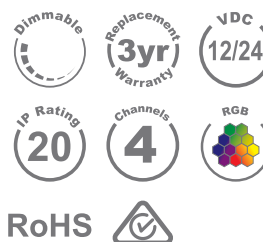



CHAM-04 RGBW Dimmable Interface Controller

The CHAMELEON-04 is an interface designed for 0-10V signals. Designed for use with Constant Voltage 12-24V DC lighting products the CHAMELEON-04 offers seamless integration between automation systems and luminaires. Accepts standard 0-10V signal generated from any automation system.

Featuring 4CH of dimming allowing control over RGB, RGBW or single colour LED lighting products. For manual dimming control for situations where an automation system is not used a resistive pot can be used. These low voltage 0-10V dimmers are designed to fit into standard HPM or Clipsal switch plates.

Specification:

Type of controller:	RGBW 4ch Controller
Method of control:	0-10V*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 169mm x (W) 58mm x (H) 28mm
Input voltage (VDC):	12-24V DC
Output current (A):	4x8A
Output wattage (W):	12VDC - 96W per channel (x4). 24V DC - 192W per channel (x4).
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver***

* Accepts signal generated from automation systems. For applications where 4CH manual adjustments are needed the use of a resistive pot such as the (20303) allows the user to manually adjust the colour. The number of pots required will depend on how many channels are required to dim.

** 4CH data repeater recommended for run lengths over 5mtrs CHAM-05 (20114) not included. 1CH data repeater recommended for single colour applications CHAM-25 (20134) not included.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

CHAM-04	Variant	Details
Interface	20113	4CH 0-10V Interface
Dimming Pod	20302	0-10V To suit HPM switch plate (Not for 240VAC usage)
Dimming Pod	20303	0-10V To suit Clipsal switch plate (Not for 240VAC usage)

Dimming pod only - switch plates not included.



Optional
1-10V Dimming-POD
(not included)



CHAM-05 RGBW Data Repeater

The CHAMELEON-05 is a 4 channel signal strength data repeater. The CHAMELEON-05 offers the ability to expand the signal strength generated by the master controller. In the situation where the load limit is exceeded or more than the limit set by the Master controller the CHAMELEON-05 is able to duplicate the signal without signal loss. This means whether using RGB, RGBW or single colour when colour changing or dimming the selected user colour will always remain the same. Particularly useful where a single master controller is used to control large areas or multiple zones.

Specification:

Type of controller:	4ch Data Repeater
Method of control:	PWM*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 168mm x (W) 58mm x (H) 28mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	4x8A
Output wattage (W):	12V DC - 96W per channel (x4). 24V DC - 192W per channel (x4).
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver***

* Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output.

** Multiple 4CH data repeaters can be used in a single circuit.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-05	20114	4CH Data Repeater





CHAM-06 Single Channel 0-10V LED Interface

The CHAMELEON-06 is an interface designed for 0-10V signals. Designed for use with Constant Voltage 12-24V DC lighting products the CHAMELEON-06 offers seamless integration between automation systems and luminaires. Accepts standard 0-10V signal generated from any automation system. Featuring 1CH of dimming allowing control over single colour LED lighting products. For manual dimming control for situations where an automation system is not used a resistive pot can be used. These low voltage 0-10V dimmers are designed to fit into standard HPM or Clipsal switch plates.

Specification:

Type of controller:	1ch Controller
Method of control:	0-10V*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 169mm x (W) 58mm x (H) 28mm
Input voltage (VDC):	12-24V DC
Output current (A):	1x8A
Output wattage (W):	12V DC - 96W 24V DC - 192W
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver***

* Accepts signal generated from automation systems. For applications where 1CH manual adjustments are needed the use of a resistive pot such as the (20303) allows the user to manually adjust the colour.

** 1CH data repeater recommended for single colour applications CHAM-25 (20134) not included.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

CHAM-06	Variant	Details
Interface	20115	1CH 0-10V Interface
Dimming Pod	20302	0-10V To suit HPM switch plate (Not for 240VAC usage)
Dimming Pod	20303	0-10V To suit Clipsal switch plate (Not for 240VAC usage)

Dimming pod only - switch plates not included.



Optional
1-10V Dimming-POD
(not included)



CHAM-07 RF Dimmer Controller

The CHAMELEON-07 is a creative yet simple to use RF dimmer. Designed for use with single colour LED lighting systems such as LED flexible strips and/or luminaires with low voltage dimming capabilities. Dimming is achieved via a simple to use RF remote control. Dimming can be realised by using either the touch sensitive dimming wheel or via the use of the dimming buttons. The CHAMELEON-07 has many useful functions which include the ability to control up to 4 individual zones off a single RF hand held remote and also to save up to 2 user defined pre-sets. Just imagine being able to dim your LED lighting via the comfort of your lounge room chair.

Specification:

Type of controller:	Single, 1ch dimmer Controller.
Method of control:	RF hand held remote
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour (receiver):	Black plastic colour housing
Housing colour (RF remote):	White plastic colour housing
Housing size (mm):	(L) 145mm x (W) 47mm x (H) 16mm
RF remote size (mm):	(L) 120mm x (W) 47mm x (H) 18mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	1 x 8A
Output wattage (W):	12V DC - 96W per channel (x1). 24V DC - 192W per channel (x1).
User set memory function:	Yes*
Multi zone control:	Yes**
Dimming function:	Yes
Learn function:	Yes***
Expandable signal:	Yes****
Requires:	Constant Voltage 12-24V DC LED driver***** AAA-1.5V battery for RF remote

* The user has the option to set 2 dimming levels/scenes. This applies per zone.


** Each RF hand held remote is able to control 4 zones. Please note that receivers cannot be ordered as a separate item.

*** Learn function pairs the hand held remote to the receiver. Avoiding cross communication between multiple receivers.

**** 1CH data repeater recommended for single colour applications CHAM-25 (20134) not included.

***** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-07	20116	RF single colour Controller

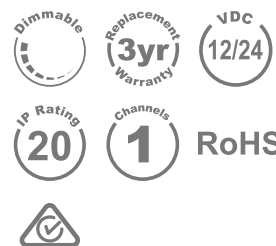



CHAM-11 Wall Mounted Dimmer

The CHAMELEON-11 is a simple yet very functional dimmer for use with LED strip lighting. A simple wall mounted dimmer switch gives you all the dimming power needed for most applications. Dimming can be performed via the easy turn dial located on the front fascia or by the provided IR remote control. The IR remote features many functions including 0-100% dimming, 4 factory dim pre-sets and 4 user defined pre-sets plus many more functions. A great addition to any LED lighting system to create your desired effect.

Specification:

Type of controller:	1ch dimmer
Method of control:	Wall control + IR hand held remote
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	White plastic fascia plate
Housing size (mm):	(L) 87mm x (W) 87mm x (H) 22mm
RF remote size (mm):	(L) 87mm x (W) 33mm x (H) 5mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	1 x 6A
Output wattage (W):	12V DC - 72W 24V DC - 144W
User set memory function:	Yes*
Pre-set memory functions:	Yes**
Away function:	Yes***
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver***

* The IR remote has 4 user allocated pre-set functions.


** The IR remote has 4 factory pre-set dimming levels (25-50-75-100%).

*** Once the power button is pressed on the remote, the occupant has 30 seconds to leave the room with the light ramping down to the off position after this time.

**** 1CH data repeater recommended for single colour applications CHAM-25 (20134) not included.

***** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-11	20120	Wall Control + IR Remote

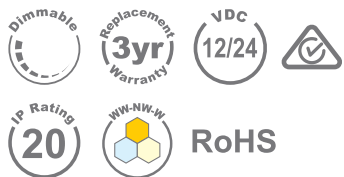

CHAM-15 350mA Data Repeater

The CHAMELEON-15 is a 3 channel signal strength data repeater for Constant Current fixtures. The CHAMELEON-15 offers the ability to expand the signal strength generated by the master controller. The CHAM-15 is able to accept a Constant Voltage PWM signal and produce a 350mA Constant Current output.

Specification:

Type of controller:	3ch Data Repeater
Method of control:	PWM*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour (receiver):	Black plastic colour housing
Housing size (mm):	(L) 169mm x (W) 58mm x (H) 28mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	3 x 350mA**
Output wattage (W):	12V DC - 4.2W per channel 24V DC - 8.4W per channel
Expandable signal:	Yes***
Requires:	Constant Voltage 12-24V DC LED driver****

* Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output 12-24V DC.

** Output current is 350mA. Fittings must be series wired.

*** Multiple CHAMELEON-15 Constant Current data repeaters can be used in a single circuit.

**** Constant Voltage LED driver required (not included) depending on requirements of light source and load (12V or 24V DC).

Item No.	Variant	Details
CHAM-15	20124	3CH Constant Voltage - 350mA Constant Current Data Repeater







CHAM-20 RGBW DMX-512 Interface

The CHAMELEON-20 is an interface designed to decode DMX-512 signals. Designed for use with Constant Voltage 12-24V DC lighting products the CHAMELEON-20 offers seamless integration between automation systems and/or lighting desk consoles and luminaires. Accepts standard DMX-512 signal generated from any automation system or lighting control console. Featuring up to 4CH of dimming, allowing control over RGB, RGBW or single colour LED lighting products.

Specification:

Type of interface:	RGBW 4ch Controller
Method of control:	DMX-512*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 168mm x (W) 58mm x (H) 28mm
Digital display:	Yes
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	4 x 8A
Output wattage (W):	12V DC - 96W per channel (x4) 24V DC - 192W per channel (x4)
Multi-channel operation:	Yes**
Expandable signal:	Yes***
Requires:	Constant Voltage 12-24V DC LED driver ****

* Accepts signal generated from automation systems via a DMX-512 gateway or lighting control console.

** 3-4CH selectable depending on use. RGB (3CH) or RGBW (4CH).

*** 4CH data repeater recommended for loads that exceed the CHAMELEON-20 limits. CHAM-05 (20114) not included.

**** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-20	20129	4CH DMX-512 Interface



CHAM-23 Single Channel DALI Interface

The CHAMELEON-23 is an interface designed to suit DALI dim applications. Intended for use with Constant Voltage 12-24V DC lighting products the CHAMELEON-23 offers seamless integration between automation systems. Accepts standard DALI signal generated from any automation system or simple dimming using the "Push Dim" function. Featuring 1CH of dimming, allowing control over single colour LED lighting products. The CHAMELEON-23 make integration a breeze with options for Auto addressing or manual addressing function.

Specification:

Type of controller:	1ch Dimmer
Method of control:	DALI or "Push Dim"
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 169mm x (W) 58mm x (H) 28mm
Digital display:	Yes
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	1 x 8A
Output wattage (W):	12V DC - 96W (x1) 24V DC - 192W (x1)
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver ***

* Accepts signal generated from automation systems via a DALI gateway or via momentary Switch when "Push dim" mode is selected (Type 6 device).

** 1CH data repeater recommended for loads that exceed the CHAMELEON-23 limits. CHAM-25 (20134) not included.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-23	20129	DALI 1CH Interface





CHAM-24 Touch Dimmer

The CHAMELEON-24 is a unique product in which a "Touch dimmer" is installed into a LED linear profile. The "Touch dimmer" has been specifically designed to suit the Domus range of mounting profiles. Once integrated into the LED Aluminium profile the only way you know something is installed is by the "Blue" glow emitted by the integral LED. The purpose of the "Blue" indicator light is to guide the owner to the point in which to turn the light on is by a simple soft touch to the diffuser. Once the owner has touched the diffuser the LED strip lighting will slowly ramp up to 100%, unless a dimming level has been pre-set. In this case the LED will return to its last dimming level. A simple extended touch on the diffuser at the "Blue" light point will start to ramp up or down until the finger has been removed from the diffuser. The "Touch dimmer" makes a very useful addition for kitchen under cupboard lighting, furniture and even office lighting.

Specification:

Type of controller:	1ch dimming Controller
Method of control:	Touch dimmer*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Not applicable
Housing size (mm):	Not applicable
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	1 x 6A
Output wattage (W):	12V DC - 72W (x1) 24V DC - 144W (x1)
Expandable signal:	Not applicable
Requires:	Constant Voltage 12-24V DC LED driver**
Compatible mounting profiles:	OPTI-SM, BLOC-20 and CURVE-20***

* Touch dimmer is only suited for particular Domus LED mounting profiles. The touch dimmer must be pre-assembled by Domus in the selected profile at the point of ordering.

** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

*** LED mounting profile needed (not included) compatible LED mounting profiles include the OPTI-SM, BLOC-20 and CURVE-20.

Item No.	Variant	Details
CHAM-24	20133	1CH Touch Dimmer



CHAM-25 1 Channel Power Data Repeater

The CHAMELEON-25 is a 1 channel high power data repeater. The CHAMELEON-25 offers the ability to expand the signal strength generated by the master controller for dimming circuits. In situations where the load limit is exceeded or more than the limit set by the Master controller the CHAMELEON-25 is able to duplicate the signal without signal loss. This means whether dimming via RF, 0-10V, DALI or DMX you can be assured that the dimming signal will always be stable thus avoiding the appearance of dim light over larger areas. Particularly useful where a single master controller is used to control large areas or multiple zones.

Specification:

Type of controller:	1ch High Power Data Repeater
Method of control:	PWM*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black metal colour housing
Housing size (mm):	(L) 150mm x (W) 54mm x (H) 31mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	1x24A
Output wattage (W):	12V DC - 288W (x1) 24V DC - 576W (x1)
Expandable signal:	Yes**
Protection:	Yes, replaceable external 25A blade fuse***
Requires:	Constant Voltage 12-24V DC LED driver***

* Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output.

** Multiple 1CH data repeaters can be used in a single circuit.

*** Standard replacement blade type fuse. Available from any electronics supplier.

**** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-25	20134	1CH Power Data Repeater





CHAM-29 1 Channel Slim DALI Interface

The CHAMELEON-29 is a super slim interface designed to suit DALI dim applications. Intended for use with Constant Voltage 12-24V DC lighting products the CHAMELEON-29 offers seamless integration between automation systems. Accepts standard DALI signal generated from any automation system. Featuring 1CH of dimming, allowing control over single colour LED lighting products. The CHAMELEON-29 make integration a breeze with auto addressing function. Applications for the CHAMELEON-29 due to its super slim size is integration into the larger LED mounting profiles within the Domus range.

Specification:

Type of controller:	1ch dimming Controller
Method of control:	DALI*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Translucent blue colour housing
Housing size (mm):	(L) 159mm x (W) 27mm x (H) 19mm
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	1 x 3A
Output wattage (W):	12V DC - 36W (x1) 24V DC - 72W (x1)
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver ***
Applications:	As part of integration into the larger Domus LED mounting profiles.

* Accepts signal generated from automation systems via a DALI (type 6 device) gateway or via other DALI systems. (Not recommended for "Push Dim" applications).

** 1CH data repeater recommended for loads that exceed the CHAMELEON-29 limits. CHAM-30 (20139) not included.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-29	20138	1CH SLIM-DALI Interface



CHAM-30 1 Channel Data Repeater

The CHAMELEON-30 is a 1 channel data repeater. The CHAMELEON-30 offers the ability to expand the signal strength generated by the master controller for dimming circuits. In situations where the load limit is exceeded, or more that the limit set by the Master controller, the CHAMELEON-30 is able to duplicate the signal without signal loss. The slim data repeater was specifically designed to work in conjunction with the SLIM-DALI interface device. Particularly useful for use in some of the larger Aluminium LED mounting profiles offered in the Domus range.

Specification:

Type of controller:	1ch dimming Controller
Method of control:	PWM*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Translucent blue colour housing
Housing size (mm):	(L) 159mm x (W) 27mm x (H) 19mm
Input voltage (VDC):	12-24 VDC
Output voltage (VDC):	12-24 VDC
Output current (A):	1 x 8A
Output wattage (W):	12V DC - 96W (x1) 24V DC - 192W (x1)
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver ***

* Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output (Best suited for use with the CHAM-29 SLIM-DALI interface).

** Multiple, 1CH data repeaters can be used in a single circuit.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-30	20139	1CH SLIM Data Repeater





CHAM-40 RGBW DALI Interface

The CHAMELEON-40 is an interface designed to suit DALI dim applications. Intended for use with Constant Voltage 12-24V DC lighting products the CHAMELEON-40 offers seamless integration between automation systems. Accepts standard DALI signal generated from any automation system. Featuring 1-4CH of dimming, allowing control over single colour, RGB or RGBW LED lighting products. The CHAMELEON-40 make integration a breeze with options for Auto addressing or manual addressing function.

Specification:

Type of controller:	1-4ch Dimming Controller (selectable)
Method of control:	DALI signal*
Method of dimming:	PWM (Pulse Width Modulation)
Housing colour:	Black plastic colour housing
Housing size (mm):	(L) 169mm x (W) 58mm x (H) 28mm
Digital display:	Yes
Input voltage (VDC):	12-24V DC
Output voltage (VDC):	12-24V DC
Output current (A):	4x8A
Output wattage (W):	12V DC - 96W per channel (x4) 24V DC - 192W per channel (x4)
Expandable signal:	Yes**
Requires:	Constant Voltage 12-24V DC LED driver ***

* Accepts signal generated from automation systems via a DALI gateway (Type 0 device).

** 4CH data repeater recommended for loads that exceed the CHAMELEON-40 limits. CHAM-05 (20114) not included.

*** Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).

Item No.	Variant	Details
CHAM-40	20149	4CH DALI Interface



RoHS



Mondo Round Series

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.



Mondo 300 & 400 Rnd



Item No.	Variant	Wattage	CCT	IP Rating	Lumen Output		
	Opal				Warm White 3000K	Neutral White 4000K	White 5700K
Mondo-Rnd-300	20873	20W	TRIO	44	1700lm	1750lm	1800lm
Mondo-Rnd-400	20879	30W	TRIO	44	2400lm	2450lm	2500lm



LED Oysters




Solar Round Series


- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.




Solar-200-Rnd



Solar-300-Rnd



Solar-400-Rnd



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output		
	Wht	Blk				Warm White 3000K	Neutral White 4000K	White 5700K
Solar-200-RND	20938	20939	15W	54	TRIO	1350lm	1400lm	1450lm
Solar-300-RND	20940	20941	25W	54	TRIO	2250lm	2300lm	2350lm
Solar-400-RND	20942	20943	35W	54	TRIO	3000lm	3050lm	3100lm



LED Oysters



Solar Square Series



- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.



Solar-300-Sqr



Solar-400-Sqr



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output		
	Blk	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Solar-300-SQR	20946	20944	25W	54	TRIO	2250lm	2300lm	2350lm
Solar-400-SQR	20947	20945	35W	54	TRIO	3000lm	3050lm	3100lm




Easy Series


- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.




Easy-250



Easy-300



Easy-400

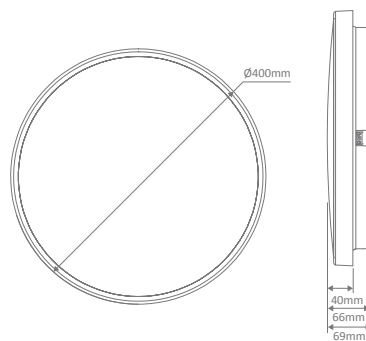

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output		
	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Easy-250	20954	10W	54	TRIO	930lm	965lm	1000lm
Easy-300	20955	18W	54	TRIO	1500lm	1600lm	1820lm
Easy-400	20956	25W	54	TRIO	2220lm	2435lm	2650lm





Sunset Series



- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.




Sunset Round



Sunset Square

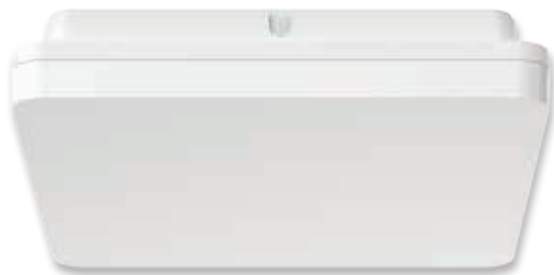

SUNSET-250-RND




SUNSET-250-SQR




SUNSET-300-RND



SUNSET-300-SQR



SUNSET-400-RND



SUNSET-400-SQR

Item No.	Variant	Wattage	CCT	IP Rating	Lumen Output		
	Satin Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Sunset-250-RND	20880	15W	TRIO	54	1300lm	1400lm	1320lm
Sunset-300-RND	20881	25W	TRIO	54	2160lm	2410lm	2200lm
Sunset-400-RND	20882	35W	TRIO	54	3020lm	3420lm	3240lm
Sunset-250-SQR	20886	15W	TRIO	54	1430lm	1520lm	1460lm
Sunset-300-SQR	20887	25W	TRIO	54	2380lm	2620lm	2490lm
Sunset-400-SQR	20888	35W	TRIO	54	3300lm	3570lm	3380lm



LED Panel



Panel Series

- White trim frame.
- DALI dimming optional extra upon request.



PANEL-303



PANEL-306




PANEL-312



PANEL-606



LED Panel

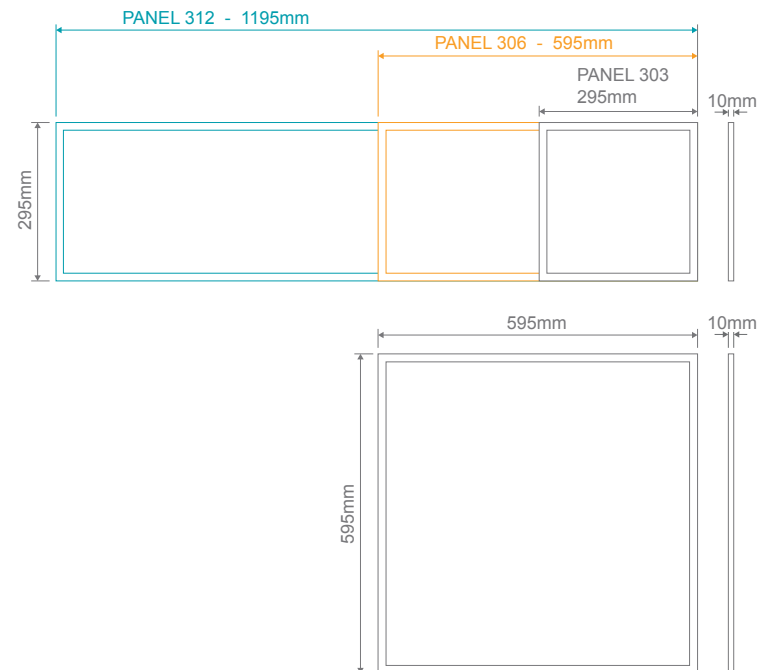

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output		
	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Panel 303	17605	12W	44	TRIO	900lm	1000lm	1100lm
Panel 306	17607	25W	44	TRIO	2200lm	2300lm	2350lm
Panel 312	17609	35W	44	TRIO	3200lm	3300lm	3400lm
Panel 606	17611	35W	44	TRIO	3200lm	3300lm	3400lm



LED Panel Recessed Plaster Frames



- Satin White metal frame.
- To suit Plaster ceilings.

Trim 303



Trim 312



Trim 306



Trim 606



Item No.	Variant	Frame Dimensions	Cutout
Trim 303	19324	(L)330x(W)330x(H)41mm	(L)310x(W)310mm
Trim 306	19325	(L)630x(W)330x(H)41mm	(L)610x(W)310mm
Trim 312	19326	(L)1230x(W)330x(H)41mm	(L)1210x(W)310mm
Trim 606	19327	(L)630x(W)630x(H)41mm	(L)610x(W)610mm



LED Panel Surface Mount Frames



- Anodised Aluminium or Satin White frame.
- To suit surface mounted applications.

SM-Kit-303



SM-Kit-312



SM-Kit-306



SM-Kit-606



Item No.	Variant		Frame Dimensions	Inside Opening
	Slr	Wht		
SM-Kit-303	19328	19332	(L)312x(W)312x(H)60mm	(L)268x(W)268mm
SM-Kit-306	19329	19333	(L)612x(W)312x(H)60mm	(L)568x(W)268mm
SM-Kit-312	19330	19334	(L)1212x(W)312x(H)60mm	(L)1168x(W)268mm
SM-Kit-606	19331	19335	(L)612x(W)612x(H)60mm	(L)568x(W)568mm




LED Panel Surface Mount Frames Installation Guide


1. Fix the frame onto the ceiling with screws



2. Pull down the side frame



3. Push the panel into the frame, connect the driver



4. Install the side frame



5. Turn the power on to finish the installation.



Please note all lighting installations must be made by a licensed electrician.

LED Panel Wire Suspension Kit



Item No.	Variant	Length
SUSP-KIT-2M	22041	2M Wire Suspension Kit (each)



PANEL-303




LED Directional Lights

Pistol Series

- COB LED Chip.
- Adjustable and Directional.
- Cast Aluminium frame, powder coated.
- Fully dimmable with suitable dimmers.



Pistol-15

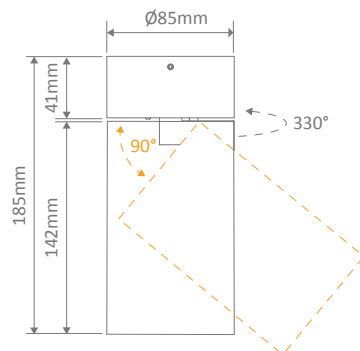

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Pistol-15	20632	20635	15W	20	3000K	1230lm
	20633	20636			4000K	1445lm
	20634	20637			5000K	1660lm




LED Directional Lights

Pistol Series

- COB LED Chip.
- Adjustable and Directional.
- Cast Aluminium frame, powder coated.
- Fully dimmable with suitable dimmers.



Pistol-25

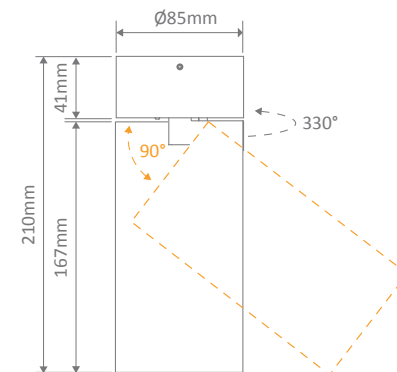

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Pistol-25	20638	20641	25W	20	3000K	2040lm
	20639	20642			4000K	2395lm
	20640	20643			5000K	2750lm



Jet Series

- COB LED Chip.
- Cast Aluminium and metal frame.
- Adjustable and Directional.
- Fully dimmable with suitable dimmers.



JET-1



Silver



JET-4-SQ




JET-4-Bar



JET-3-Bar



JET-2-Bar

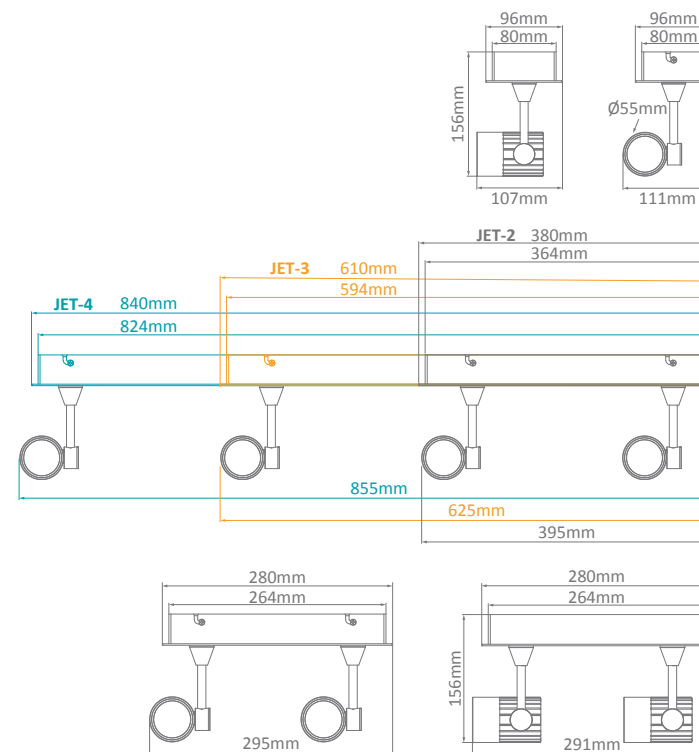

Item No.	Variant	Wattage	Colour	CCT	IP Rating	Lumen Output
Jet 1	20646	10W	White	3000K	20	800lm
	20647		White	5000K		850lm
	20648		Silver	3000K		800lm
	20649		Silver	5000K		850lm
Jet 2 Bar	20650	2x10W	White	3000K	20	2x800lm
	20651		White	5000K		2x850lm
	20652		Silver	3000K		2x800lm
	20653		Silver	5000K		2x850lm
Jet 3 Bar	20654	3x10W	White	3000K	20	3x800lm
	20655		White	5000K		3x850lm
	20656		Silver	3000K		3x800lm
	20657		Silver	5000K		3x850lm
Jet 4 Bar	20658	4x10W	White	3000K	20	4x800lm
	20659		White	5000K		4x850lm
	20660		Silver	3000K		4x800lm
	20661		Silver	5000K		4x850lm
Jet 4 Sq	20662	4x10W	White	3000K	20	4x800lm
	20663		White	5000K		4x850lm
	20664		Silver	3000K		4x800lm
	20665		Silver	5000K		4x850lm






LED Track Lights

Thor Series

- To suit 3-circuit 240V Track.
- Fully dimmable with suitable dimmers.
- Black model comes standard with black baffle and 36 degree lens.
- White model comes standard with white baffle and 36 degree lens.
- Optional interchangeable baffle colours and lens options available.

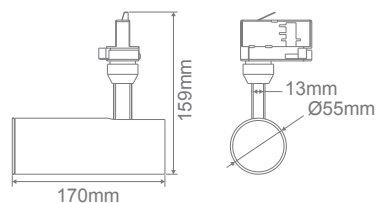

Optional baffle colours



Gold Baffle



Silver Baffle

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Thor-15-3-36D	22250	22255	15W	20	3000K	1068lm
	22251	22256			4000K	1147lm
	22252	22257			5000K	1121lm
Thor-BAF	Gld	Slv				
	22265	22266				

Sold separately

Item No.	Variant	Degree
Thor-LEN	22260	15°
	22261	24°


Sold separately



LED Track Lights

Mars Series

- To suit 3-circuit 240V Track.
- Fully dimmable with suitable dimmers.
- Optional interchangeable honeycomb reflector and lens options available.

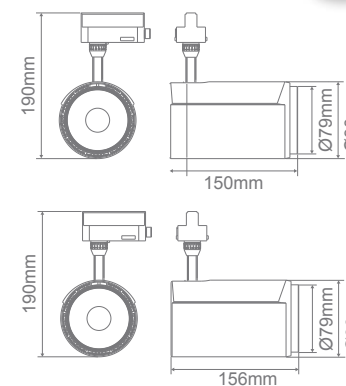

Honeycomb

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Mars-25	22270	22273	25W	20	3000K	2180lm
	22271	22274			4000K	2420lm
Mars-35	22280	22284	35W	20	3000K	3020lm
	22281	22285			4000K	3330lm
Mars-BAF	Honeycomb					
	22278					

Sold separately



Item No.	Variant	Degree
Mars-LEN	22276	12°
	22277	24°

Sold separately



Trak-3 Series

- Three Circuit 240V Track.
- Available in 1m or 2m lengths.

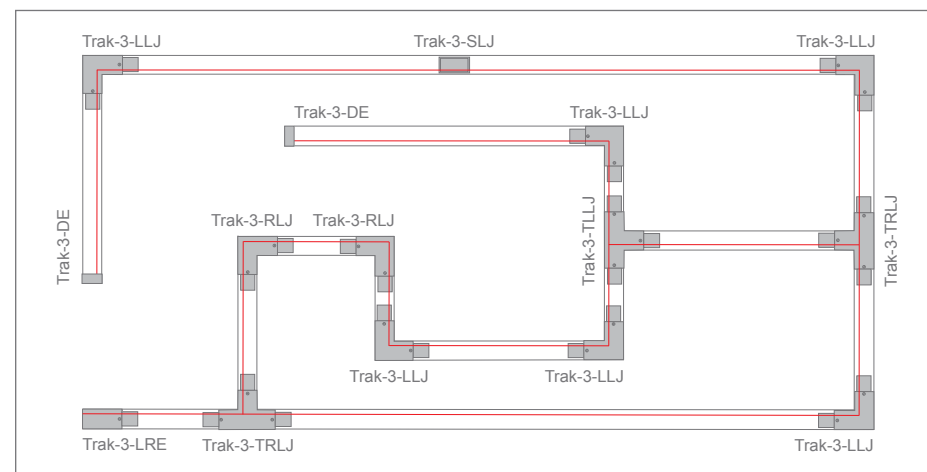

(LRE) Live Right End

(LLE) Live Left End

(DE) Dead End

(SLJ) Straight Live Joiner

(LLJ) L Shape Left Live Joiner

(RLJ) L Shape Right Live Joiner

(SDJ) Straight Dead Joiner

(TLLJ) T Shape Left Live Joiner

(TRLJ) T Shape Right Live Joiner


(ADA) Adaptor

(CFLJ) Centre Feed Live Joiner

Item No.	Variant		Voltage	IP Rating	Length
	Blk	Wht			
Trak-3-S1M	22152	22153	240V	20	1M
Trak-3-S2M	22150	22151	240V	20	2M



Trak-3 Accessories

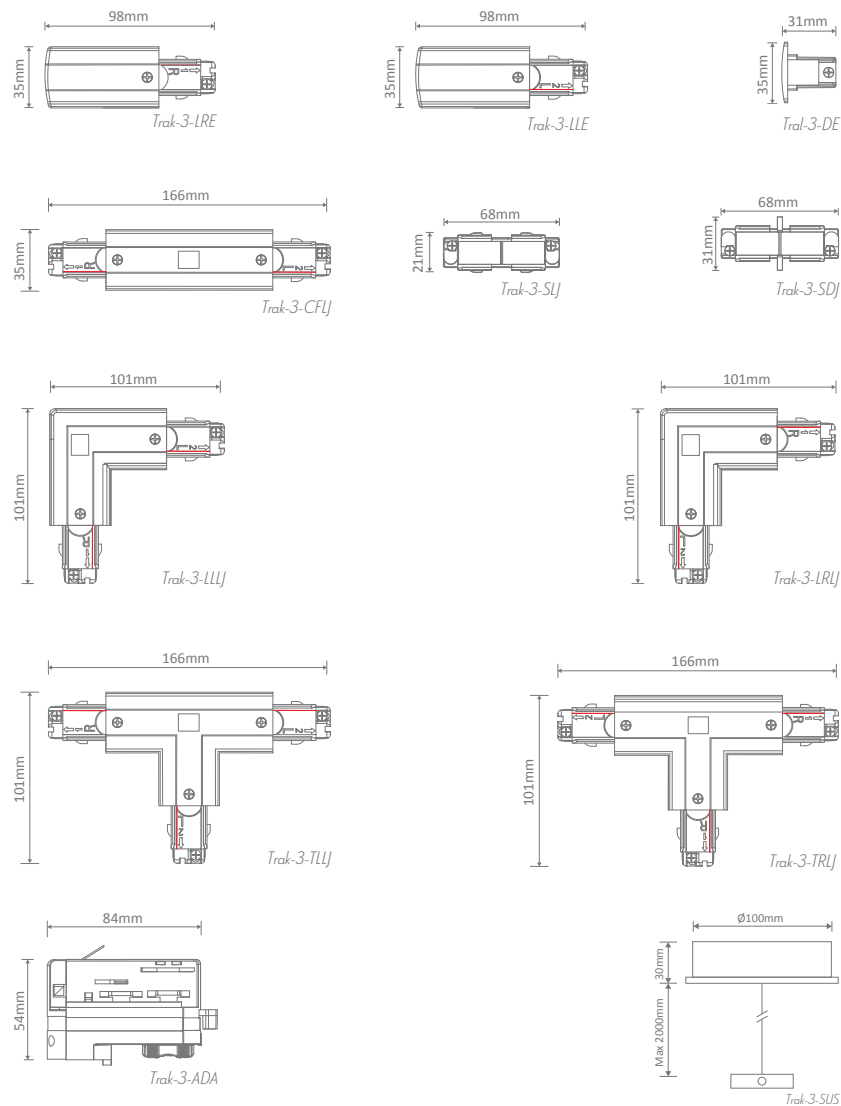

Item No.	Variant	
	Black	White
Trak-3-LRE	22156	22157
Trak-3-LLE	22158	22159
Trak-3-DE	22160	22161
Trak-3-SLJ	22162	22163
Trak-3-LLJ	22164	22165

Item No.	Variant	
	Black	White
Trak-3-LRJ	22166	22167
Trak-3-SDJ	22170	22171
Trak-3-TLLJ	22176	22177
Trak-3-TRLJ	22178	22179

Item No.	Variant	
	Black	White
Trak-3-ROD	22182	22183
Trak-3-SUS	22184	22185
Trak-3-ADA	22186	22187
Trak-3-CFLJ	22188	22189





Puffin Series

- Timber frame in natural stained and painted colours.
- Adjustable length cord suspension.






Puffin-30



Puffin-40



Puffin-60

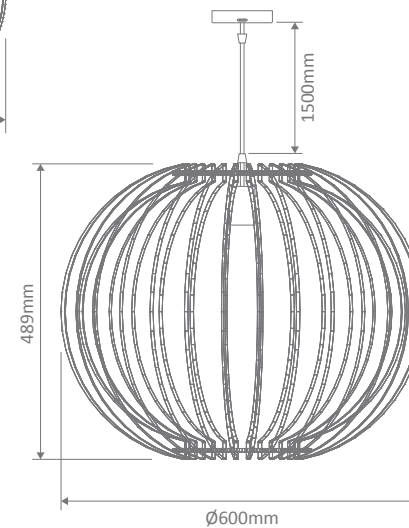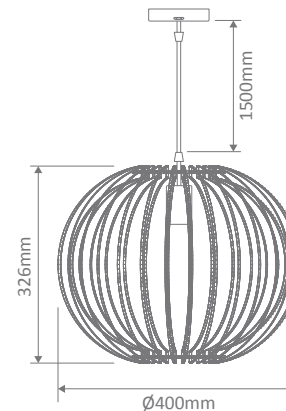

Item No.	Variant			Wattage	IP Rating	Requires
	Blk	Brwn	Wht			
Puffin-30	31015	31016	31017	60W	20	Requires: 1xE27 Globe (Not Included)
Puffin-40	31020	31021	31022	60W	20	Requires: 1xE27 Globe (Not Included)
Puffin-60	31025	31026	31027	60W	20	Requires: 1xE27 Globe (Not Included)





Robin Series

- Timber frame in natural stained and painted colours.
- Adjustable length cord suspension.






Robin-40



Robin-50



Robin-60

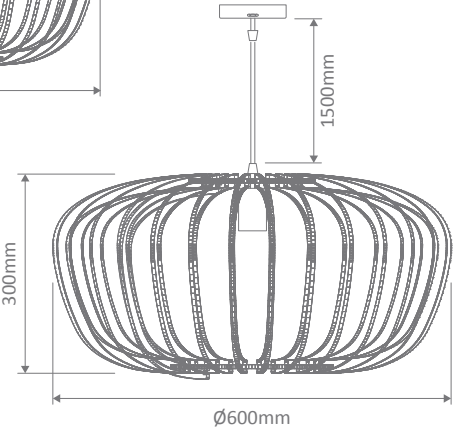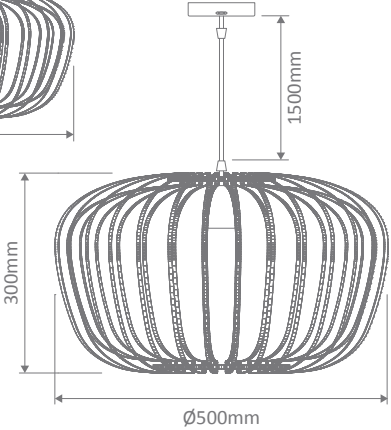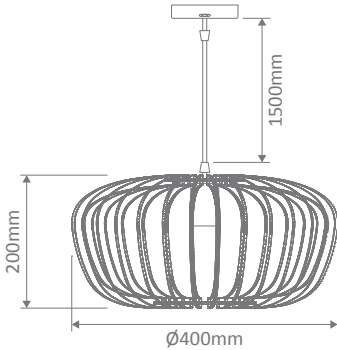


Item No.	Variant			Wattage	IP Rating	Requires
	Blk	Brwn	Wht			
Robin-40	31000	31001	31002	60W	20	Requires: 1xE27 Globe (Not Included)
Robin-50	31005	31006	31007	60W	20	Requires: 1xE27 Globe (Not Included)
Robin-60	31010	31011	31012	60W	20	Requires: 1xE27 Globe (Not Included)



Pendants

Alice Series

- Glass shade, antique brass glass holder.
- Adjustable length cord suspension.

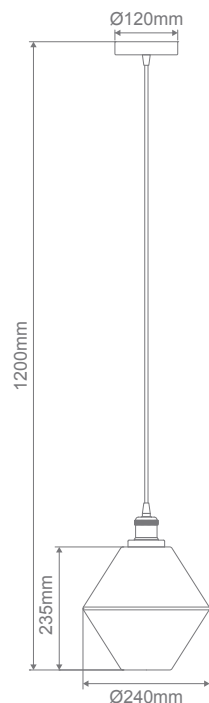


Item No.	Variant			Wattage	Requires
	Amber	Clear	Grey		
Alice	31300	31301	31302	60W	1xE27 Globe (Not Included)



Pendants

Eva Series

- Glass shade, antique brass glass holder.
- Adjustable length cord suspension.

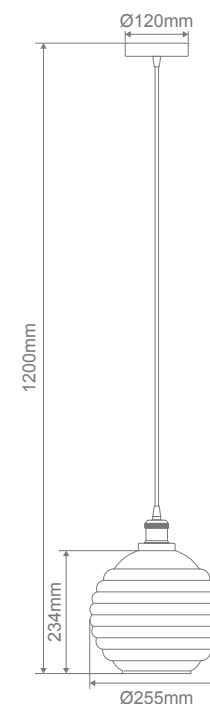

Item No.	Variant		Wattage	Requires
	Grey	Opal		
Eva	31305	31306	60W	1xE27 Globe (Not Included)



Pendants

Maya Series

- Glass shade, painted black metalware.
- Adjustable length chain suspension.




Grey



Clear



Opal

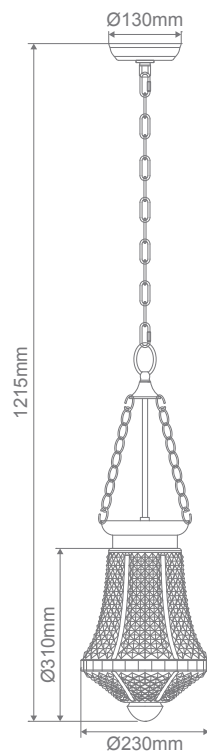

Item No.	Variant			Wattage	Requires
	Clear	Grey	Opal		
Maya	31330	31331	31332	60W	1xE27 Globe (Not Included)



Pendants

Chelsea Series

- Glass shade, painted black metalware.
- Adjustable length chain suspension.




Grey



Clear



Opal

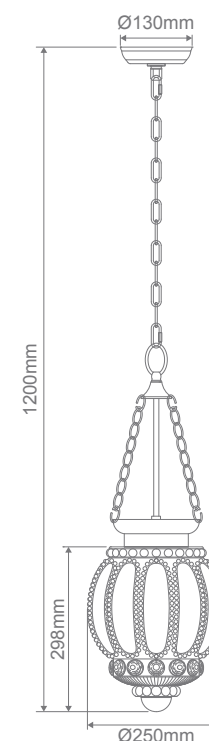


Item No.	Variant			Wattage	Requires
	Clear	Grey	Opal		
Chelsea	31340	31341	31342	60W	1xE27 Globe (Not Included)



Pendants

Diana

- Glass shade, painted black metalware.
- Adjustable length chain suspension.

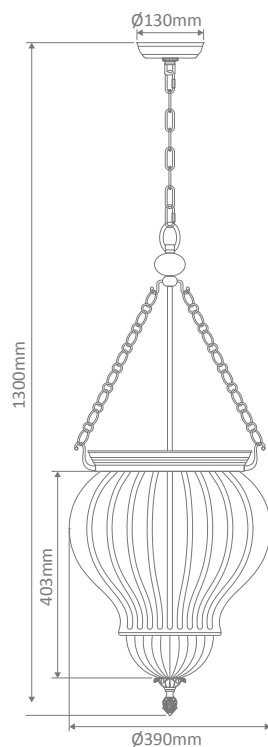


Item No.	Variant	Wattage	Colour	Requires
Diana	Clear	60W	Clear	3xE14 Globes (Not Included)



Pendants

Erin


- Glass shade, painted black metalware.
- Adjustable length chain suspension.

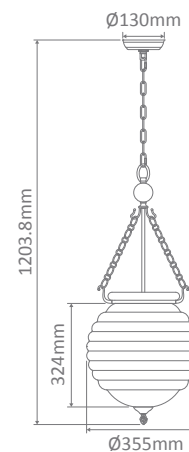

Item No.	Variant	Wattage	Requires
Erin	Clear	60W	3xE14 Globes (Not Included)
Alexa	Clear	60W	3xE14 Globes (Not Included)

Alexa

- Glass shade, painted black metalware.
- Adjustable length chain suspension.

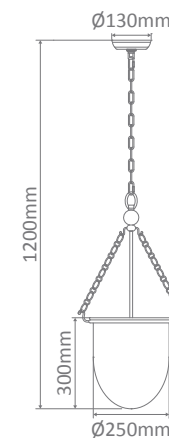



Pendants

Jazz Series



- Glass shade, polished chrome holder.
- Adjustable length cord suspension.
- Matching small and large shade option.



Item No.	Variant		Wattage	Requires
	Chrome	Copper		
Jazz-200	31355	31356	60W	1xE27 Globe (Not Included)
Jazz-350	31359	31360	60W	1xE27 Globe (Not Included)




JAZZ-200



Pendants

Evelyn Series

- Glass shade, antique brass glass holder.
- Adjustable length cord suspension.

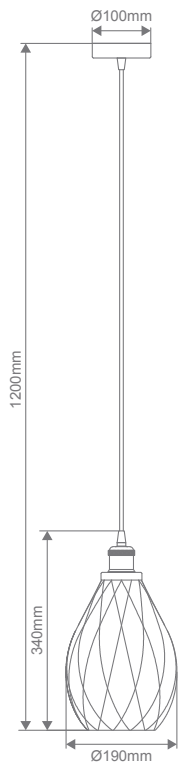

Item No.	Variant			Wattage	Requires
	Amber	Clear	Grey		
Evelyn	31350	31351	31352	60W	1xE27 Globe (Not Included)



EVELYN-GREY




Pendants

Star Series


- Adjustable cord length suspension.
- COB LED Chip.




Star-10-180

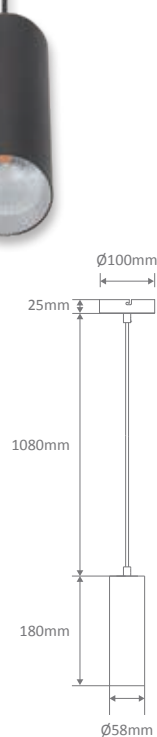

Star-5-300

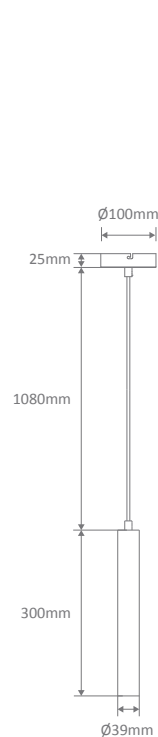

Star-5-500

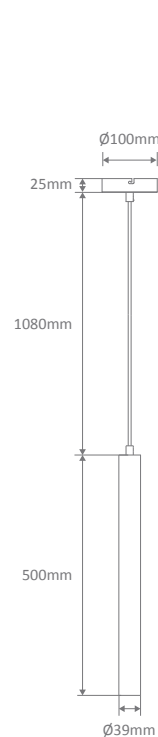

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Black	White				
Star-10-180	21065	21068	10W	20	3000K	1000lm
	21066	21069			4000K	1050lm
	21067	21070			5000K	1100lm
Star-5-300	21051	21054	5W	20	3000K	500lm
	21052	21055			4000K	530lm
	21053	21056			5000K	550lm
Star-5-500	21058	21061	5W	20	3000K	500lm
	21059	21062			4000K	530lm
	21060	21063			5000K	550lm




STAR-5-300-BLK



Luna Series



- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.

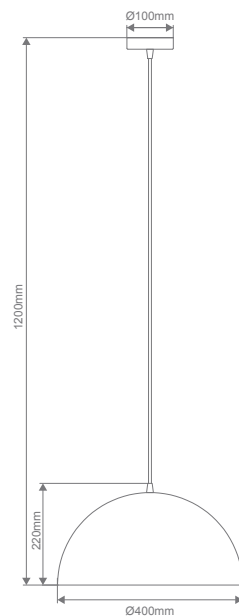

Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Luna-400	31363	31364	31365	31366	31367	60W	1xE27 Globe (Not Included)



LUNA-400-BLK



Pendants

Zoey Series



- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.



Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Zoey-260	31374	31375	31376	31377	31378	60W	1xE27 Globe (Not Included)
Zoey-400	31379	31380	31381	31382	31383	60W	1xE27 Globe (Not Included)




Pendants

Laya Series



- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.

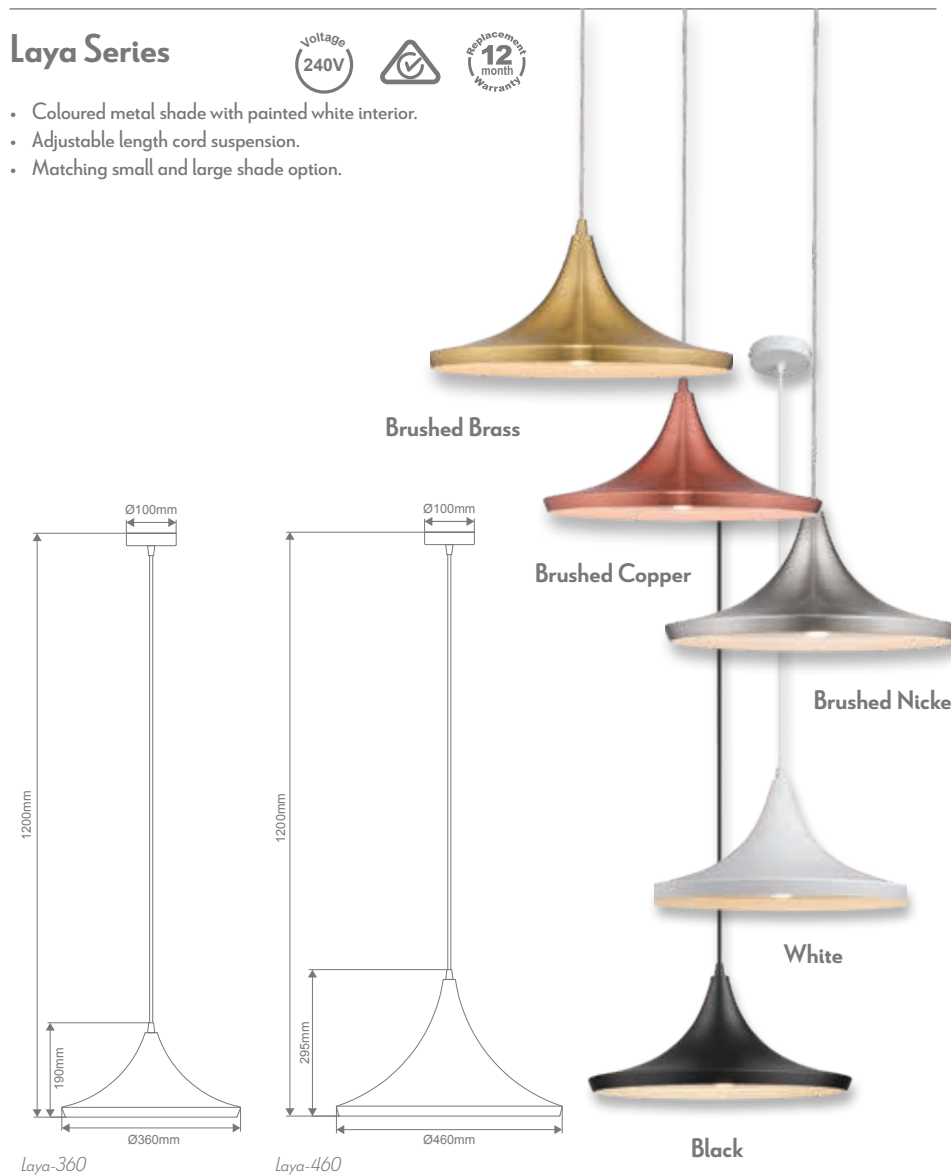

Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Laya-360	31400	31401	31402	31403	31404	60W	1xE27 Globe (Not Included)
Laya-460	31405	31406	31407	31408	31409	60W	1xE27 Globe (Not Included)



Ruby Series



- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.



Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Ruby-185	31392	31393	31394	31395	31396	60W	1xE27 Globe (Not Included)



RUBY-185-BLK



Jade-220 Series



- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.



Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Jade-220	31412	31413	31414	31415	31416	60W	1xE27 Globe (Not Included)




JADE-220-BLK



Jade-240 Series



- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.

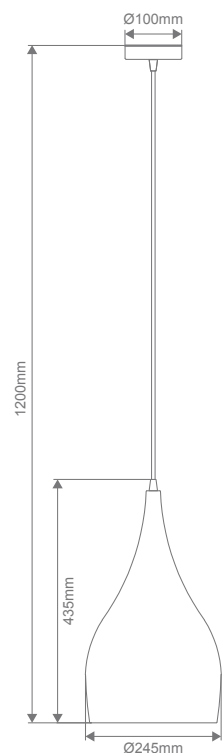

Brushed Copper

Brushed Brass

Brushed Nickel

White

Black



Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Jade-240	31417	31418	31419	31420	31421	60W	1xE27 Globe (Not Included)



Pendants


Melody Series

Voltage
240V



12
month
warranty

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.

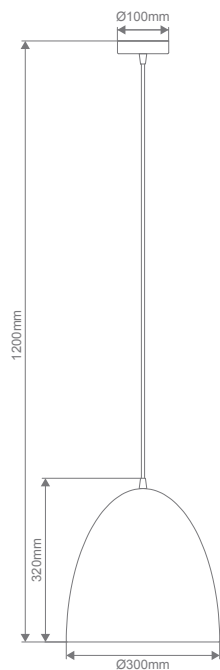

Brushed Copper

Brushed Brass

Brushed Nickel

White

Black

Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Melody-300	31440	31441	31442	31443	31444	60W	1xE27 Globe (Not Included)



MELODY-300-BLK



Pendants

Nova Series



- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.



Item No.	Variant					Wattage	Requires
	Brushed Brass	Brushed Copper	Brushed Nickel	Black	White		
Nova-420	31430	31431	31432	31433	31434	60W	1xE27 Globe (Not Included)



NOVA-420-WHT



LED Crystal Pendants

Jupiter Series


- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.






Jupiter-30-1



Jupiter-46-1



Jupiter-46-2

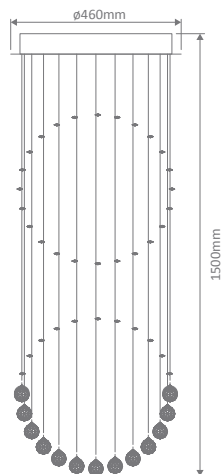

Item No.	Variant	Wattage
Jupiter 30-1	35000	4x3W G9
Jupiter 46-1	35001	5x6W GU10
Jupiter 46-2	35002	5x6W GU10



JUPITER-46-1



LED Crystal Pendants

Boomerang Series

- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.

Voltage
240V



12
month
warranty




Boomerang-40



Boomerang-50



Boomerang-66

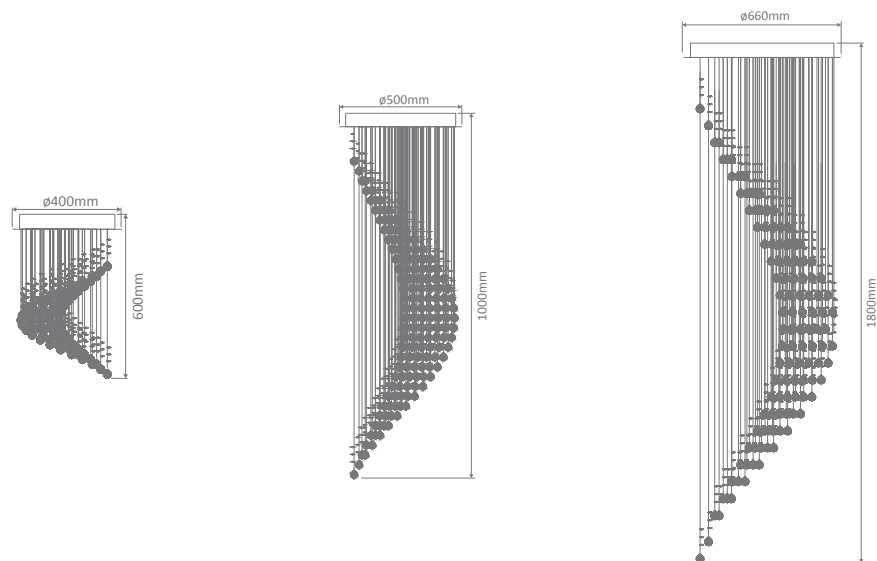

Item No.	Variant	Wattage
Boomerang 40	35020	4x6W GU10
Boomerang 50	35021	6x6W GU10
Boomerang 66	35022	8x6W GU10



LED Crystal Pendants

Everest Series

- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.


Voltage
240V




12
month
warranty



Everest-40

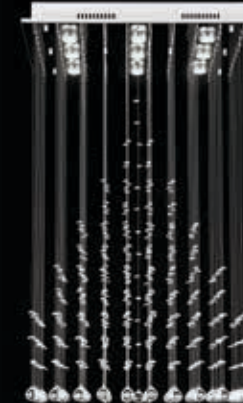

Everest-60

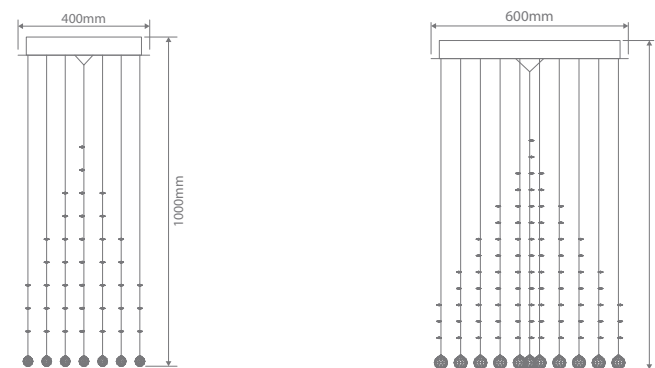

Item No.	Variant	Wattage
Everest 40	35005	5x6W GU10
Everest 60	35006	9x6W GU10



LED Crystal Pendants

Raindrop Series

- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.

Voltage
240V





12
month
warranty



Raindrop-66



Raindrop-86

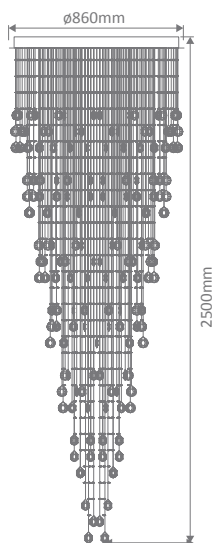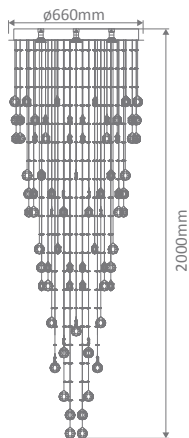

Item No.	Variant	Wattage
Raindrop 66	35009	9x6W GU10
Raindrop 86	35010	12x6W GU10



LED Crystal Pendants

Snowdrop Series

- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.

Voltage
240V





12
month
warranty



Snowdrop-66



Snowdrop-86

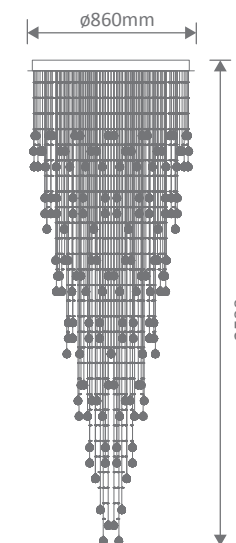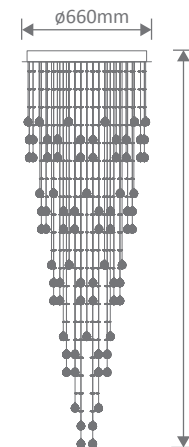

Item No.	Variant	Wattage
Snowdrop 66	35017	9x6W GU10
Snowdrop 86	35018	12x6W GU10



LED Crystal Pendants

Arctic Series


- Polished Chrome metalware, K9 Crystal.
- Led 5000K boards included.



Arctic-50



Arctic-80

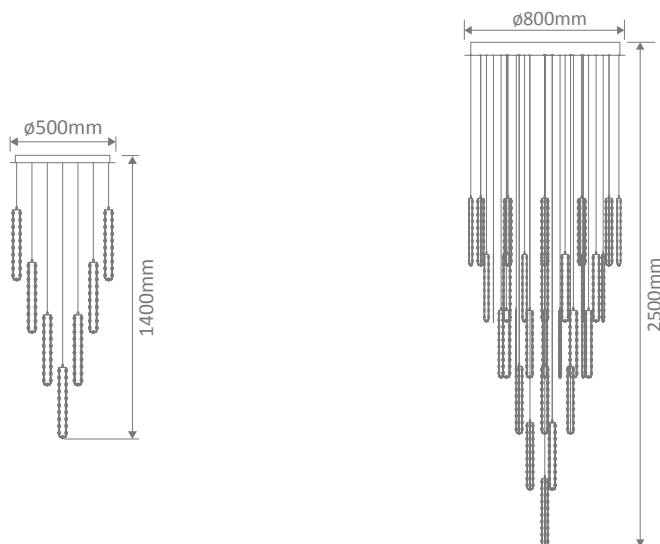

Item No.	Variant	Wattage
Arctic-50	35050	19x4W LED Boards built into crystal drops
Arctic-80	35051	40x4W LED Boards built into crystal drops



LED Crystal Pendants

Starlight Series

- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.



Starlight-C20



Starlight-C30



Item No.	Variant	Wattage
Starlight C20	35030	3x3W G9
Starlight C30	35031	4x3W G9



LED Crystal Pendants

Starlight Series



- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.
- Surface mount flush ceiling light.
- Matching ceiling light and pendant options.



Starlight-C60



Starlight-C80

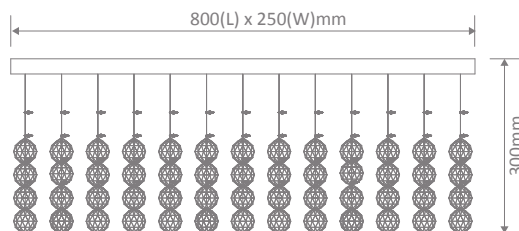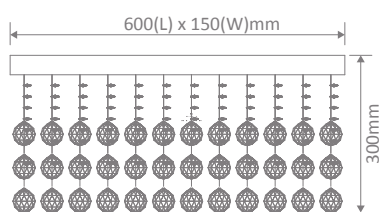

Item No.	Variant	Wattage
Starlight C60	35032	4x3W G9
Starlight C80	35033	8x3W G9



LED Crystal Pendants

Starlight Series



- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.
- Adjustable length wire suspension.
- Matching ceiling light and pendant options.



Starlight-P60



Starlight-P80

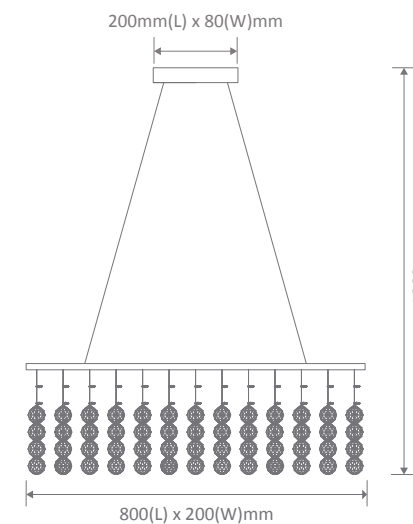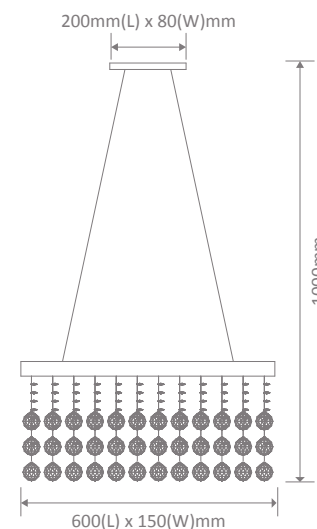

Item No.	Variant	Wattage
Starlight P60	35034	4x3W G9
Starlight P80	35035	8x3W G9



LED Crystal Pendants

Rainbow Series


- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.
- Adjustable length wire suspension.



Rainbow-60



Rainbow-90

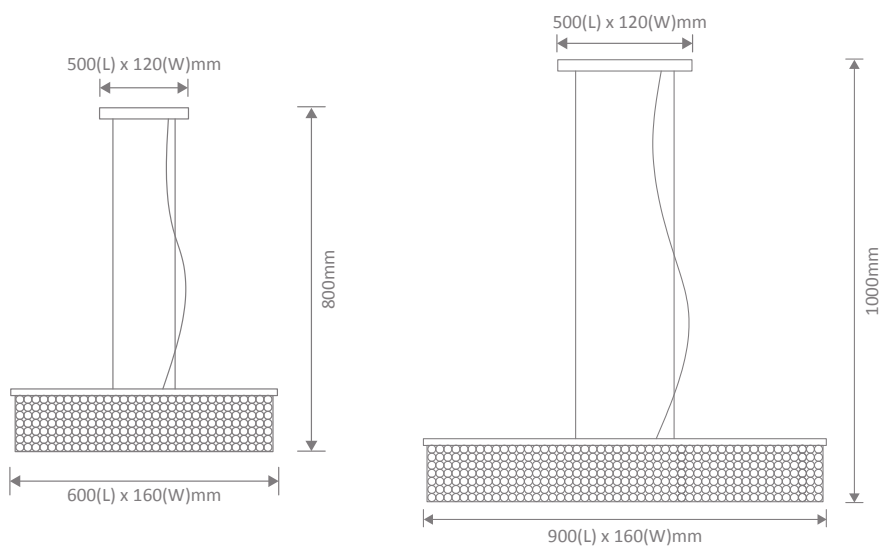


Item No.	Variant	Wattage
Rainbow 60	35048	6x3W G9
Rainbow 90	35049	9x3W G9




LED Crystal Pendants

Venus Series


- Polished Chrome metalware, K9 Crystal.
- Led 5000K lamps included.
- Adjustable length chain suspension.



Venus-40

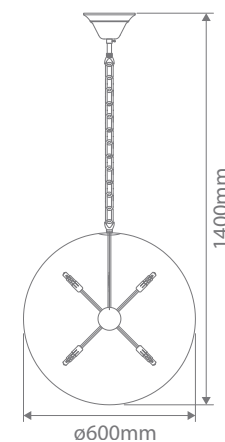

Venus-60

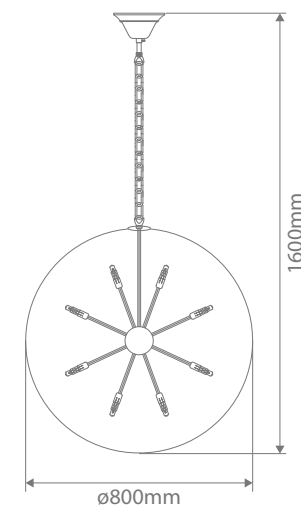

Venus-80

Item No.	Variant	Wattage
Venus 40	35040	5x3W G9
Venus 60	35041	8x3W G9
Venus 80	35042	14x3W G9



LED Linear Pendants



LINE-46-WHT-4000K

Line-46 Series




- Profile includes Driver and Osram LED Boards.
- Aluminium profile and PMMA opal diffuser.
- Adjustable length wire suspension.
- Made to order in Australia from local and imported components.



Black



White

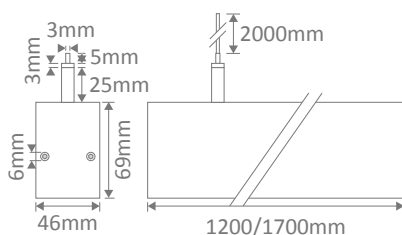

LED Linear Pendants



BLOC-42-BLK

Bloc-42 Series




- Profile includes Driver and Osram LED Boards.
- Aluminium profile and PMMA opal diffuser.
- Adjustable length wire suspension.
- Made to order in Australia from local and imported components.



Aluminium



White

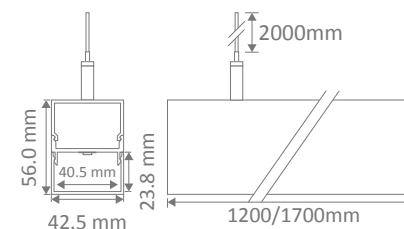

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Line-46-1.2	23020	23000	23010	20.8W	20	3000K	2960lm
	23022	23002	23012			4000K	3120lm
	23024	23004	23014			6500K	3120lm
Line-46-1.7	23050	23030	23040	31.2W	20	3000K	4440lm
	23052	23032	23042			4000K	4680lm
	23054	23034	23044			6500K	4680lm

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Bloc-42-1.2	23060	23055	23070	20.8W	20	3000K	2960lm
	23062	23057	23072			4000K	3120lm
	23064	23059	23074			6500K	3120lm
Bloc-42-1.7	23090	23080	23100	31.2W	20	3000K	4440lm
	23092	23082	23102			4000K	4680lm
	23094	23084	23104			6500K	4680lm



LED Linear Pendants

Pipe-60 Series




- Profile includes remote mount Driver and Plex-19.2 strip.
- Aluminium profile and PMMA opal diffuser.
- Complete with 2M adjustable length wire suspension.
- Made to order in Australia from local and imported components.



Black



White



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Pipe-60-1.2M	23115	23110	23120	21W	20	3000K	1658lm
	23116	23111	23121			4000K	1797lm
	23117	23112	23122			5000K	
Pipe-60-1.7M	23130	23125	23135	31W	20	3000K	2349lm
	23131	23126	23136			4000K	2546lm
	23132	23127	23137			5000K	

2 Metres Suspension kit included





PIPE-60-BLK-3000K




LED Packaged Profiles

Max-50-DN

- Profile includes integral drivers, Osram LED boards and suspension kits.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.

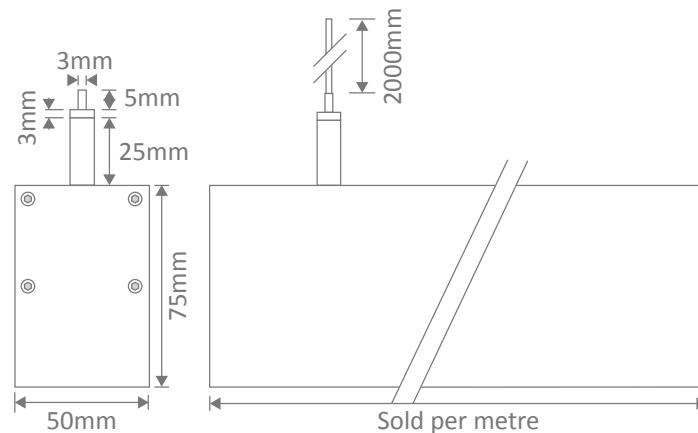

Aluminium



White



Back

Specification:

Installation:	Suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 50mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

** 1-10V and DALI dimming optional and available upon request.



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-50-DN	22328	22324	22332	17.3W/Per Metre	20	3000K	2466lm
	22329	22325	22333			4000K	2600lm
	22330	22326	22334			5000K	2600lm
	22331	22327	22335			6500K	2600lm



LED Packaged Profiles

Max-50-Rec

- Profile includes integral Drivers and Osram LED Boards.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.

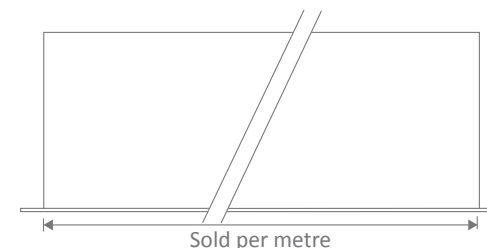

Aluminium



White



Back View

Specification:

Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 70mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

** 1-10V and DALI dimming optional and available upon request.

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-50-Rec	22304	22300	22308	17.3W/Per Metre	20	3000K	2466lm
	22305	22301	22309			4000K	2600lm
	22306	22302	22310			5000K	2600lm
	22307	22303	22311			6500K	2600lm



LED Packaged Profiles

Max-50-SM

- Profile includes integral Drivers and Osram LED Boards.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.




LED Packaged Profiles

Specification:

Installation:	Surface mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 50mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

** 1-10V and DALI dimming optional and available upon request.

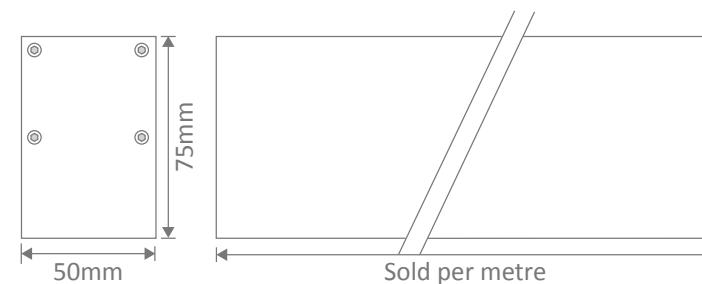

Aluminium



White



Back View

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-50-SM	22316	22312	22320	17.3W/Per Metre	20	3000K	2466lm
	22317	22313	22321			4000K	2600lm
	22318	22314	22322			5000K	2600lm
	22319	22315	22323			6500K	2600lm



LED Packaged Profiles

Max-50-UD



- Profile emits light upwards and downwards.
- Profile includes integral drivers, Osram LED boards and suspension kits.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.



LED Packaged Profiles

Specification:

Installation:

Suspension mounted

Material:

Extruded Aluminium 6063

Finish:

Natural clear anodised, black or white powder coated

Diffuser:

Flat high output Opal/Frost colour

Length:

Sold per metre*

Size:

Profile (W) 50mm, (H) 90mm

Input:

240V

LED Type:

SMD

CRI:

>80

Beam Angle:

120°

Dimmable:


No**

Lifespan (hrs):

50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)


** 1-10V and DALI dimming optional and available upon request.

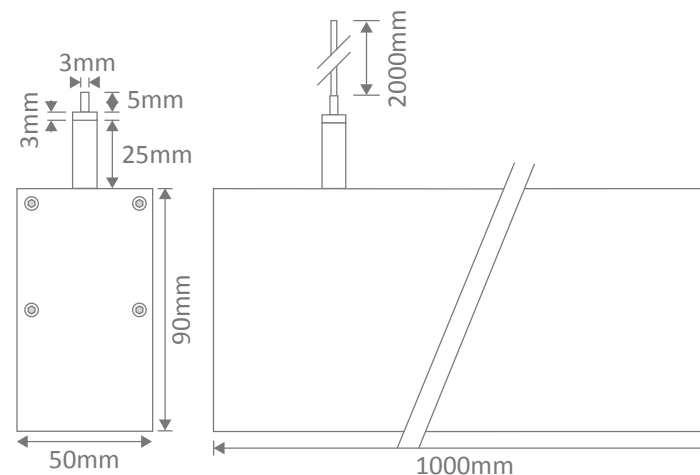

Aluminium



White



Back View


Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-50-UD	22340	22336	22344	34.67W/Per Metre	20	3000K	2x2466lm
	22341	22337	22345			4000K	2x2600lm
	22342	22338	22346			5000K	2x2600lm
	22343	22339	22347			6500K	2x2600lm



LED Packaged Profiles

Max-75-DN

- Profile includes integral drivers, Osram LED boards and suspension kits.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.

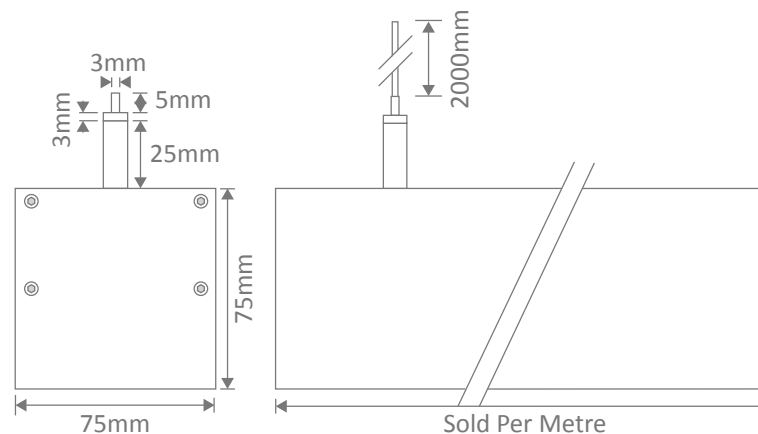

Aluminium



White



Back View

Specification:

Installation:	Suspension mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 75mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

** 1-10V and DALI dimming optional and available upon request.

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-75-DN	22376	22372	22380	17.3W/Per Metre	20	3000K	2466lm
	22377	22373	22381			4000K	2600lm
	22378	22374	22382			5000K	2600lm
	22379	22375	22383			6500K	2600lm



LED Packaged Profiles

Max-75-Rec

- Profile includes integral Drivers and Osram LED Boards.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.




LED Packaged Profiles

Specification:

Installation:	Recess mounted
Material:	Extruded Aluminium 6063
Finish:	Natural clear anodised, black or white powder coated
Diffuser:	Flat high output Opal/Frost colour
Length:	Sold per metre*
Size:	Profile (W) 95mm, (H) 75mm
Input:	240V
LED Type:	SMD
CRI:	>80
Beam Angle:	120°
Dimmable:	No**
Lifespan (hrs):	50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

** 1-10V and DALI dimming optional and available upon request.

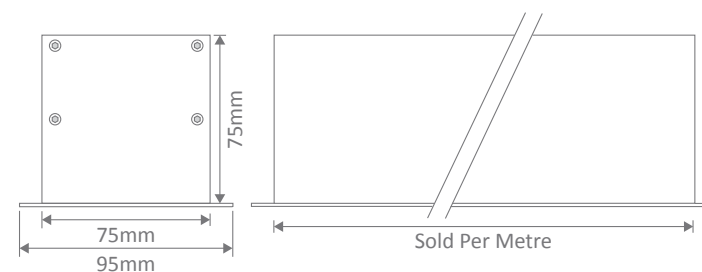

Aluminium



White



Back View


Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-75-Rec	22352	22348	22356	17.3W/Per Metre	20	3000K	2466lm
	22353	22349	22357			4000K	2600lm
	22354	22350	22358			5000K	2600lm
	22355	22351	22359			6500K	2600lm



LED Packaged Profiles

Max-75-SM

- Profile includes integral Drivers and Osram LED Boards.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.

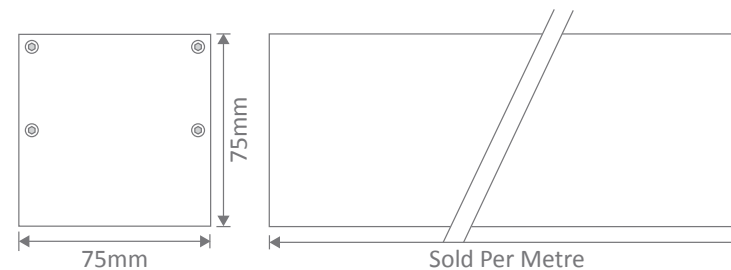

Aluminium



White



Back View

Specification:

Installation:

Material:

Finish:

Diffuser:

Length:

Size:

Input:

LED Type:

CRI:

Beam Angle:

Dimmable:

Lifespan (hrs):

Surface mounted

Extruded Aluminium 6063

Natural clear anodised, black or white powder coated

Flat high output Opal/Frost colour

Sold per metre*

Profile (W) 75mm, (H) 75mm

240V

SMD

>80

120°

No**

50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

** 1-10V and DALI dimming optional and available upon request.

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-75-SM	22364	22360	22368	17.3W/Per Metre	20	3000K	2466lm
	22365	22361	22369			4000K	2600lm
	22366	22362	22370			5000K	2600lm
	22367	22363	22371			6500K	2600lm



LED Packaged Profiles

Max-75-UD



- Profile emits light upwards and downwards.
- Profile includes integral drivers, Osram LED boards and suspension kits.
- DALI dimming and emergency optional extra upon request.
- Made in Australia from local and imported components.
- Custom lengths all made to order.



Specification:

Installation:

Material:

Finish:

Diffuser:

Length:

Size:

Input:

LED Type:

CRI:

Beam Angle:

Dimmable:

Lifespan (hrs):

Suspension mounted

Extruded Aluminium 6063

Natural clear anodised, black or white powder coated

Flat high output Opal/Frost colour

Sold per metre*

Profile (W) 75mm, (H) 95mm

240V

SMD

>80


120°

No**


50,000hrs

* Profile sold per metre. Can be cut to suit any length. (Available in lengths greater than 5M with joiners.)

** 1-10V and DALI dimming optional and available upon request.

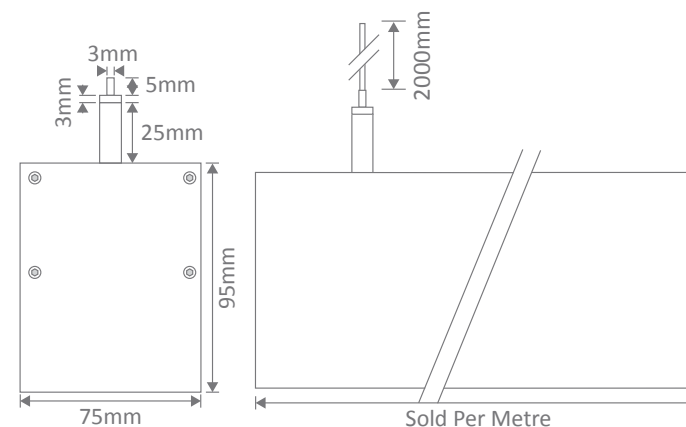

Aluminium



White



Back View

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Max-75-UD	22388	22384	22392	34.67W/Per Metre	20	3000K	2x2466lm
	22389	22385	22393			4000K	2x2600lm
	22390	22386	22394			5000K	2x2600lm
	22391	22387	22395			6500K	2x2600lm




LUMALINE-2-900


Lumaline-2 Series



- Profile includes Driver and Plex-19.2 strip.
- Light emits upwards and downwards.
- Aluminium profile and PMMA opal diffuser.
- Made to order in Australia from local and imported components.

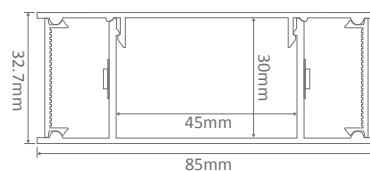

Item No.	Variant	Wattage	Colour	IP Rating	CCT	Lumen Output
Lumaline-2-600	23600	2x11.5W	Aluminium	20	3000K	2x830lm
	23602				4000K	2x899lm
	23604				5000K	2x899lm
	23610		Black		3000K	2x830lm
	23612				4000K	2x899lm
	23614				5000K	2x899lm
	23620		White		3000K	2x830lm
	23622				4000K	2x899lm
	23624				5000K	2x899lm
Lumaline-2-900	23650	2x17.5W	Aluminium	20	3000K	2x1244lm
	23652				4000K	2x1348lm
	23654				5000K	2x1348lm
	23660		Black		3000K	2x1244lm
	23662				4000K	2x1348lm
	23664				5000K	2x1348lm
	23670		White		3000K	2x1244lm
	23672				4000K	2x1348lm
	23674				5000K	2x1348lm




SHADOWLINE-900

Shadowline Series



- Profile includes Driver and Plex-14.4 strip.
- Aluminium profile and PMMA opal diffuser.
- Made to order in Australia from local and imported components.

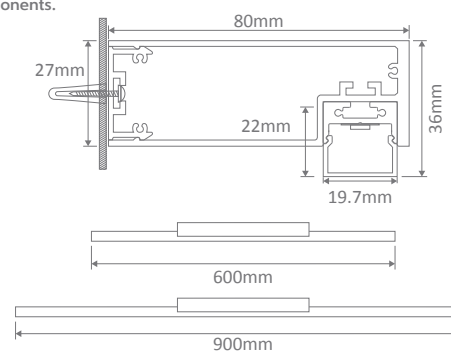

Item No.	Variant	Wattage	Colour	IP Rating	CCT	Lumen Output
Shadowline-600	23500	9W	Aluminium	20	3000K	660lm
	23502				4000K	708lm
	23504				5000K	708lm
	23510		Black		3000K	660lm
	23512				4000K	708lm
	23514				5000K	708lm
	23520		White		3000K	660lm
	23522				4000K	708lm
	23524				5000K	708lm
Shadowline-900	23550	13W	Aluminium	20	3000K	990lm
	23552				4000K	1062lm
	23554				5000K	1062lm
	23560		Black		3000K	990lm
	23562				4000K	1062lm
	23564				5000K	1062lm
	23570		White		3000K	990lm
	23572				4000K	1062lm
	23574				5000K	1062lm




Mirror Series


- Aluminium profile and PMMA opal diffuser.
- Adjustable Polished chrome knuckles.



Mirror-10



Mirror-15

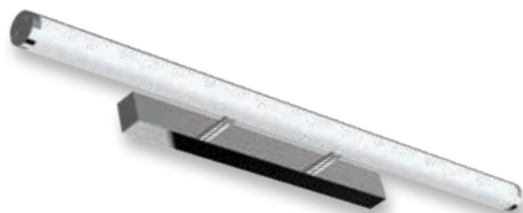

MIRROR-10-SCH



MIRROR-10-CHR



MIRROR-10-WHT





MIRROR-15-BLK



MIRROR-15-CHR



MIRROR-15-WHT

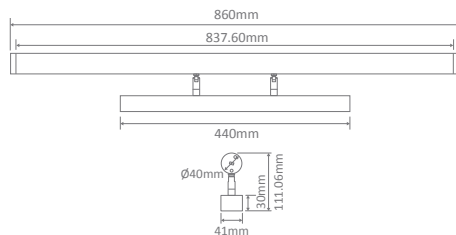

Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output		
	Blk	Chr	Schr	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Mirror-10	12001	12003	12005	12007	10W	40	TRIO	1040lm	1110lm	1180lm
Mirror-15	12011	12013	12015	12017	15W	40	TRIO	1590lm	1718lm	1845lm



MIRROR-20-CHR



LED Vanity Lights



Mirror Series

- Aluminium profile and PMMA opal diffuser.
- Adjustable Polished chrome knuckles.



Mirror-20




MIRROR-20-BLK



MIRROR-20-SCH



MIRROR-20-WHT

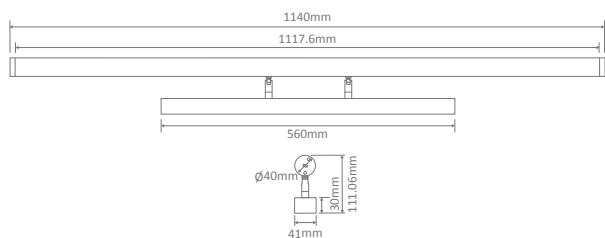

Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output		
	Blk	Chr	Schr	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Mirror-20	12021	12023	12025	12027	20W	40	TRIO	2100lm	2200lm	2300lm



Hollywood Lights


HL-804 Series



White



Black




Chrome



Satin Chrome


Item No.	Variant				Requires
	Blk	Chr	Schr	Wht	
HL-804-3LT	16309	16311	16314	16315	3x B15 Globes (Not included)
HL-804-4LT	16318	16320	16323	16324	4x B15 Globes (Not included)
HL-804-5LT	16327	16329	16332	16333	5x B15 Globes (Not included)
HL-804-6LT	16336	16338	16341	16342	6x B15 Globes (Not included)
HL-804-7LT	16345	16347	16350	16351	7x B15 Globes (Not included)
HL-804-8LT	16354	16356	16359	16360	8x B15 Globes (Not included)

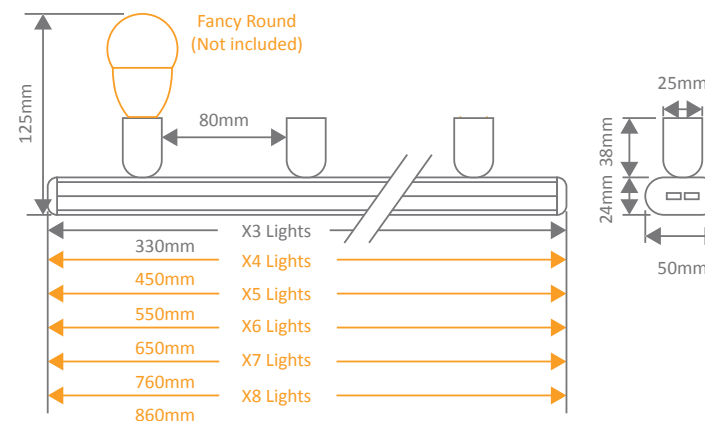

**BF-2012**


Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2012	11034	Raw	1xG9 (Not Included)

**BF-2013**


Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2013	11074	Raw	1xG9 (Not Included)

**BF-2014**



Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2014	11035	Raw	2xG9 (Not Included)

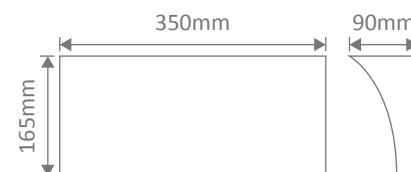**BF-2018**

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.


Item No.	Variant	Colour	Lamp
BF-2018	11075	Raw	1xG9 (Not Included)

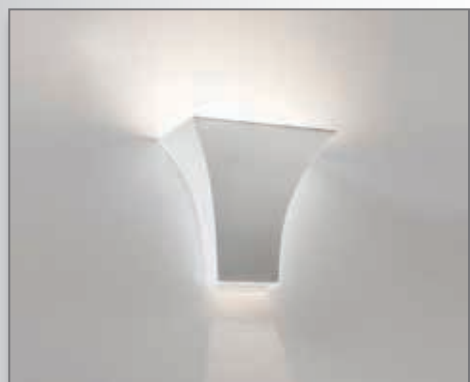

**BF-2019**

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2019	11076	Raw	2xG9 (Not Included)

**BF-2020**


Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2020	11077	Raw	2xG9 (Not Included)

**BF-2185**



Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2185	11036	Raw	1xG9 (Not Included)

**BF-2350**

Raw modern round indirect wall light. Creates a soft and subtle feature for feature wall lighting. Ceramic areas can be painted with any water based paint.


Item No.	Variant	Colour	Lamp
BF-2350	11080	Raw	1xG9 (Not Included)

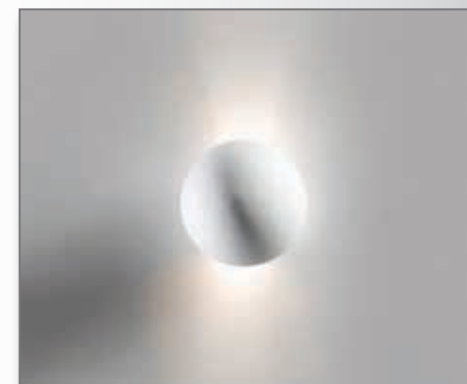

**BF-2440**


Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2440	11081	Raw	1xE27 (Not Included)

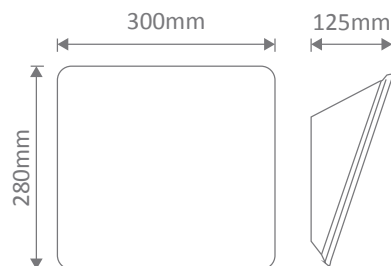**BF-2601A**


Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2601A	11082	Raw	1xG9 (Not Included)

**BF-2601B**


Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2601B	11083	Raw	1xG9 (Not Included)

**BF-2607A**

Raw ceramic uplight wall light. Light emits Upwards only. Ceramic areas can be painted with any water based paint

Item No.	Variant	Colour	Lamp
BF-2607A	11084	Raw	1xG9 (Not Included)





Ceramic Wall Lights

BF-2607B

Raw ceramic wall light. Light emits upwards and downwards through an opening in the bottom of the fitting. Ceramic areas can be painted with any water based paint


Item No.	Variant	Colour	Lamp
BF-2607B	11085	Raw	1xG9 (Not Included)



BF-2608A

Raw ceramic uplight wall light. Light emits Upwards only. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-2608A	11090	Raw	2xG9 (Not Included)




Ceramic Wall Lights

BF-7577

Raw ceramic wall light. Ceramic areas can be painted with any water based paint


Item No.	Variant	Colour	Lamp
BF-7577	11042	Raw	1xE27 (Not Included)



BF-7578

Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-7578	11044	Raw	1xE27 (Not Included)

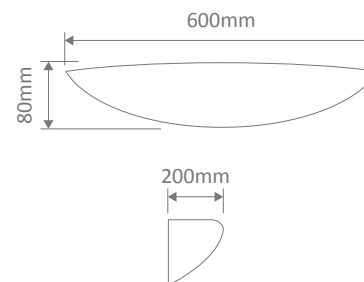




BF-2608B

Raw ceramic wall light. Light emits upwards and downwards through an opening in the bottom of the fitting. Ceramic areas can be painted with any water based paint.


Item No.	Variant	Colour	Lamp
BF-2608B	11091	Raw	2xG9 (Not Included)



BF-7310

Raw ceramic wall light. Ceramic areas can be painted with any water based paint. Made in Italy.

Item No.	Variant	Colour	Lamp
BF-7310	11040	Raw	1xE27 (Not Included)



BF-7310

**BF-7603**


Raw ceramic wall light complete with frosted glass.
Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-7603	11049	Raw	1xE27 (Not Included)

**BF-7908**


Raw ceramic wall light complete with frosted glass.
Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-7908	11051	Raw	1xE27 (Not Included)

**BF-7949**


Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint. Corner mounted installations only.

Item No.	Variant	Colour	Lamp
BF-7949	11101	Raw	1xE27 (Not Included)

**BF-8042**

Raw ceramic wall light complete with frosted glass.
Ceramic areas can be painted with any water based paint.


Item No.	Variant	Colour	Lamp
BF-8042	11102	Raw	1xE27 (Not Included)



**BF-8235**


Raw ceramic wall light complete with open slot.
Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-8235	11115	Raw	1xE27 (Not Included)

**BF-8258**


Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-8258	11116	Raw	1xE27 (Not Included)

**BF-8284**


Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-8284	11121	Raw	2xG9 (Not Included)

**BF-8286**

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.


Item No.	Variant	Colour	Lamp
BF-8286	11122	Raw	1xE27 (Not Included)



**BF-8259**


Raw ceramic wall light complete with frosted glass.
Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-8259	11118	Raw	1xE27 (Not Included)

**BF-8276**


Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-8276	11120	Raw	2xG9 (Not Included)

**BF-8411**



Raw ceramic wall light complete with frosted glass.
Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-8411	11131	Raw	1xE27 (Not Included)

**BF-8418**

Raw ceramic wall light. Light emits both ways. Ceramic areas can be painted with any water based paint.

Item No.	Variant	Colour	Lamp
BF-8418	11037	Raw	2xG9 (Not Included)

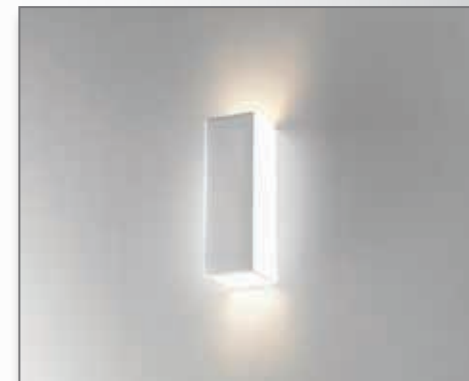



Bolt Series



- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.



Bolt 60**Bolt 120**

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Bolt 60	66001	10W/21W	44	4000K	900lm/1850lm
	66002			5000K	850lm/1750lm
Bolt 120	66004	21W/42W	44	4000K	1850lm/3800lm
	66005			5000K	1750lm/3500lm

Hydro Series



- Constructed from high impact resistant polycarbonate.
- Inbuilt LED driver included.
- Replaceable LED module.

Hydro 60**Hydro 120**

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Hydro 60	66010	20W	65	4000K	2000lm
	66011			5000K	2000lm
Hydro 120	66015	40W	65	4000K	4000lm
	66016			5000K	4000lm



Profan Series




Profan 2

IP Rating
20Replacement
Warranty
(3yr)

Specification Features

Input Voltage: 220-240V
 Ball Bearing Motor: 40W
 IP rating (IP): IP20
 Heat Lamp: 2x275W Infrared
 LED Type: 1x12W LED Panel, (Switchable)
 3000K - 800lm
 5000K - 900lm

Motor: 35W Ball Bearing
 Air Flow: 400m³/h
 Motor Speed: 1100rpm
 Fan Wheel: Ø160mm
 Noise: 48dB
 Switch: 3 Gang (Included)
 Warranty: 3 Year Replacement
 Cutout: 430x250mm
 Ceiling Depth: 240mm
 Grill Size: 480x290x21mm
 Duct size: Dia. 120mm
 Colours: White
 Accessories: 3 Gang Wall Switch
 150mm x 3M Aluminium Duct
 120mm to 150mm Adaptor
 Wall Extraction Plate Fascia
 2 x 160mm Pipe Clamp
 1 x 130mm Pipe Clamp

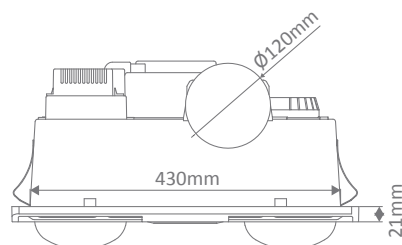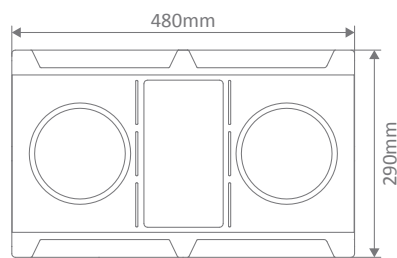

Item No.	Variant	Colour	CCT (Panel)	LED Panel Wattage
Profan 2	60010	White	3000K/5000K	12W



Profan Series




Profan 4

IP Rating
20Replacement
Warranty
(3yr)

Specification Features

Input Voltage: 220-240V
 Ball Bearing Motor: 40W
 IP rating (IP): IP20
 Heat Lamp: 4x275W Infrared
 LED Type: 1x16W LED Panel
 3000K/5000K, (Switchable)
 3000K - 1100lm
 5000K - 1200lm

Motor: 35W Ball Bearing
 Air Flow: 400m³/h
 Motor Speed: 1100rpm
 Fan Wheel: Ø160mm
 Noise: 48dB
 Switch: 4 Gang (Included)
 Warranty: 3 Years Replacement
 Cutout: 430x270mm
 Ceiling Depth: 240mm
 Grill Size: 480x360x21mm
 Duct size: Dia. 120mm
 Colours: White
 Accessories: 4 Gang Wall Switch
 150mm x 3M Aluminium Duct
 120mm to 150mm Adaptor
 Wall Extraction Plate Fascia
 2 x 160mm Pipe Clamp
 1 x 130mm Pipe Clamp

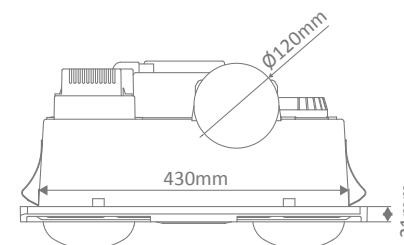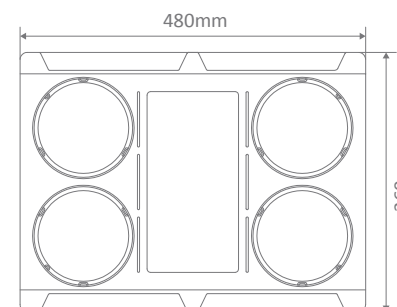

Item No.	Variant	Colour	CCT (Panel)	LED Panel Wattage
Profan 4	60012	White	3000K/5000K	16W



Shadow Series



Shadow-1-WB



Copper



Stainless Steel




Titanium Silver



Black



White



Item No.	Variant					Wattage	IP Rating	Lamp
	Blk	Cop	Tsl	Sts	Wht			
Shadow-1-WB	49011	49014	49013	49015	49012	6W	65	No lamp
	49138	49142	49150	49146	49156			GU10 3000K
	49140	49144	49152	49148	49158			GU10 5000K



Shadow Series



Shadow-2-WB



Copper



Stainless Steel




Titanium Silver



Black



White

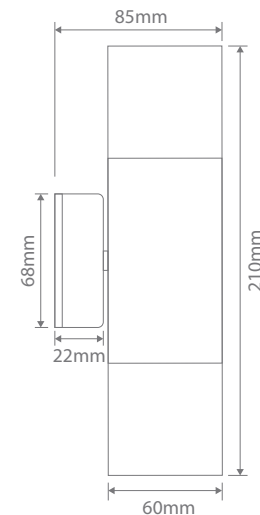


Item No.	Variant					Wattage	IP Rating	Lamp
	Blk	Cop	Tsl	Sts	Wht			
Shadow-2-WB	49021	49024	49023	49025	49022	2x6W	65	No Lamp
	49188	49192	49200	49196	49204			3000K
	49190	49194	49202	49198	49206			5000K




Shadow Series



Shadow-1-ADJ

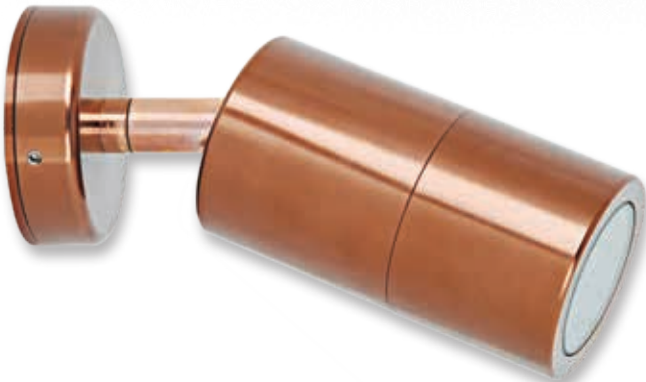

Copper

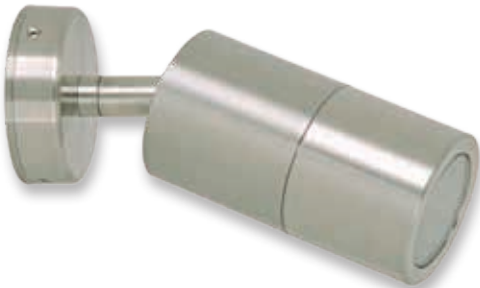


Stainless Steel



Titanium Silver

Black

White

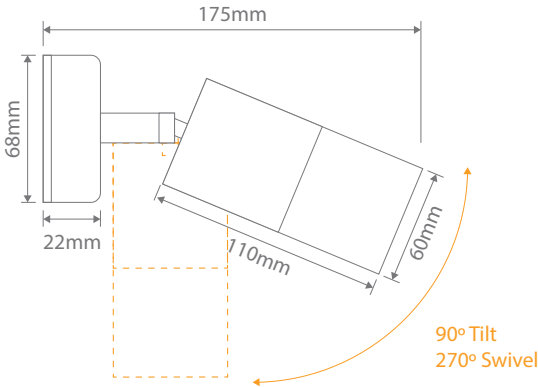

Item No.	Variant					Wattage	IP Rating	Lamp
	Blk	Cop	Tsl	Sts	Wht			
Shadow-1-ADJ	49041	49044	49043	49045	49042	6W	65	No Lamp
	49102	49106	49114	49110	49118			3000K
	49104	49108	49116	49112	49120			5000K

Exterior

Exterior



Shadow Series



Shadow-2-ADJ



Copper




Stainless Steel



Titanium Silver

Black

White

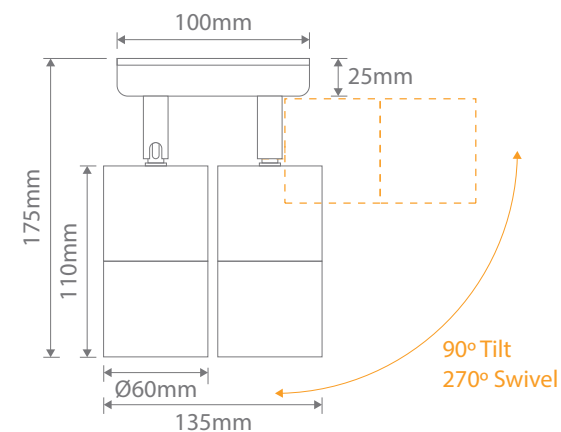

Item No.	Variant					Wattage	IP Rating	Lamp
	Blk	Cop	Tsl	Sts	Wht			
Shadow-2-ADJ	49051	49054	49053	49055	49052	2x6W	65	No Lamp
	49160	49164	49172	49168	49176			3000K
	49162	49166	49174	49170	49178			5000K



LED Wall Lights

Elite Series

- Anodised Aluminium.






Elite-1-WB



Elite-2-WB



Elite-SM



Item No.	Variant Alu	Wattage	IP Rating	CCT	Lumen Output
Elite-1-WB	19404	1x6W	54	3000K	450lm
	19405			5000K	500lm
	19398			No Lamp	N/A
Elite-2-WB	19406	2x6W	54	3000K	2x450lm
	19407			5000K	2x500lm
	19399			No Lamp	N/A
Elite-SM	19410	1x6W	54	3000K	450lm
	19411			5000K	500lm
	19412			No Lamp	N/A

Available in powder coated White and Black, upon request.



LED Wall Lights

Alpha Series

- Anodised Aluminium.
- Also available in powder coat black or white.






Alpha-1-WB



Alpha-2-WB



Alpha-SM



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Alpha-1-WB	19389	19400	19392	1x6W	54	3000K	450lm
	19390	19401	19393			5000K	500lm
	19388	19396	19391			No Lamp	N/A
Alpha-2-WB	19795	19402	19798	2x6W	54	3000K	2x450lm
	19596	19403	19799			5000K	2x500lm
	19594	19397	19797			No Lamp	N/A
Alpha-SM	19809	19413	19812	1x6W	54	3000K	450lm
	19810	19414	19813			5000K	500lm
	19808	19415	19811			No Lamp	N/A




Piper Series

- To suit LED 12W PAR-30 lamps.
- Cast Aluminium, powder coated.



Piper-Rnd

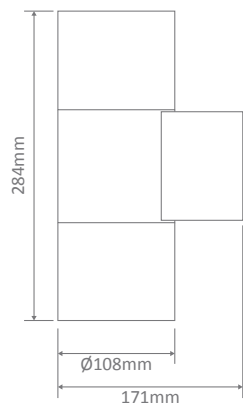

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Wht				
Piper-Rnd	49211	49215	49223	2x12W	65	3000K	2 x 1050lm
	49213	49217	49225			5000K	2 x 1100lm
	49210	49214	49222			No Lamp	N/A




Piper Series

- To suit LED 12W PAR-30 lamps.
- Cast Aluminium, powder coated.



Piper-Sqr

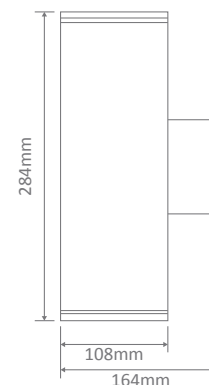

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Wht				
Piper-Sqr	49227	49231	49239	2x12W	65	3000K	2 x 1050lm
	49229	49233	49241			5000K	2 x 1100lm
	49226	49230	49238			No Lamp	N/A



LED Wall Lights

Mojo Series





- Cast Aluminium, powder coated.
- Inbuilt LED driver included.



Mojo-10



Mojo-20



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Wht				
Mojo-10	19660	19662	19664	10W	65	3000K	300lm
	19661	19663	19665			5000K	350lm
Mojo-20	19670	19672	19674	2x10W	65	3000K	2x300lm
	19671	19673	19675			5000K	2x350lm



MOJO-20-BLK




Whisper Series

- Tempered Opal Glass, cast Aluminium backing.
- Inbuilt LED driver included.



Whisper-6

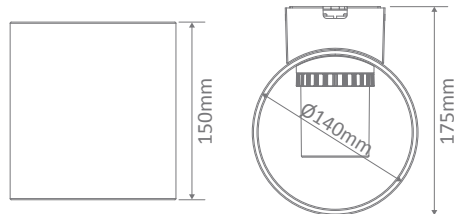

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Blk	Wht				
Whisper-6	19680	19678	10.5W	65	3000K	290lm
	19681	19679			5000K	340lm



WHISPER-6




Bell Series


- Cast Aluminium, powder coated.
- Inbuilt LED driver included.



Bell-8



Bell-13



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Wht				
Bell-8	19370	19372	19374	8W	65	3000K	300lm
	19371	19373	19375			5000K	350lm
Bell-13	19376	19378	19380	13W	65	3000K	500lm
	19377	19379	19381			5000K	550lm



BELL-8-DGR





Sierra Series

- Cast Aluminium, powder coated.
- Adjustable integrated light angle slides.
- Inbuilt LED driver included.



Sierra-12-Rnd


Sierra-12-Sqr



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Wht				
Sierra-12-Rnd	19634	19630	19632	12W	65	3000K	400lm
	19635	19631	19633			5000K	450lm
Sierra-12-Sqr	19640	19636	19638	12W	65	3000K	400lm
	19641	19637	19639			5000K	450lm



Adjustable Integrated Slides

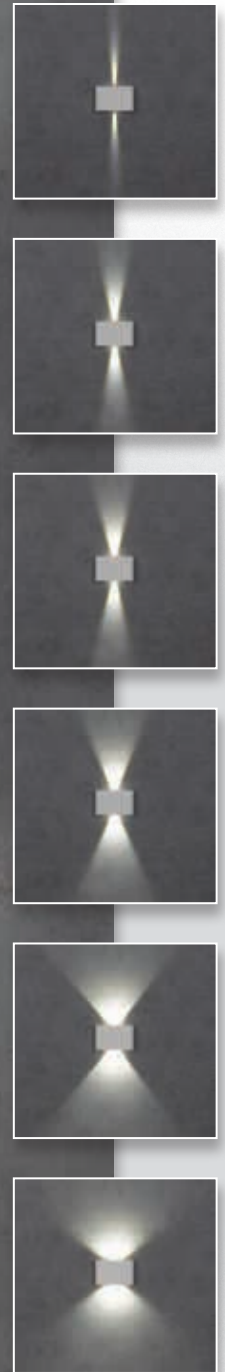




Block Series



- Cast Aluminium, powder coated.
- Anti-glare internal reflector.
- Inbuilt LED driver included.



Block-6



Block-12

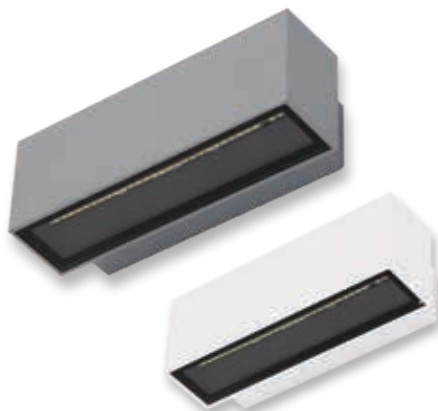

Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Block-6	19544	19546	19570	19572	2x3W	65	3000K	500lm
	19545	19547	19571	19573			5000K	550lm
Block-12	19548	19562	19576	19578	2x6W	65	3000K	950lm
	19549	19563	19577	19579			5000K	1100lm




Edge Series


- Cast Aluminium, powder coated.
- Inbuilt LED driver included.



Edge-4



Edge-8



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Wht				
Edge-4	19692	19694	19696	4W	65	3000K	150lm
	19693	19695	19697			5000K	180lm
Edge-8	19684	19686	19688	8W	65	3000K	300lm
	19685	19687	19689			5000K	350lm



LED Wall Lights

i-Wave Series

- Cast Aluminium, powder coated.
- 60 Degrees down, 25 Degrees up.
- Inbuilt LED driver included.



Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
i-Wave-6	19566	19574	19460	19616	2x3W	65	3000K	320lm
	19567	19575	19461	19617			5000K	360lm



LED Wall Lights

x-Wave Series

- Cast Aluminium, powder coated.
- 45 Degrees down, 25 Degrees up.
- Inbuilt LED driver included.



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Slr	Wht				
x-Wave-8	19656	19462	19658	2x4W	54	3000K	500lm
	19657	19463	19659			5000K	580lm




Cup Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.



Cup-10

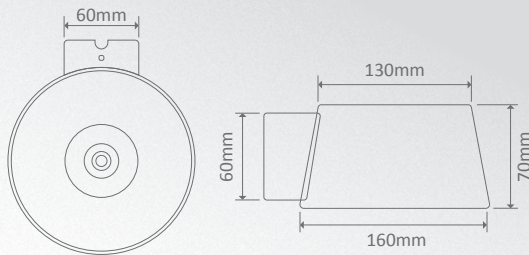

Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output
	Dgr	Slr				
Cup-10	19512	19510	10W	54	3000K	800lm
	19513	19511			5000K	850lm



CUP-10-DGR




Nesta Series

- Cast Aluminium, black or cream powder coated finishes, clear glass diffuser.
- Inbuilt LED driver included.
- Replaceable LED module.



Nesta-9



Item No.	Variant		Wattage	IP Rating	CCT	Lumen Output	
	Blk	Crm				3000K	5000K
Nesta-9	19755	19756	9W	65	DUO	470lm	470lm




Loftus Series

- Cast Aluminium, in black, dark grey or cream powder coated finishes, opal diffuser.
- Inbuilt LED driver included.
- Replaceable LED module.



Loftus-9



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output	
	Blk	Dgr	Crm				3000K	5000K
Loftus-9	19750	19752	19751	9W	65	DUO	437lm	437lm



LED Wall Lights


York Series

- Cast Aluminium, powder coated, opal glass diffuser.
- Inbuilt LED driver included.



York-7

York-12



Item No.	Variant			Wattage	IP Rating	CCT		Lumen Output
	Blk	Dgr	Wht					
York-7	19648	19644	19646	7W	65	3000K	350lm	
	19649	19645	19647			5000K	400lm	
York-12	19654	19650	19652	12W	65	3000K	800lm	
	19655	19651	19653			5000K	850lm	

YORK-12-BLK




LED Step Lights

Zone Series

- Injection moulded polycarbonate body.
- Inbuilt LED driver included.
- Clear and frosted tempered glass fascia.




Zone-2




Cutout: Ø68mm

Zone-4



Cutout: 114mm x 68mm

Zone-5



Cutout: 160mm x 68mm

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Zone-2	19720	2W	65	3000K	70lm
	19721			5000K	80lm
Zone-4	19722	4W	65	3000K	160lm
	19723			5000K	180lm
Zone-5	19724	5W	65	3000K	280lm
	19725			5000K	320lm






LED Step Lights

Zac Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.




Zac-4-Rnd



Cutout without recessed box: (Ø) 100mm
Cutout with recessed box: (Ø) 110mm

Zac-4-Sqr



Cutout without recessed box: (L) 100mm x (H) 100mm
Cutout with recessed box: (L) 110mm x (H) 110mm



ZAC-4-SQR-DGR



Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Zac-4-Rnd	19727	19729	19731	19733	4W	65	3000K	200lm
	19728	19730	19732	19734			5000K	250lm
Zac-4-Sqr	19735	19737	19739	19741	4W	65	3000K	200lm
	19736	19738	19740	19742			5000K	250lm




LED Step Lights

Zac Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.




Zac-8

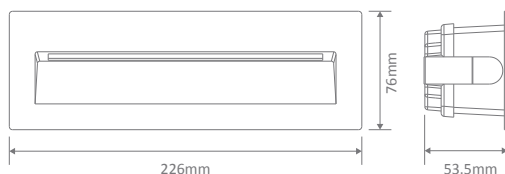

Cutout without recessed box: (L) 210mm x (H) 60mm
Cutout with recessed box: (L) 220mm x (H) 70mm

Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Zac-8	19760	19762	19764	19766	8W	65	3000K	300lm
	19761	19763	19765	19767			5000K	350lm

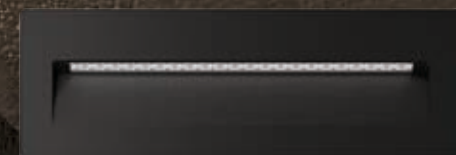

ZAC-8-BLK





Zeke-9 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.



Zeke-9-Rnd

Zeke-9-Sqr



Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Zeke-9-Rnd	19514	19488	19486	19506	9W	65	3000K	800lm
	19515	19489	19487	19507			5000K	900lm
Zeke-9-Sqr	19516	19492	19490	19508	9W	65	3000K	800lm
	19517	19493	19491	19509			5000K	900lm



Zeke-4 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.



Zeke-4-Rnd

Zeke-4-Sqr




Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Zeke-4-Rnd	19526	19702	19700	19704	4W	65	3000K	300lm
	19527	19703	19701	19705			5000K	350lm
Zeke-4-Sqr	19528	19708	19706	19710	4W	65	3000K	300lm
	19529	19709	19707	19711			5000K	350lm



LED Step Lights

Zeke-8 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.




Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Zeke-8	19542	19714	19712	19716	8W	65	3000K	500lm
	19543	19715	19713	19717			5000K	550lm



LED Step Lights

Step Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.

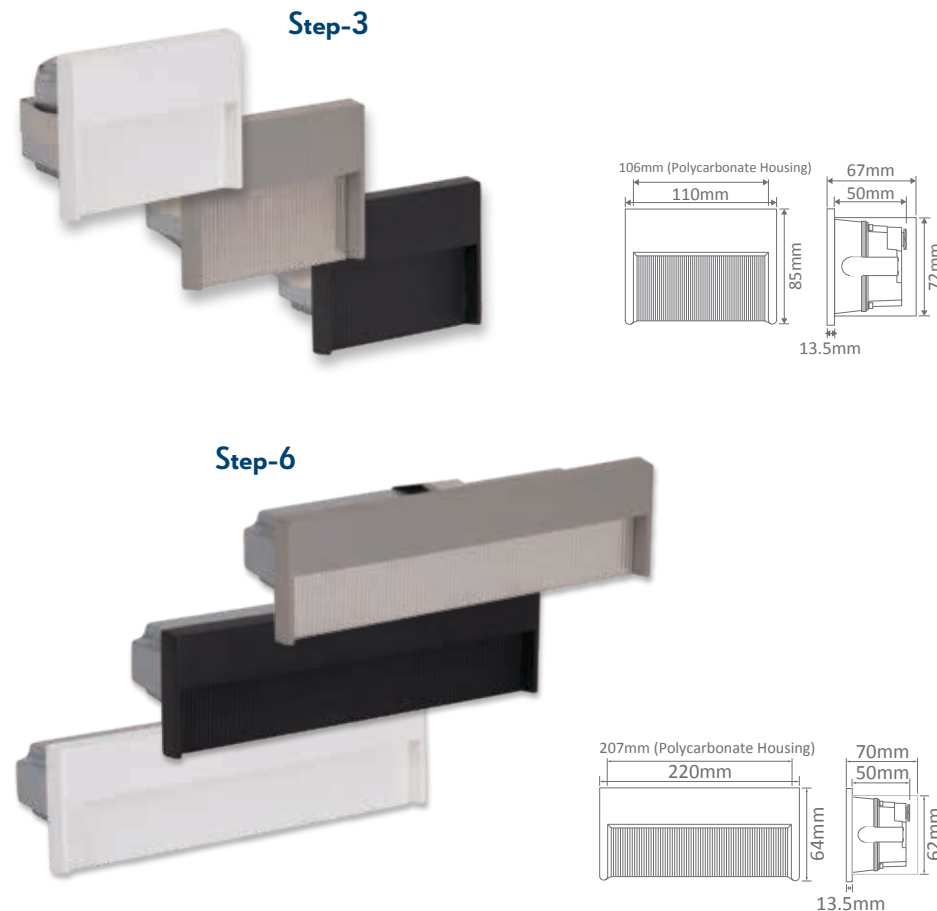



Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Slr	Wht				
Step-3	19824	19472	19826	3W	65	3000K	350lm
	19825	19473	19827			5000K	400lm
Step-6	19830	19474	19832	6W	65	3000K	350lm
	19831	19475	19833			5000K	400lm



LED Step Lights

Blade Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.

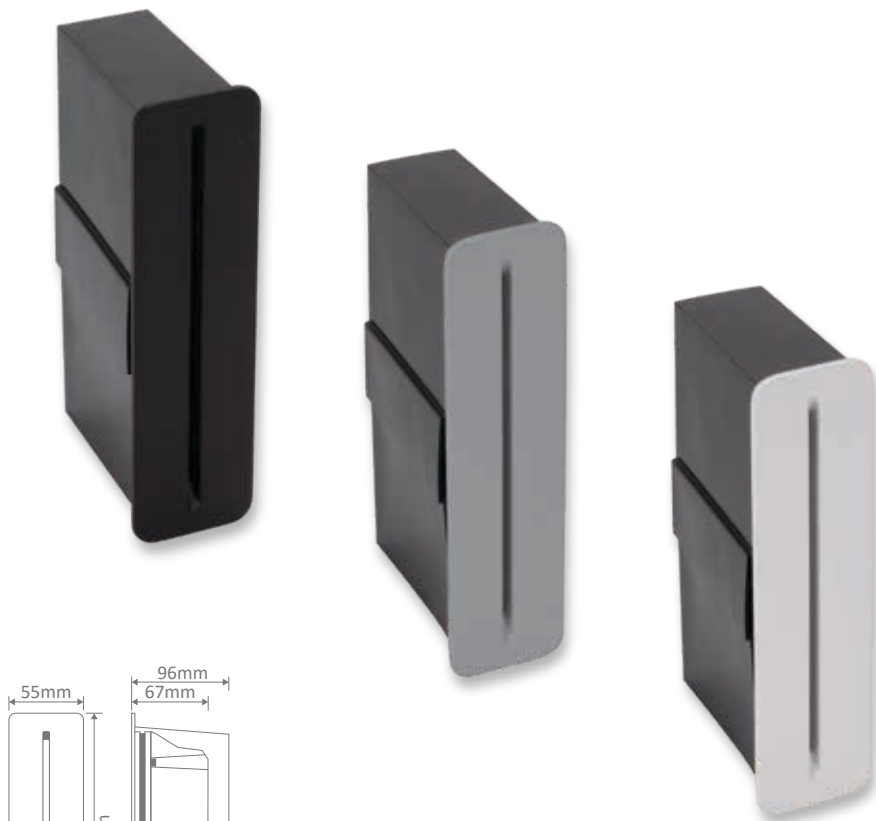


Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Slr	Wht				
Blade-4	19568	19484	19614	4W	65	3000K	160lm
	19569	19485	19615			5000K	180lm



LED Step Lights

Ixis Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.

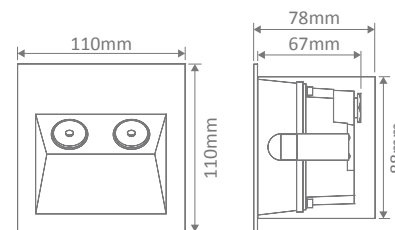

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Alu	Wht				
Ixis-Recessed	19835	19466	19837	3W	65	3000K	160lm
	19836	19467	19838			5000K	220lm




LED Step Lights

You Series

- Cast Aluminium powder coated.
- Inbuilt LED driver included.




You-3-Rnd




Depth without recessed box: (D) 46mm
Cutout without recessed box: (Ø) 70mm

You-3-Sqr

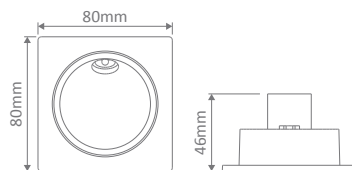

Depth without recessed box: (D) 46mm
Cutout without recessed box: (Ø) 70mm

Recessed Box (Included)

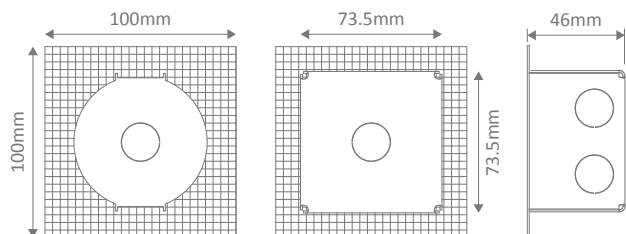


Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
You-3-Rnd	19985	3W	54	3000K	200lm
	19986			5000K	220lm
You-3-Sqr	19987	3W	54	3000K	200lm
	19988			5000K	220lm



LED Spotlights

Elite Adjustable

- Anodised Aluminium.
- Adjustable and Directional.



Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Elite-Adj	Alu	6W	54	3000K	450lm
	19408			5000K	500lm
	19416			No Lamp	N/A



LED Spotlights

Vision 9 Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.



Black

Vision-9




Dark Grey



Silver

White



Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Vision-9	19610	19520	19518	19612	9W	54	3000K	800lm
	19611	19521	19519	19613			5000K	850lm



LED Spotlights

Vision 12 Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.



Black

Vision-12




Dark Grey



Silver

White



Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Vision-12	19600	19524	19522	19606	12W	54	3000K	1000lm
	19601	19525	19523	19607			5000K	1100lm



Muro-Pro Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.



Muro-Pro-15



Muro-Pro-30



Dark Grey



Black



White



Black

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output		
	Blk	Dgr	Wht				Warm White 3000K	Neutral White 4000K	White 5000K
Muro-Pro-15	25053	25054	25055	15W	54	TRIO	950lm	1050lm	1000lm
Muro-Pro-30	25059	25060	25061	2x15W	54	TRIO	1900lm	2100lm	2000lm



Muro-Pro Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.
- PIR detection sensor (Passive Infrared Sensor)



Muro-Pro-15S



Muro-Pro-30S



White



Dark Grey



Dark Grey







Black

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output		
	Blk	Dgr	Wht				Warm White 3000K	Neutral White 4000K	White 5000K
Muro-Pro-15S	25056	25057	25058	15W	44	TRIO	950lm	1050lm	1000lm
Muro-Pro-30S	25062	25063	25064	2x15W	44	TRIO	1900lm	2100lm	2000lm




Blaze Series


- Polycarbonate fascia, PC optical lens.
- Inbuilt LED driver included.
- Adjustable and Directional.




Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Blaze-10	19596	10W	66	3000K	900lm
	19597			5000K	910lm
Blaze-20	19588	20W	66	3000K	1800lm
	19589			5000K	1900lm

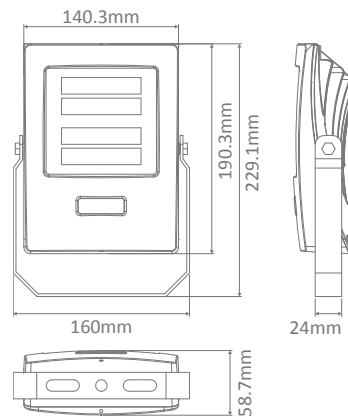

Blaze-30

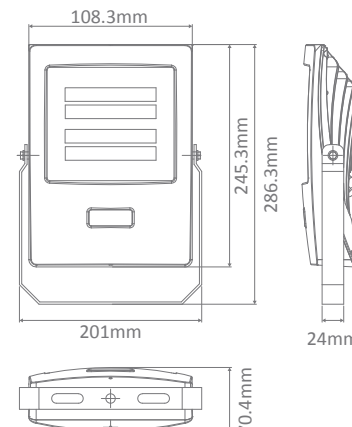


Blaze-50

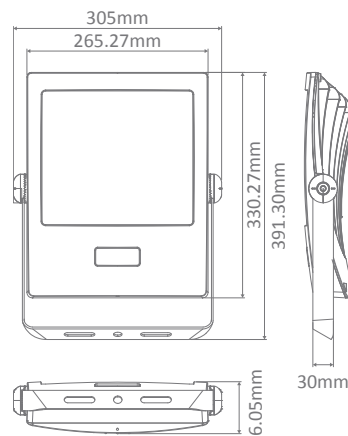

Blaze-100

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Blaze-30	19590	30W	66	3000K	2700lm
	19591			5000K	2850lm
Blaze-50	19592	50W	66	3000K	4500lm
	19593			5000K	4750lm
Blaze-100	19594	100W	66	3000K	9000lm
	19595			5000K	9500lm

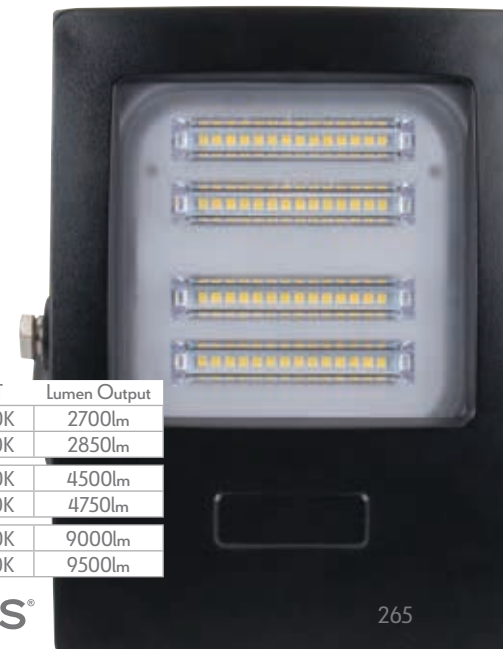




LED Floodlights

Flash-20 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.



Item No.	Variant				Wattage	IP Rating	CCT	Lumen Output
	Blk	Dgr	Slr	Wht				
Flash-20	19620	19564	19584	19586	20W	65	3000K	2000lm
	19621	19565	19585	19587			5000K	2200lm



LED Garden Lights

Zoom Series

- COB LED chip.
- Filters and Hood included (Zoom-12).
- Adjustable and Directional.



12W 30W


Zoom-12



Zoom-30



Change the light effect by adding a colour filter.




Item No.	Variant Blk	Wattage	IP Rating	CCT	Lumen Output	Requires
Zoom-12	25690	12W	67	5000K	500lm	12V DC Constant Voltage LED Driver - Wire in Parallel
	25693					
Zoom-30	25695	30W	67	3000K	2124lm	12V DC Constant Voltage LED Driver - Wire in Parallel
				5000K	2195lm	



Elite Spike

- Anodised Aluminium.
- Adjustable and Directional.

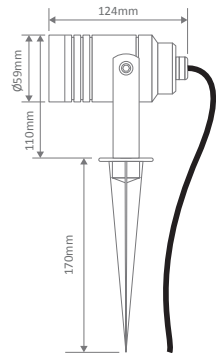VDC
1260°
Beam AngleReplacement
Warranty
3yr

Shadow Series


VDC
12IP Rating
65Replacement
Warranty
2yr

Black

Shadow-1-Grdn



316 Stainless Steel

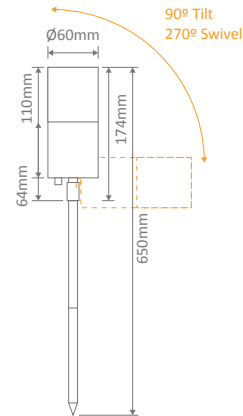

Item No.	Variant			Wattage	IP Rating	CCT	Lumen Output
	Blk	Sts	Alu				
Elite-Spike	N/A	N/A	19501	6W	54	3000K	450lm
	N/A	N/A	19500			5000K	500lm
	N/A	N/A	19499			No Lamp	N/A
Shadow-1-Grdn	49071	49072	N/A	6W	65	No lamp	N/A
	49122	49126	N/A			MR16 3000K	
	49124	49128	N/A			MR16 5000K	

Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel




Shadow Series

VDC
12IP Rating
65Replacement
Warranty
2yr


Shadow-1-Pth




Black

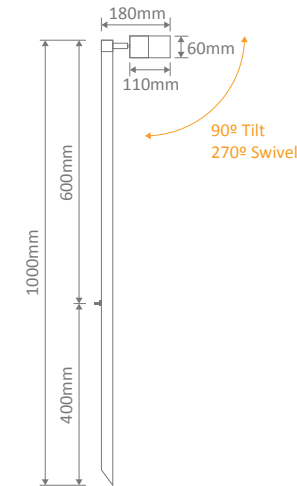

Shadow-2-Pth

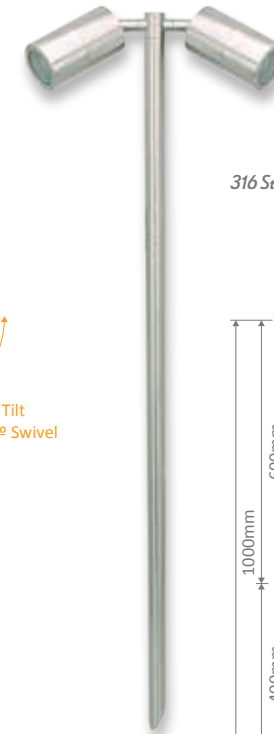

316 Stainless Steel

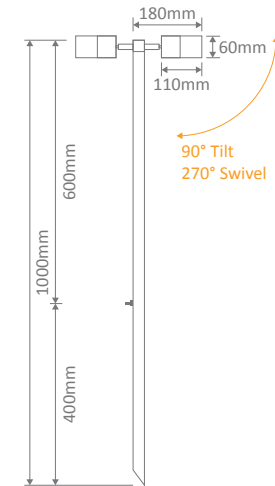

Item No.	Variant		Wattage	IP Rating	Lamp
	Blk	Sts			
Shadow-1-Pth	49081	49082	6W	65	No lamp
	49130	49134			MR16 3000K
	49132	49136			MR16 5000K
Shadow-2-Pth	49086	49087	6W	65	No lamp
	49180	49184			MR16 3000K
	49182	49186			MR16 5000K

Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel




Vivid Series



5 Pack DIY LED Deck Light kit, 5x0.6W, complete with plug and play cable and 12V DC LED Driver with flex and plug. 316 Stainless steel body with opal glass diffuser. Upgradable to maximum 10 lights by adding optional single deck light. Optional RF hand held dimmer (21100) also available upon request. Complete with 1 metre of cable per head.

Note: 1.8m Flex and Plug to LED Driver. Driver to first light is 50cm, each light has 1m left and right, so max 2m spacing.

Single Colour 5 Pack Kit



Cutout: \varnothing 25mm

RGB Colour 5 Pack Kit

Colour controller with RF remote control. Multiple pre-set colour scenes as well as the option of choosing desired colour.



Single Head



Single head only to suit 5 Pack DIY LED Deck Light kit. Designed only to be used with kits to allow for extra lights to be added. 316 Stainless steel body with opal glass diffuser. Complete with 1 metre of cable per head. Must be used only with VIVID series as an additional accessory to increase the number of heads from 5 to a maximum of 10 heads.



Single Colour Dimming Controller



Single colour dimming controller and RF remote control to suit 5 Pack DIY LED Deck Light kit. Designed for use with Warm White and White 5 pack LED Deck light kits only.

Must be used with single colour 5 Pack LED Deck Light Kits only.



Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output
Single Colour 5Pk	21101	5x0.6W	67	3000K	5x13lm
	21102			5000K	5x14lm
RGB Colour 5PK	21103	5x0.6W	67	RGB	N/A
Single Heads	21104	0.6W	67	3000K	13lm
	21105			5000K	14lm
	21106			RGB	N/A
Single Colour Dimming Controller	21100	N/A	N/A	N/A	N/A



Deka Series



- COB LED chip.
- Anodised Aluminium or Solid Brass fascia.
- Black anodised Aluminium body.
- 60 Degrees beam angle (on open face).
- Installation cannister included.

Open/Eyelid

1-4 Ways



DEKA-EYELID (Aluminium)



DEKA-EYELID (Brass)



DEKA-1WAY (Aluminium)



DEKA-1WAY (Brass)



DEKA-RND (Aluminium)



DEKA-RND (Brass)



DEKA-2WAY (Aluminium)



DEKA-2WAY (Brass)



DEKA-SQR (Aluminium)



DEKA-SQR (Brass)



DEKA-3WAY (Aluminium)



DEKA-3WAY (Brass)






DEKA-4WAY (Aluminium)



DEKA-4WAY (Brass)



Covers: SQR, RND
1,2,3,4 Way & Eyelid



Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
DEKA Body	19458	3W	65	3000K	300lm	12V DC Constant Voltage LED Driver – Wire in Parallel
	19459			5000K	350lm	


Item No.		Variant	
		Alu	Br
DEKA Fascia	Round Cover	19424	19438
	Square Cover	19426	19440
	Eyelid Cover	19436	19450
	1-Way	19428	19442
	2-Way	19430	19444
	3-Way	19432	19446
	4-Way	19434	19448

Please order this product in two parts using two codes, one for the body and another for the fascia.




Electromagnetic Induction


No direct cable connection
from base unit to LED Light.

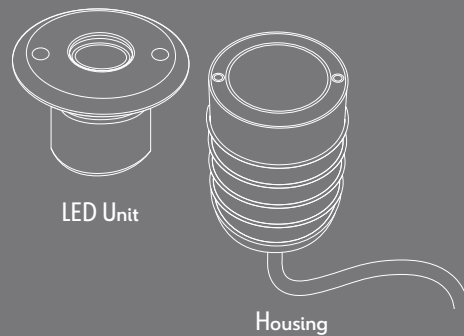

Induction technology passes current
to LED Light through magnetic process
to illuminate LED.

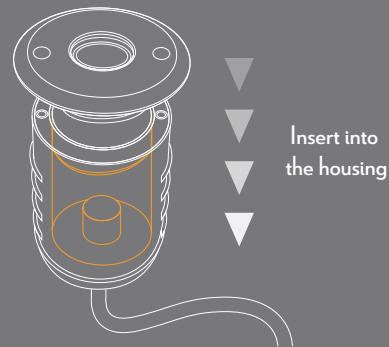

No more failed Inground lights
from filling up with water,
simply provide a 24V DC waterproof
connection to the unit.

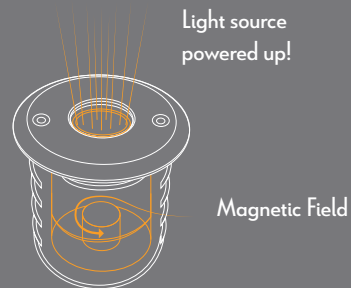


LED Inground Lights

Magneto Series

Introducing a revolutionary new design in inground lighting. The MAGNETO series from Domus features induction technology to transfer electrical current from the base pot to the light unit **WITHOUT** any cable connection. This avoids water syphoning through the cables and causing the LED light to prematurely fail due to moisture. Also provides for a very easy maintenance by simply unscrewing the light unit and replacing it without the need for an electrician. Ideal as a path light or inground light close to walls or columns to achieve wall washing or v-line effects. 3W 24V DC LED Inground light, 316 Stainless Steel Light Unit, optic lens diffuser. Available as a spot or flood.



Magneto-3 (60D or 25D)

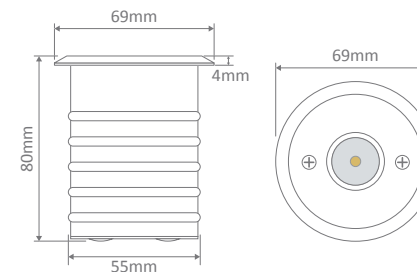

Cutout: Ø60-65mm




Item No.	Variant	Wattage	IP Rating	CCT	Beam Angle	Lumen Output	Requires
Magneto 3 60D	21082	3W	67	3000K	60°	95lm	24V DC Constant Voltage LED Driver - Wire in Parallel
	21083			5000K			
Magneto 3 25D	21080	3W	67	3000K	25°	95lm	24V DC Constant Voltage LED Driver - Wire in Parallel
	21081			5000K			



Magneto Series



Magneto-9-45D

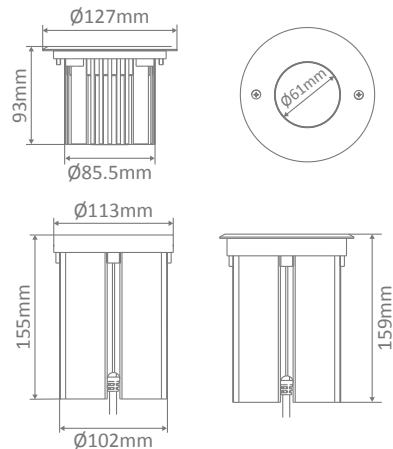

Cutout: Ø110-120mm




Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
Magneto-9-45D	21086	9W	67	3000K	675lm	24V DC Constant Voltage LED Driver - Wire in Parallel
	21088			5000K	720lm	



Magneto Series



Magneto-18-45D

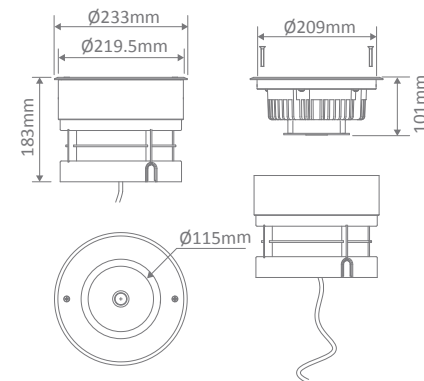

Cutout: Ø205-215mm



Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
Magneto-18-45D	21095	18W	67	3000K	1350lm	24V DC Constant Voltage LED Driver - Wire in Parallel
	21098			5000K	1450lm	




LED Inground Lights

Modula Series

- COB LED chip.
- Anodised Aluminium.
- Black anodised Aluminium body.
- 45 Degrees beam angle.
- Installation cannister included.




Modula-9-Rnd



Cutout: Ø110mm

Modula-9-Sqr



Cutout: Ø110mm

Item No.	Variant	Wattage	IP Rating	CCT	Lumen Output	Requires
Modula-9-Rnd	19420	9W	65	3000K	900lm	24V DC Constant Voltage
	19421			5000K	950lm	LED Driver - Wire in Parallel
Modula-9-Sqr	19422	9W	65	3000K	900lm	24V DC Constant Voltage
	19423			5000K	950lm	LED Driver - Wire in Parallel



LED Bunker Lights



Versa Series


- Polycarbonate Body and Diffuser.
- IK08 Impact rated.
- Triple wattage option.
- Inbuilt LED driver included.
- Side Conduit entry.



Versa-300-Eye



Versa-300-Pln

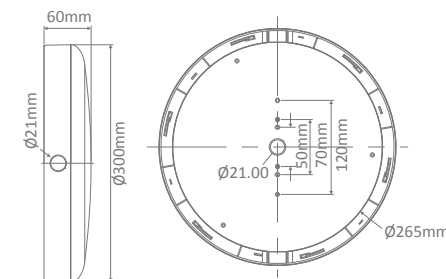

Item No.	Variant		Wattage (Switchable)	CCT	Watt	Lumen Output		
	Blk	Wht				Warm White 3000K	Neutral White 4000K	White 5700K
Versa-300-Pln	19800	19802	15W/18W/25W	TRIO	15W	1380lm	1420lm	1470lm
					18W	1560lm	1650lm	1710lm
					25W	2080lm	2200lm	2320lm
Versa-300-Eye	19804	19805	15W/18W/25W	TRIO	15W	830lm	850lm	880lm
					18W	940lm	990lm	1050lm
					25W	1250lm	1320lm	1400lm




Cylindrical Bunker Series


- Cast Aluminium, powder coated.
- Glass Diffuser.




AL-2800-Plain



AL-2801-Grille



AL-2802-Louvre



Item No.	Variant				IP Rating	Requires
	Blk	Slr	Wht	Spare Glass		
AL-2800-Pln	10784	10785	10795	10792	54	1xE27 Globe (Not Included)
AL-2801-GrI	10786	10788	10796	10792	54	1xE27 Globe (Not Included)
AL-2802-Lou	10790	10791	10797	19792	54	1xE27 Globe (Not Included)



Poly270 Oval Series



- Injection Moulded Thermoplastic body.
- Polycarbonate opal diffuser.



Poly270-OvI-Pln



Poly270-OvI-Eye

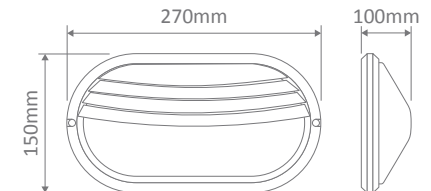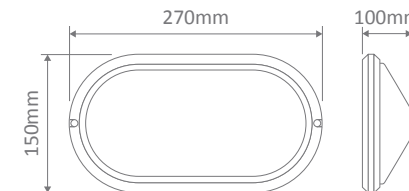

Item No.	Variant		IP Rating	Requires
	Blk	Wht		
Poly270-OvI-Pln	18623	18621	65	1xE27 Globe (Not Included)
Poly270-OvI-Eye	18619	18617	65	1xE27 Globe (Not Included)



Poly295 Oval Series



- Injection Moulded Thermoplastic body.
- Polycarbonate opal diffuser.



Poly295-Ovl-Pln



Poly295-Ovl-Eye

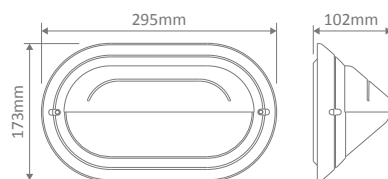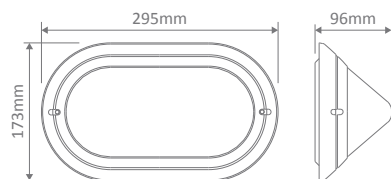

Item No.	Variant		IP Rating	Requires
	Blk	Wht		
Poly295-Ovl-Pln	18588	18481	65	1xE27 Globe (Not Included)
Poly295-Ovl-Eye	18479	18477	65	1xE27 Globe (Not Included)



Poly295 Round Series



- Injection Moulded Thermoplastic body.
- Polycarbonate opal diffuser.



Poly295-Rnd-Pln



Poly295-Rnd-Eye



Item No.	Variant		IP Rating	Requires
	Blk	Wht		
Poly295-Rnd-Pln	18592	18590	65	1xE27 Globe (Not Included)
Poly295-Rnd-Eye	18475	18473	65	1xE27 Globe (Not Included)




Polydome Series


- Injection Moulded Thermoplastic body.
- Polycarbonate opal diffuser.




Polydome-250

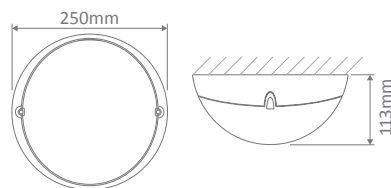

Polydome-340

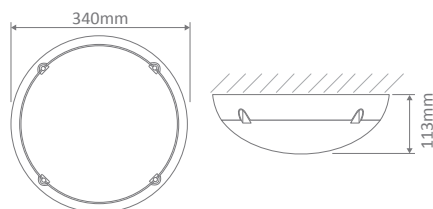

Polydome-425

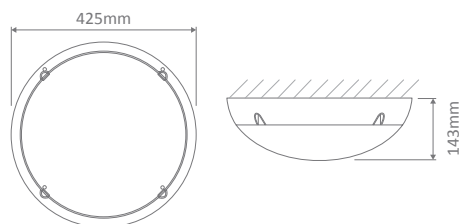

Item No.	Variant			IP Rating	Requires
	Blk	Slr	Wht		
Polydome-250	18645	18647	18643	66	1xE27 Globe (Not Included)
Polydome-340	18639	18641	18637	66	1xE27 Globe (Not Included)
Polydome-425	18651	18653	18649	66	2xE27 Globes (Not Included)




Poly 270 Round Series

- Injection Moulded Thermoplastic body.
- Polycarbonate opal diffuser.



Poly-270-Rnd

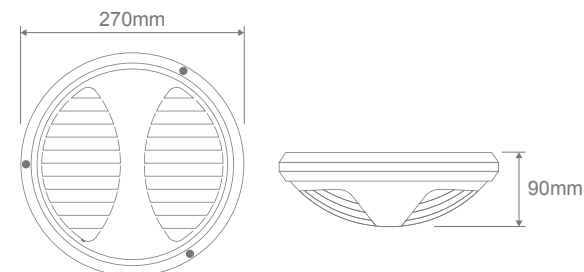

Item No.	Variant			IP Rating	Requires
	Blk	Slr	Wht		
Poly-270-Pln	18631	18595	18629	65	1xE27 Globe (Not Included)




Polywall Series

- Injection Moulded Thermoplastic body.
- Polycarbonate opal sphere.



Polywall-200



Item No.	Variant				IP Rating	Requires
	Blk/Smk	Blk/Opl	Wht/Smk	Wht/Opl		
Polywall-200	18616	18615	18614	18613	43	1xE27 Globe (Not Included)



60mm Aluminium Post Series



Item No.	Variant					Size
	Blk	Grn	Slr	Bge	Wht	
AP-6010	10820	10822	10821	10819	10824	60x1000mm
AP-6015	10826	10828	10827	10825	10830	60x1500mm
AP-6020	10832	10834	10833	10831	10836	60x2000mm
AP-6025	10838	10840	10839	10837	10842	60x2500mm



Polysphere Series


- Injection Moulded Thermoplastic Base.
- Polycarbonate Sphere.
- Designed to suit 60mm OD posts.



Opal



Smoke

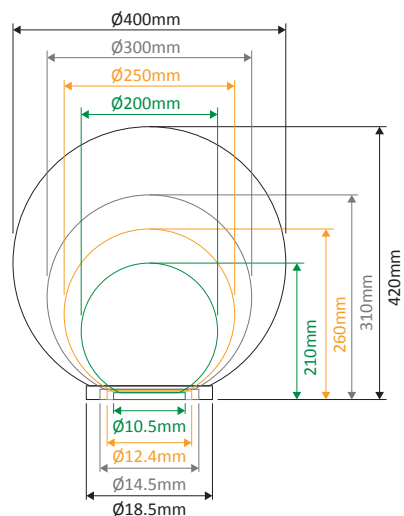


Sphere Hole Size:	
Inner Hole	Outer Hole
92mm	99mm
110mm	118mm
120mm	139mm
165mm	178mm

Item No.	Variant		IP Rating	Requires
	Blk/Opl	Blk/Smk		
Polysphere 200	18599	18600	44	1xE27 Globe (Not Included)
Polysphere 250	18601	18602	44	1xE27 Globe (Not Included)
Polysphere 300	18603	18604	44	1xE27 Globe (Not Included)
Polysphere 400	18605	18606	44	1xE27 Globe (Not Included)



Polymount Series

- Injection Moulded Thermoplastic Post and Base.
- Polycarbonate Sphere.

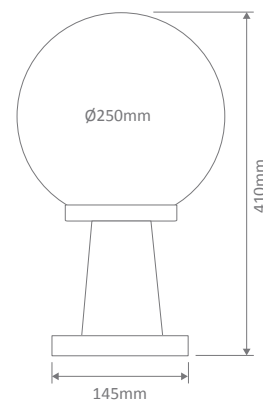

Item No.	Variant				IP Rating	Requires
	Blk/Smk	Blk/Opl	Wht/Smk	Wht/Opl		
Polymount 250	18610	18609	18612	18611	44	1xE27 Globe (Not Included)



Three Tier Bollard Head

- Cast Aluminium, powder coated.
- Designed to suit 76mm OD posts.



BL-100-Blk



BL-100-Grn




BL-100-Bge



BL-100-Wht




BL-100-Slr



Item No.	Variant					IP Rating	Requires
	Blk	Grn	Wht	Bge	Slr		
BL-100	10701	10703	10704	10700	10702	44	1xE27 Globe (Not Included)



- 76mm Aluminium post series.
- BB-100 base can hold 60mm post internally or 76mm post externally.
- Please note that 76mm post must be mechanically fixed to base manually, as there is no provision on the post nor the base supplied. Contractor to supply screw fixings and screws and assemble.

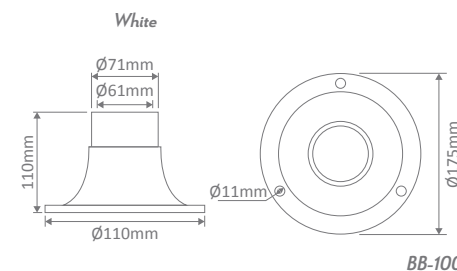

Item No.	Variant					Size
	Blk	Grn	Wht	Bge	Slr	
AP-7610	10850	10852	10853	10849	10851	76x1000mm
AP-7615	10855	10857	10858	10854	10856	76x1500mm
AP-7620	10860	10862	10863	10859	10861	76x2000mm
BB-100	10696	10698	10699	10695	10697	Suits 60mm & 76mm post




Monaco

Monaco Series


- Cast Aluminium, powder coated.
- Clear Polycarbonate Diffuser.




GT-652 Wall Bracket
Curved Arm




GT-654 Wall Bracket
Straight Arm



GT-653 Post Bracket
to suit 60mm post mounting only



GT-650 Pendant




Item No & Variant		Colour		Globe
GT-652	GT-654			
15806	15812	Beige		E27
15807	15813	Black		
15808	15814	Burgundy		
15809	15815	Green		
15811	15817	White		




Monaco

GT-653 Post Bracket
to suit 60mm post mounting only



GT-650 Pendant



Item No & Variant		Colour		Globe
GT-650	GT-653			
15800	16016	Beige		E27
15801	16017	Black		
15802	16018	Burgundy		
15803	16019	Green		
15805	16110	White		



Monaco


GT-657 Twin Head on Post 1.35m



GT-656 Single Head on Post 1.35m



Width per model:
Single Head - 430mm
Double Head - 840mm



Item No & Variant		Colour		Globe
GT-656	GT-657			
15818	15824	Beige		E27*
15819	15825	Black		
15820	15826	Burgundy		
15821	15827	Green		
15823	15829	White		

*The amount of globes needed will depend on the quantity of heads.



Monaco


GT-658 Single Head on Post 1.98m



GT-659 Twin Head on Post 1.98m



Width per model:
Single Head - 430mm
Double Head - 840mm

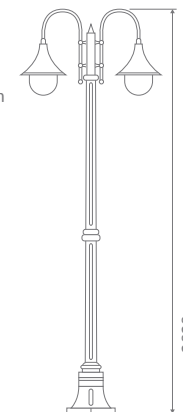

Item No & Variant		Colour		Globe
GT-658	GT-659			
15830	15836	Beige		E27*
15831	15837	Black		
15832	15838	Burgundy		
15833	15839	Green		
15835	15841	White		

*The amount of globes needed will depend on the quantity of heads.



GT-664 Triple Head on Post 2.35m




GT-660 Single Head on Post 2.35m



GT-662 Twin Head on Post 2.35m



Width per model:
Single Head - 430mm
Double Head - 840mm
Triple Head - 820mm

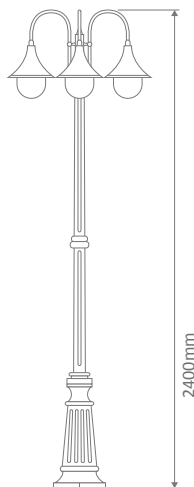

Item No & Variant			Colour	Globe
GT-660	GT-662	GT-664		
15842	15848	15854	Beige	E27*
15843	15849	15855	Black	
15844	15850	15856	Burgundy	
15845	15851	15857	Green	
15847	15853	15859	White	

*The amount of globes needed will depend on the quantity of heads.



GT-1064 Triple Head on Plain Post 2.40m



GT-1068 Single Head on Plain Post 2.40m



GT-1066 Twin Head on Plain Post 2.40m



Width per model:
Single Head - 540mm
Double Head - 840mm



Item No & Variant			Colour	Globe
GT-1064	GT-1066	GT-1068		
15860	15866	15872	Beige	E27*
15861	15867	15873	Black	
15862	15868	15874	Burgundy	
15863	15869	15875	Green	
15865	15871	15877	White	

*The amount of globes needed will depend on the quantity of heads.




Lisbon

Lisbon Series


- Cast Aluminium, powder coated.
- Polycarbonate Sphere.



GT-600 Wall Bracket (250mm Sphere)



GT-602 Wall Bracket (300mm Sphere)



Item No & Variant		Colour	Globe
GT-600	GT-602		
15662	15668	Beige	1xE27
15663	15669	Black	
15664	15670	Burgundy	
15665	15671	Green	
15667	15673	White	



Lisbon

GT-608 (250mm Sphere)

GT-609 (300mm Sphere)

Double Head on Post 1.32m




GT-606 (250mm Sphere)

GT-607 (300mm Sphere)

Single Head on Post 1.32m



Width per model:
Single Head - 430mm
Double Head - 820mm

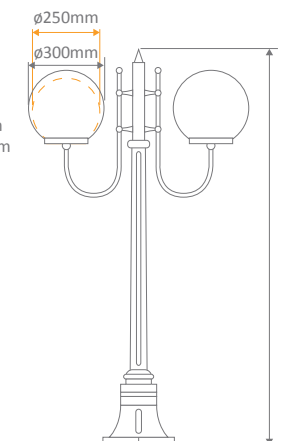

Item No & Variant				Colour	Globe
GT-606	GT-607	GT-608	GT-609		
15674	15680	15686	15692	Beige	E27*
15675	15681	15687	15693	Black	
15676	15682	15688	15694	Burgundy	
15677	15683	15689	15695	Green	
15679	15685	15691	15697	White	


*The amount of globes needed will depend on the quantity of heads.



Lisbon

GT-614 (250mm Sphere)
GT-615 (300mm Sphere)
Double Head on Post 1.94m

GT-612 (250mm Sphere)
GT-613 (300mm Sphere)
Single Head on Post 1.94m

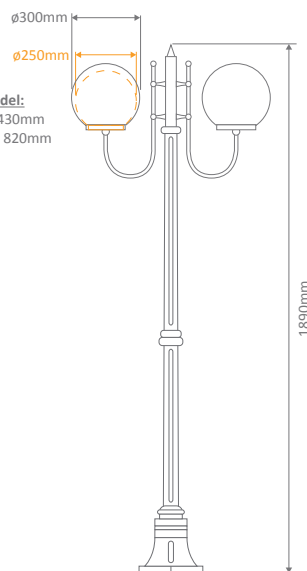

Item No & Variant				Colour	Globe
GT-612	GT-613	GT-614	GT-615		
15698	15704	15710	15716	Beige	E27*
15699	15705	15711	15717	Black	
15700	15706	15712	15718	Burgundy	
15701	15707	15713	15719	Green	
15703	15709	15715	15721	White	


*The amount of globes needed will depend on the quantity of heads.



Lisbon

GT-620 (250mm Sphere)
GT-621 (300mm Sphere)
Double Head on Post 2.29m

GT-618 (250mm Sphere)
GT-619 (300mm Sphere)
Single Head on Post 2.29m

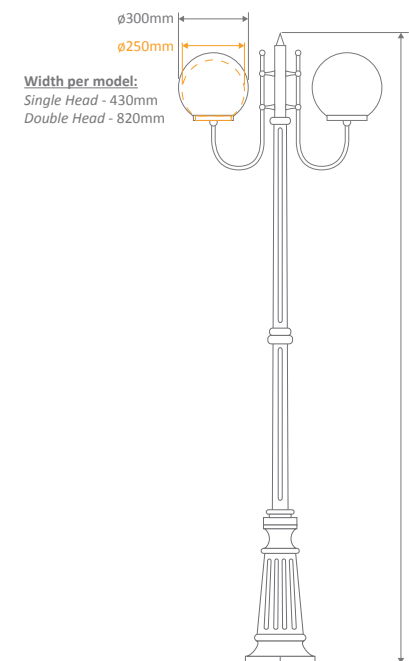

Item No & Variant				Colour	Globe
GT-618	GT-619	GT-620	GT-621		
15722	15728	15734	15740	Beige	E27*
15723	15729	15735	15741	Black	
15724	15730	15736	15742	Burgundy	
15725	15731	15737	15743	Green	
15727	15733	15739	15745	White	


*The amount of globes needed will depend on the quantity of heads.



Lisbon

GT-626 (250mm Sphere)
GT-627 (300mm Sphere)
Quadruple Head on Post 2.54m

GT-622 (250mm Sphere)
GT-623 (300mm Sphere)
Triple Head on Post 2.54m

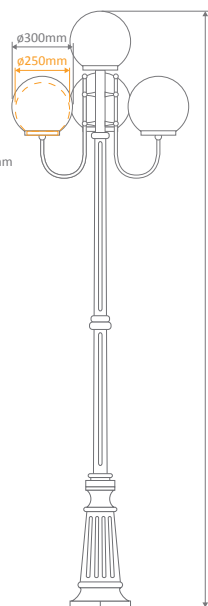

Width per model:
Triple Head - 890mm
Quadruple Head - 780mm


Item No & Variant				Colour	Globe
GT-622	GT-623	GT-626	GT-627		
15746	15752	15770	15776	Beige	E27*
15747	15753	15771	15777	Black	
15748	15754	15772	15778	Burgundy	
15749	15755	15773	15779	Green	
15751	15757	15775	15781	White	

*The amount of globes needed will depend on the quantity of heads.



Lisbon

GT-624 (250mm Sphere)
GT-625 (300mm Sphere)
Triple Head on Post 2.29m

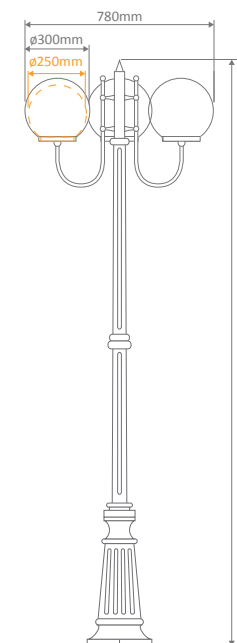

Variant		Colour	Globe
GT-624	GT-625		
15758	15764	Beige	3xE27
15759	15765	Black	
15760	15766	Burgundy	
15761	15767	Green	
15763	15769	White	



Lisbon

GT-1003 Triple Head on Plain Post 2.4m



GT-1001 Single Head on Plain Post 2.4m



GT-1002 Twin Head on Plain Post 2.4m



Width per model:
Single Head - 420mm
Double Head - 820mm
Triple Head - 780mm



Item No & Variant			Colour		Globe
GT-1001	GT-1002	GT-1003			E27*
15782	15788	15794	Beige		
15783	15789	15795	Black		
15784	15790	15796	Burgundy		
15785	15791	15797	Green		
15787	15793	15799	White		

*The amount of globes needed will depend on the quantity of heads.



Siena

Siena Series

- Cast Aluminium, powder coated.
- Polycarbonate Sphere.



GT-544 (200mm Sphere)



GT-545 (250mm Sphere)

Wall Bracket



GT-502 (200mm Sphere)

Wall Bracket

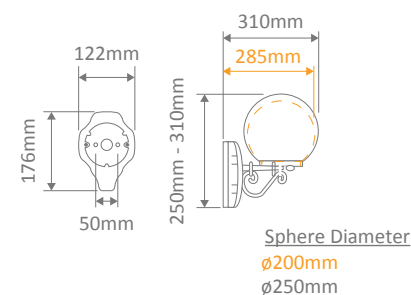


Item No & Variant		Colour		Globe
GT-544	GT-545			1xE27
15566	15572	Beige		
15567	15573	Black		
15568	15574	Burgundy		
15569	15575	Green		
15571	15577	White		

Item No & Variant	Colour		Globe
GT-502			1xE27
15518	Beige		
15519	Black		
15520	Burgundy		
15521	Green		
15523	White		




Siena

GT-503 (250mm Sphere)
GT-504 (300mm Sphere)
180mm Pillar Mount




Item No & Variant		Colour	Globe
GT-503	GT-504		
15524	15530	Beige	1xE27
15525	15531	Black	
15526	15532	Burgundy	
15527	15533	Green	
15529	15535	White	

GT-530 (200mm Sphere)
GT-531 (250mm Sphere)
80mm Pillar Mount



Item No & Variant		Colour	Globe
GT-530	GT-531		
15536	15542	Beige	1xE27
15537	15543	Black	
15538	15544	Burgundy	
15539	15545	Green	
15541	15547	White	

GT-535 (200mm Sphere)
GT-536 (250mm Sphere)
GT-537 (300mm Sphere)
Pendant




Item No & Variant			Colour	Globe
GT-535	GT-536	GT-537		
15548	15554	15560	Beige	1xE27
15549	15555	15561	Black	
15550	15556	15562	Burgundy	
15551	15557	15563	Green	
15553	15559	15565	White	




Siena

GT-553 (250mm Sphere)
GT-554 (300mm Sphere)
Single Sphere on Post 950mm



Item No & Variant		Colour	Globe
GT-553	GT-554		
15578	15584	Beige	1xE27
15579	15585	Black	
15580	15586	Burgundy	
15581	15587	Green	
15583	15589	White	

GT-567 (250mm Sphere)
GT-568 (300mm Sphere)
Twin Sphere on Post 1.1m

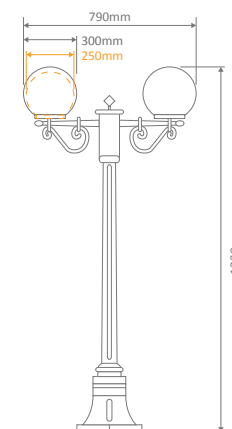


Item No & Variant		Colour	Globe
GT-567	GT-568		
15638	15644	Beige	2xE27
15639	15645	Black	
15640	15646	Burgundy	
15641	15647	Green	
15643	15649	White	




Siena

GT-555 (250mm Sphere)
GT-556 (300mm Sphere)
Single Sphere on Post 1.6m



Item No & Variant		Colour	Globe
GT-555	GT-556		
15590	15596	Beige	1xE27
15591	15597	Black	
15592	15598	Burgundy	
15593	15599	Green	
15595	15601	White	

GT-569 (250mm Sphere)
GT-570 (300mm Sphere)
Twin Sphere on Post 1.75m

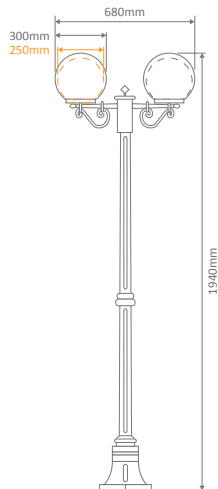


Item No & Variant		Colour	Globe
GT-569	GT-570		
15650	15656	Beige	2xE27
15651	15657	Black	
15652	15658	Burgundy	
15653	15659	Green	
15655	15661	White	



Siena

GT-557 (250mm Sphere)
GT-558 (300mm Sphere)
Single Sphere on Post 1.96m




Variant		Colour	Globe
GT-557	GT-558		
15602	15608	Beige	E27
15603	15609	Black	
15604	15610	Burgundy	
15605	15611	Green	
15607	15613	White	



Siena

GT-562 (250mm Sphere)
GT-573 (300mm Sphere)
Triple Spheres on Post 2.1m

GT-560 (250mm Sphere)
GT-561 (300mm Sphere)
Twin Spheres on Post 2.1m

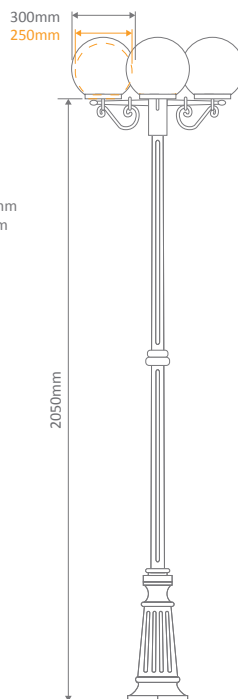

Width per model:
Double Head - 730mm
Triple Head - 700mm

Item No & Variant				Colour	Globe
GT-560	GT-561	GT-562	GT-563		
15614	15620	15626	15632	Beige	E27*
15615	15621	15627	15633	Black	
15616	15622	15628	15634	Burgundy	
15617	15623	15629	15635	Green	
15619	15625	15631	15637	White	

*The amount of globes needed will depend on the quantity of heads.

DOMUS®

domuslighting.com.au




Vienna

Vienna


- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.



GT-671 Wall Bracket
Straight Arm Facing Up



GT-672 Wall Bracket
Straight Arm Facing Down



Variant	Colour	Globe
15884	Beige	1xB22
15885	Black	
15886	Burgundy	
15887	Green	
15889	White	

Variant	Colour	Globe
15890	Beige	1xB22
15891	Black	
15892	Burgundy	
15893	Green	
15895	White	

DOMUS®

domuslighting.com.au


Traditional Exterior

Traditional Exterior




Vienna

GT-1031 Wall Bracket
Curved Arm Facing Up




Variant	Colour	Globe
15956	Beige	1xB22
15957	Black	
15958	Burgundy	
15959	Green	
15961	White	

GT-1032 Wall Bracket
Curved Arm Facing Down



Variant	Colour	Globe
15962	Beige	1xB22
15963	Black	
15964	Burgundy	
15965	Green	
15967	White	

GT-670 Single Pendant




Variant	Colour	Globe
15878	Beige	1xB22
15879	Black	
15880	Burgundy	
15881	Green	
15883	White	




Vienna

GT-673 Pillar Mount




Variant	Colour	Globe
15896	Beige	1xB22
15897	Black	
15898	Burgundy	
15899	Green	
15901	White	

GT-689 Post Top



Variant	Colour	Globe
15950	Beige	1xB22
15951	Black	
15952	Burgundy	
15953	Green	
15955	White	

GT-685 Surface Mounted



Variant	Colour	Globe
15944	Beige	1xB22
15945	Black	
15946	Burgundy	
15947	Green	
15949	White	



Vienna

GT-674 Single Head Post on 1.31m




Variant	Colour	Globe
15902	Beige	1xB22
15903	Black	
15904	Burgundy	
15905	Green	
15907	White	




Vienna

GT-676 Single Head on Post 1.93m




Variant	Colour	Globe
15914	Beige	1xB22
15915	Black	
15916	Burgundy	
15917	Green	
15919	White	

GT-675 Twin Head on Post 1.46m

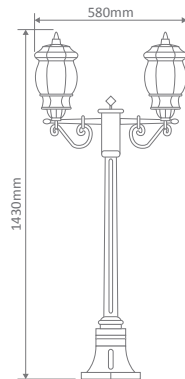

Variant	Colour	Globe
15908	Beige	2xB22
15909	Black	
15910	Burgundy	
15911	Green	
15913	White	


GT-677 Double Head on Post 2.08m

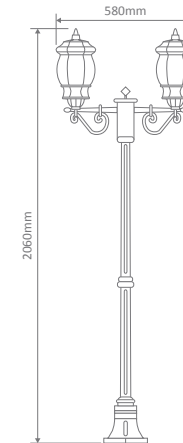

Variant	Colour	Globe
15920	Beige	2xB22
15921	Black	
15922	Burgundy	
15923	Green	
15925	White	




GT-678 Single Head on Post 2.3m



Variant	Colour	Globe
15926	Beige	1xB22
15927	Black	
15928	Burgundy	
15929	Green	
15931	White	


GT-680 Twin Head on Post 2.44m

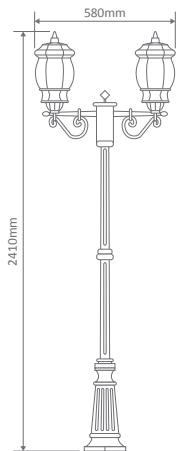

Variant	Colour	Globe
15932	Beige	2xB22
15933	Black	
15934	Burgundy	
15935	Green	
15937	White	



GT-682 Triple Head on Post 2.44m

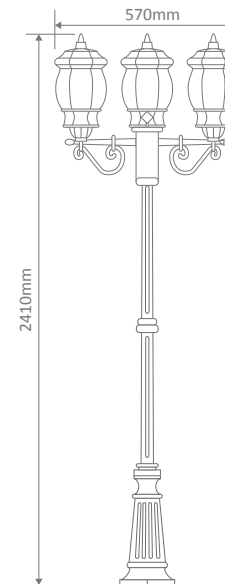

Variant	Colour	Globe
15938	Beige	3xB22
15939	Black	
15940	Burgundy	
15941	Green	
15943	White	




Vienna Large Series

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.




GT-691 Large Wall Bracket



Variant	Colour	Globe
15986	Beige	1xB22
15987	Black	
15988	Burgundy	
15989	Green	
15991	White	

GT-692 Large Wall Bracket



Variant	Colour	Globe
15992	Beige	1xB22
15993	Black	
15994	Burgundy	
15995	Green	
15997	White	




GT-693 Large Pillar Mount




Variant	Colour	Globe
15998	Beige	1xB22
15999	Black	
16000	Burgundy	
16001	Green	
16003	White	

GT-690 Large Pendant

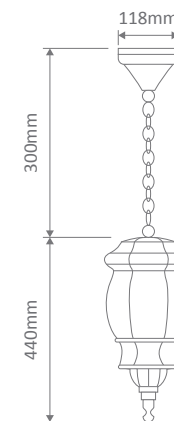

Variant	Colour	Globe
15980	Beige	1xB22
15981	Black	
15982	Burgundy	
15983	Green	
15985	White	

GT-696 Large Post Top




Variant	Colour	Globe
16004	Beige	1xB22
16005	Black	
16006	Burgundy	
16007	Green	
16009	White	



Vienna Large

GT-698 Large Single Head on Post 2.4m



Variant	Colour	Globe
16010	Beige	1xB22
16011	Black	
16012	Burgundy	
16013	Green	
16015	White	

domuslighting.com.au




Chester

Chester Series

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.




GT-131 Wall Bracket
Straight Arm Facing Up



Variant	Colour	Globe
14972	Beige	1xB22
14973	Black	
14974	Burgundy	
14975	Green	
14977	White	

domuslighting.com.au

GT-132 Wall Bracket
Straight Arm Facing Down



Variant	Colour	Globe
14978	Beige	1xB22
14979	Black	
14980	Burgundy	
14981	Green	
14983	White	

DOMUS®

321


Traditional Exterior

Traditional Exterior




Chester

GT-1073 Wall Bracket
Curved Arm Facing Up




Variant	Colour	Globe
15038	Beige	1xB22
15039	Black	
15040	Burgundy	
15041	Green	
15043	White	

GT-1074 Wall Bracket
Curved Arm Facing Down



Variant	Colour	Globe
15044	Beige	1xB22
15045	Black	
15046	Burgundy	
15047	Green	
15049	White	

GT-133 Pillar Mount




Variant	Colour	Globe
14984	Beige	1xB22
14985	Black	
14986	Burgundy	
14987	Green	
14989	White	




Chester

GT-149 Post Top



Variant	Colour	Globe
15032	Beige	1xB22
15033	Black	
15034	Burgundy	
15035	Green	
15037	White	

GT-130 Pendant




Variant	Colour	Globe
14966	Beige	1xB22
14967	Black	
14968	Burgundy	
14969	Green	
14971	White	



Chester

GT-134 Single Head on Post 1.32m



Variant	Colour	Globe
14990	Beige	1xB22
14991	Black	
14992	Burgundy	
14993	Green	
14995	White	




Chester

GT-136 Single Head on Post 1.96m




Variant	Colour	Globe
15002	Beige	1xB22
15003	Black	
15004	Burgundy	
15005	Green	
15007	White	

GT-135 Twin Head on Post 1.49m

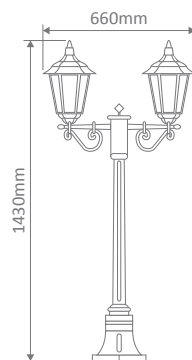

Variant	Colour	Globe
14996	Beige	2xB22
14997	Black	
14998	Burgundy	
14999	Green	
15001	White	

GT-137 Twin Head on Post 2.11m

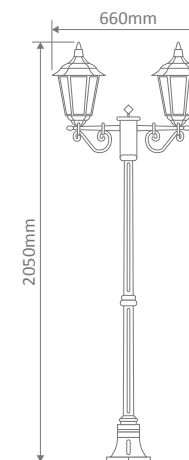


Variant	Colour	Globe
15008	Beige	2xB22
15009	Black	
15010	Burgundy	
15011	Green	
15013	White	



Chester

GT-138 Single Head on Post 2.37m



Variant	Colour	Globe
15014	Beige	1xB22
15015	Black	
15016	Burgundy	
15017	Green	
15019	White	

domuslighting.com.au




Chester

GT-142 Triple Head on Post 2.47m



Width per model:
Double Head - 660mm
Triple Head - 630mm

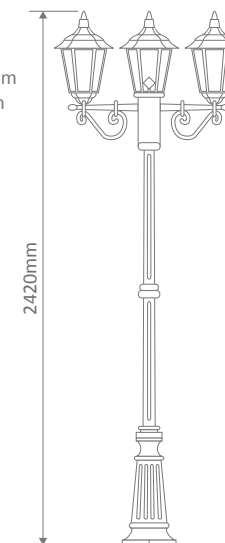

Item No & Variant		Colour	Globe
GT-140	GT-142		
15020	15026	Beige	B22*
15021	15027	Black	
15022	15028	Burgundy	
15023	15029	Green	
15025	15031	White	

*The amount of globes needed will depend on the quantity of heads.

domuslighting.com.au




GT-140 Twin Head on Post 2.47m



Chester

GT-1078 Triple Curved Arm Head on Post 2.4m

GT-1077 Twin Curved Arm Head on Post 2.4m

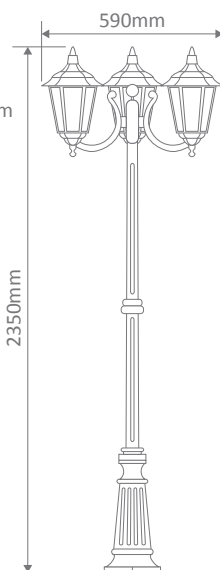

Width per model:
Double Head - 630mm
Triple Head - 590mm

Item No & Variant		Colour	Globe
GT-1077	GT-1078		
15050	15056	Beige	B22*
15051	15057	Black	
15052	15058	Burgundy	
15053	15059	Green	
15055	15061	White	

*The amount of globes needed will depend on the quantity of heads.




Chester Large

Chester Large Series


- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.



GT-161 Large Up Wall Bracket



GT-162 Large Down Wall Bracket



Variant	Colour	Globe
15062	Beige	1xB22
15063	Black	
15064	Burgundy	
15065	Green	
15067	White	

Variant	Colour	Globe
15068	Beige	1xB22
15069	Black	
15070	Burgundy	
15071	Green	
15073	White	




Chester Large

GT-163 Large Pillar Mount




Variant	Colour	Globe
15074	Beige	1xB22
15075	Black	
15076	Burgundy	
15077	Green	
15079	White	

GT-166 Large Post Top



Variant	Colour	Globe
15086	Beige	1xB22
15087	Black	
15088	Burgundy	
15089	Green	
15091	White	

GT-165 Large Pendant




Variant	Colour	Globe
15080	Beige	1xB22
15081	Black	
15082	Burgundy	
15083	Green	
15085	White	



Chester Large

GT-168 Single Head Post 2.45m



Variant	Colour	Globe
15092	Beige	1xB22
15093	Black	
15094	Burgundy	
15095	Green	
15097	White	




Paris

Paris Series


- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.



GT-231 Wall Bracket




GT-232 Wall Bracket



Variant	Colour	Globe
15116	Beige	1xB22
15117	Black	
15118	Burgundy	
15119	Green	
15121	White	


Variant	Colour	Globe
15122	Beige	1xB22
15123	Black	
15124	Burgundy	
15125	Green	
15127	White	

GT-233 Pillar Mount




Variant	Colour	Globe
15128	Beige	1xB22
15129	Black	
15130	Burgundy	
15131	Green	
15133	White	

GT-249 Post Top



Variant	Colour	Globe
15182	Beige	1xB22
15183	Black	
15184	Burgundy	
15185	Green	
15187	White	

GT-230 Pendant



Variant	Colour	Globe
15110	Beige	1xB22
15111	Black	
15112	Burgundy	
15113	Green	
15115	White	




Paris



Paris

GT-245 Wall Mounted




Variant	Colour	Globe
15176	Beige	1xB22
15177	Black	
15178	Burgundy	
15179	Green	
15181	White	




Paris

GT-235 Twin Head on Post 1.46m

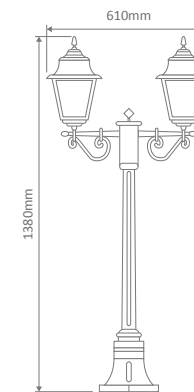


Variant	Colour	Globe
15140	Beige	2xB22
15141	Black	
15142	Burgundy	
15143	Green	
15145	White	

GT-234 Single Head on Post 1.31m



Variant	Colour	Globe
15134	Beige	1xB22
15135	Black	
15136	Burgundy	
15137	Green	
15139	White	

GT-236 Single Head on Post 1.94m




Variant	Colour	Globe
15146	Beige	1xB22
15147	Black	
15148	Burgundy	
15149	Green	
15151	White	




Paris

GT-237 Twin Head on Post 2.09m

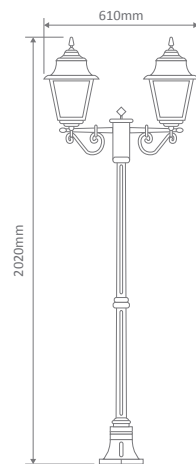

Variant	Colour	Globe
15152	Beige	2x B22
15153	Black	
15154	Burgundy	
15155	Green	
15157	White	

GT-238 Single Head on Post 2.3m



Variant	Colour	Globe
15158	Beige	1x B22
15159	Black	
15160	Burgundy	
15161	Green	
15163	White	



Paris


GT-242 Triple Head on Post 2.45m



GT-240 Twin Head on Post 2.45m



Width per model:
Double Head - 610mm
Triple Head - 590mm

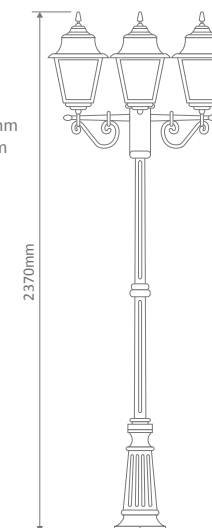

Item No & Variant	Colour	Globe
GT-240 15164	Beige	B22*
GT-242 15170	Beige	
15165	Black	
15166	Burgundy	
15167	Green	
15169	White	

*The amount of globes needed will depend on the quantity of heads.




Avignon

Avignon Series


- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.



GT-271 Wall Bracket




GT-272 Wall Bracket



Variant	Colour	Globe
15194	Beige	1xB22
15195	Black	
15196	Burgundy	
15197	Green	
15199	White	


Variant	Colour	Globe
15200	Beige	1xB22
15201	Black	
15202	Burgundy	
15203	Green	
15205	White	

GT-273 Pillar Mount




Variant	Colour	Globe
15206	Beige	1xB22
15207	Black	
15208	Burgundy	
15209	Green	
15211	White	

GT-289 Post Top



Variant	Colour	Globe
15254	Beige	1xB22
15255	Black	
15256	Burgundy	
15257	Green	
15259	White	

GT-270 Pendant




Variant	Colour	Globe
15188	Beige	1xB22
15189	Black	
15190	Burgundy	
15191	Green	
15193	White	



Avignon




GT-274 Single Head on Post 1.25m



Variant	Colour	Globe
15212	Beige	1xB22
15213	Black	
15214	Burgundy	
15215	Green	
15217	White	




GT-276 Single Head on Post 1.9m




Variant	Colour	Globe
15224	Beige	1xB22
15225	Black	
15226	Burgundy	
15227	Green	
15229	White	

GT-275 Twin Head on Post 1.4m



Variant	Colour	Globe
15218	Beige	2xB22
15219	Black	
15220	Burgundy	
15221	Green	
15223	White	


GT-277 Twin Head on Post 2.05m

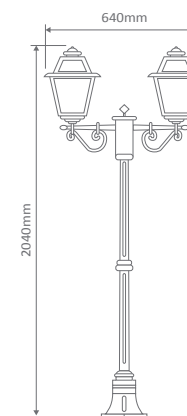

Variant	Colour	Globe
15230	Beige	2xB22
15231	Black	
15232	Burgundy	
15233	Green	
15235	White	



GT-278 Single Head on Post 2.26m




Variant	Colour	Globe
15236	Beige	1xB22
15237	Black	
15238	Burgundy	
15239	Green	
15241	White	



GT-282 Triple Head on Post 2.4m



Width per model:
Double Head - 640mm
Triple Head - 620mm

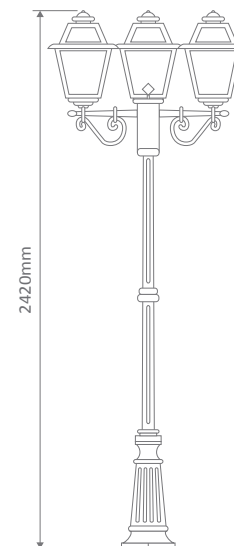

Item No & Variant		Colour	Globe
GT-280	GT-282		
15242	15248	Beige	B22*
15243	15249	Black	
15244	15250	Burgundy	
15245	15251	Green	
15247	15253	White	

*The amount of globes needed will depend on the quantity of heads.




Turin

Turin Series

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.




GT-421 Wall Bracket




Variant	Colour	Globe
15416	Beige	1xB22
15417	Black	
15418	Burgundy	
15419	Green	
15421	White	

GT-422 Wall Bracket




Variant	Colour	Globe
15422	Beige	1xB22
15423	Black	
15424	Burgundy	
15425	Green	
15427	White	

GT-423 Pillar Mount




Variant	Colour	Globe
15428	Beige	1xB22
15429	Black	
15430	Burgundy	
15431	Green	
15433	White	

GT-439 Post Top



Variant	Colour	Globe
15476	Beige	1xB22
15477	Black	
15478	Burgundy	
15479	Green	
15481	White	

GT-420 Pendant



Variant	Colour	Globe
15410	Beige	1xB22
15411	Black	
15412	Burgundy	
15413	Green	
15415	White	




Turin



Turin

GT-424 Single Head on Post 1.32m




Variant	Colour	Globe
15434	Beige	1xB22
15435	Black	
15436	Burgundy	
15437	Green	
15439	White	




Turin

GT-426 Single Head on Post 1.96m




Variant	Colour	Globe
15446	Beige	1xB22
15447	Black	
15448	Burgundy	
15449	Green	
15451	White	

GT-425 Twin Head on Post 1.49m

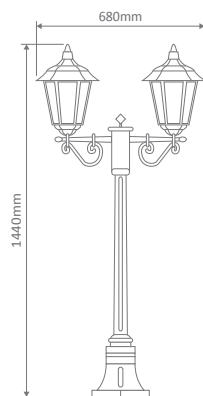

Variant	Colour	Globe
15440	Beige	2xB22
15441	Black	
15442	Burgundy	
15443	Green	
15445	White	

GT-427 Twin Head on Post 2.11m

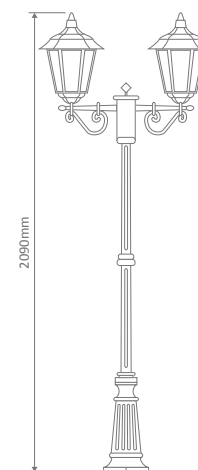


Variant	Colour	Globe
15452	Beige	2xB22
15453	Black	
15454	Burgundy	
15455	Green	
15457	White	



Turin

GT-428 Single Head on Post 2.37m




Variant	Colour	Globe
15458	Beige	1xB22
15459	Black	
15460	Burgundy	
15461	Green	
15463	White	

domuslighting.com.au





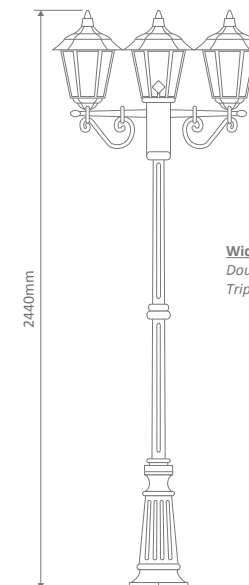


Turin

GT-432 Triple Head on Post 2.4m



Width per model:
Double Head - 680mm
Triple Head - 660mm

Item No & Variant		Colour		Globe
GT-430	GT-432			
15464	15470		Beige	B22*
15465	15471		Black	
15466	15472		Burgundy	
15467	15473		Green	
15469	15475		White	

*The amount of globes needed will depend on the quantity of heads.

domuslighting.com.au



GT-430 Twin Head on Post 2.47m




Turin Large

Turin Large Series


- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.



GT-481 Large Wall Bracket



GT-482 Large Wall Bracket




Variant	Colour	Globe
15482	Beige	1xB22
15483	Black	
15484	Burgundy	
15485	Green	
15487	White	

Variant	Colour	Globe
15488	Beige	1xB22
15489	Black	
15490	Burgundy	
15491	Green	
15493	White	




Turin Large

GT-483 Large Pillar Mount




Variant	Colour	Globe
15494	Beige	1xB22
15495	Black	
15496	Burgundy	
15497	Green	
15499	White	

GT-486 Large Post Top



Variant	Colour	Globe
15506	Beige	1xB22
15507	Black	
15508	Burgundy	
15509	Green	
15511	White	

GT-485 Large Pendant




Variant	Colour	Globe
15500	Beige	1xB22
15501	Black	
15502	Burgundy	
15503	Green	
15505	White	



Turin Large

GT-488 Single Head on Post 2.45m



Variant	Colour	Globe
15512	Beige	1xB22
15513	Black	
15514	Burgundy	
15515	Green	
15517	White	



Accessories

Post Top Adaptors



GTA-140 43mm



GTA-141 50mm



GTA-142 60mm




GTA-95 CTC Bracket




GTA-96 Pillar Mount Base




GTA-832 Base & Adaptor Plate



GTA-72
Monaco Series Diffuser Ring



GTA-94 Thread Adaptor Plate



Item No & Variant								Colour	
GTA-140	GTA-141	GTA-142	GTA-95	GTA-96	GTA-832	GTA-72	GTA-94		
16021	16027	16033	16075	16081	16063	N/A	16069	Beige	
16022	16028	16034	16076	16082	16064	16089	16070	Black	
16023	16029	16035	16077	16083	16065	N/A	16071	Burgundy	
16024	16030	16036	16078	16084	16066	N/A	16072	Green	
16026	16032	16038	16080	16086	16068	N/A	16074	White	




GTA-222 95cm Post




GTA-221 1.57m Post



GTA-220 1.93m Post




GTA-220 (Base)




GTA-221-222 (Base)

Item No & Variant			Colour	
GTA-220	GTA-221	GTA-222		
16039	16045	16051		Beige
16040	16046	16052		Black
16041	16047	16053		Burgundy
16042	16048	16054		Green
16044	16050	16056		White
N/A	N/A	N/A		Clear



GTA-335

Exterior Arm



GTA-652

Monaco Series Diffuser Only



GTA-98

Cap to Suit 60mm Post


Item No & Variant			Colour	
GTA-335	GTA-652	GTA-98		
16057	N/A	N/A		Beige
16058	N/A	16087		Black
16059	N/A	N/A		Burgundy
16060	N/A	N/A		Green
16062	N/A	16088		White
N/A	16098	N/A		Clear



DM Series


- 10W 12V DC Constant Voltage LED Driver.

DM1210




- 30W 12V DC Constant Voltage LED Driver.

DM1230



- 10W 24V DC Constant Voltage LED Driver.

DM2410



Item No.	Variant	Wattage	IP Rating	Voltage
DM1210	20396	10W	20	12V
DM1230	20397	30W		
DM2410	20398	10W		24V

Constant Voltage - wire in parallel




WP-350mA Series

- 350mA Constant Current.

WP350mA-3

WP350mA-10

WP350mA-20




WP-700mA Series

- 700mA Constant Current.

WP700mA-3

WP700mA-10

WP700mA-20



Item No.	Variant	Input Voltage	Output Voltage	Output Current	Wattage	IP Rating
WP350mA/3	20248	200-260V AC (50/60Hz)	7-9V	350mA	2.5 -3W	67
WP350mA/10	20255		26-30V		9-10W	
WP350mA/20	20260		40-57V		14-20W	
WP700mA/3	20393		3-5V	700mA	2-3W	
WP700mA/10	20395		12-15V		8.5-10W	
WP700mA/20	20256		25-30V		17.5-20W	

Constant Current - Wire in Series




WP-12V Series


- 12V DC Constant Voltage.



WP12-10




WP12-15




WP12-60

WP12-30



WP12-100

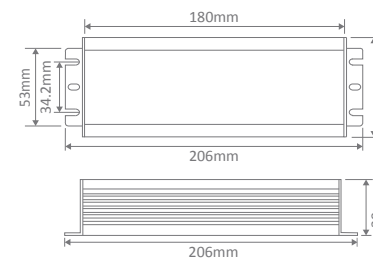

Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP12/10	20198	200-260V (50/60Hz)	12V DC	1-10W	67
WP12/15	20200			1.5-15W	
WP12/30	20201			3-30W	

Constant Voltage - Wire in Parallel

Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP12/60	20202	200-260V (50/60Hz)	12V	6-60W	67
WP12/100	20203			10-100W	

Constant Voltage - Wire in parallel






WP-24V Series


- 24V DC Constant Voltage.



WP12-150

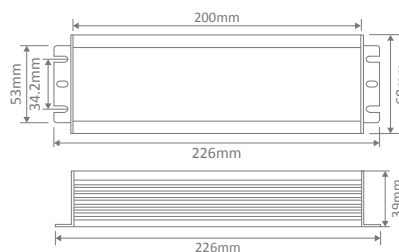


WP24-10




WP24-15

WP12-200

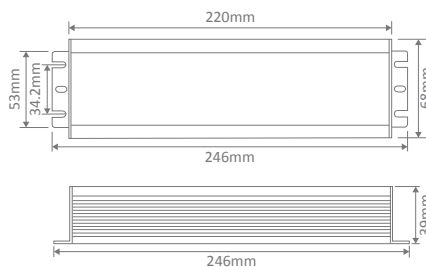

WP12-250

WP24-30



Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP12/150	20204	200-260V (50/60Hz)	12V	15-150W	67
WP12/200	20199			20-200W	
WP12/250	20259			25-250W	


Constant Voltage - Wire in parallel

Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP24/10	20249	200-260V (50/60Hz)	24V	1-10W	67
WP24/15	20250			1.5-15W	
WP24/30	20251			3-30W	


Constant Voltage - Wire in parallel




WP24-60




WP24-150

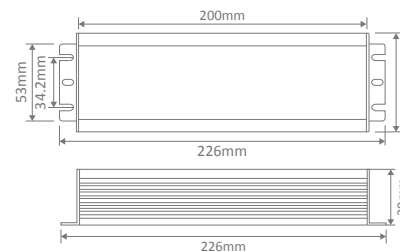

WP24-100

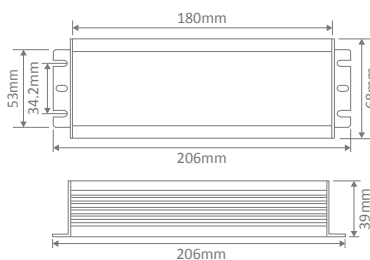

WP24-200

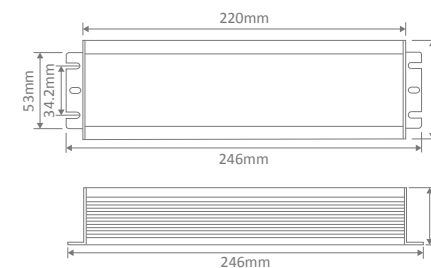

WP24-250

Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP24/60	20252	200-260V	24V	6-60W	67
WP24/100	20253	(50/60Hz)		10-100W	

Constant Voltage - Wire in parallel

Item No.	Variant	Input Voltage	Output Voltage	Output Wattage	IP Rating
WP24/150	20254	200-260V (50/60Hz)	24V	15-150W	67
WP24/200	20257			20-200W	
WP24/250	20258			25-250W	

Constant Voltage - Wire in parallel



WP Slim Series

- DC Constant Voltage.
- Narrow design drivers.



WP12/Slim30



WP12/Slim60



WP12/Slim80



Item No.	Variant	Wattage	IP Rating	Output Voltage
WP12/SLIM30	20195	2-30W	67	12V
WP12/SLIM60	20196	5-60W		
WP12/SLIM80	20180	5-80W		

Constant Voltage - wire in parallel



WP24/Slim30



WP24/Slim60



WP24/Slim80



Item No.	Variant	Wattage	IP Rating	Output Voltage
WP24/SLIM30	20194	2-30W	67	24V
WP24/SLIM60	20197	5-60W		
WP24/SLIM80	20188	5-80W		

Constant Voltage - wire in parallel



1. Definitions

- 1.1 "Domus" means Domus Lighting Pty Ltd, its successors and assigns or any person acting on behalf of and with the authority of Domus Lighting Pty Ltd.
- 1.2 "Customer" means the person/s buying the Goods as specified in any invoice, document or order, and if there is more than one Customer is a reference to each Customer jointly and severally.
- 1.3 "Goods" means all Goods or Services supplied by Domus to the Customer at the Customer's request from time to time (where the context so permits the terms 'Goods' or 'Services' shall be interchangeable for the other).
- 1.4 "Price" means the Price payable (plus any GST where applicable) for the Goods as agreed between Domus and the Customer in accordance with clause 6 below.
- 1.5 "GST" means Goods and Services Tax as defined within the "A New Tax System (Goods and Services Tax) Act 1999".

2. Acceptance

- 2.1 The Customer is taken to have exclusively accepted and is immediately bound, jointly and severally, by these terms and conditions if the Customer places an order for or accepts delivery of the Goods.
- 2.2 These terms and conditions may only be amended with the consent of both parties in writing, and shall prevail to the extent of any inconsistency with any other document or agreement between the Customer and Domus.
- 2.3 Goods are supplied by Domus only on the terms and conditions of trade herein to the exclusion of anything to the contrary in the terms of the Customer's order.

3. Electronic Transactions Act 2000

- 3.1 Electronic signatures shall be deemed to be accepted by either party providing that the parties have complied with Section 9 of the Electronic Transactions Act 2000 or any other applicable provisions of that Act or any Regulations referred to in that Act.

4. Change in Control

- 4.1 The Customer shall give Domus not less than fourteen (14) days prior written notice of any proposed change of ownership of the Customer and/or any other change in the Customer's details (including but not limited to, changes in the Customer's name, address, contact phone or fax number/s, or business practice). The Customer shall be liable for any loss incurred by Domus as a result of the Customer's failure to comply with this clause.

5. Sales Targets and Settlement Rebates

- 5.1 Any agreed sales targets and/or settlement rebates are subject to specific agreed conditions, with all agreements to be documented by Domus and signed by both parties. Rebates shall be granted as per the agreed terms.
- 5.2 Where the Customer fails to adhere to the agreed terms, Domus reserves the right to withdraw, cancel and/or modify the rebate structure.

6. Price and Payment

- 6.1 At Domus' sole discretion, the Price shall be either:
 - (a) as indicated on any invoice provided by Domus to the Customer; or
 - (b) the Price as at the date of delivery of the Goods according to Domus' current price list, with any claims of incorrect pricing to be made within thirty (30) days of delivery; or
 - (c) Domus' quoted price (subject to clause 6.2) which will be valid for the period stated in the quotation or otherwise for a period of thirty (30) days. Domus reserves the right to withdraw or change a quotation without notice prior to acceptance.
- 6.2 Domus reserves the right to change the Price:
 - (a) if a variation to the Goods which are to be supplied is requested (including any applicable plans or specifications); or
 - (b) in the event of increases to Domus in the cost of labour or materials (including, but not limited to, overseas transactions that may increase as a consequence of variations in foreign currency rates of exchange and/or international freight and insurance charges) which are beyond Domus' control.
- 6.3 Variations will be charged for on the basis of Domus' quotation, and will be detailed in writing, and shown as variations on Domus' invoice. The Customer shall be required to respond to any variation submitted by Domus within ten (10) working days. Failure to do so will entitle Domus to add the cost of the variation to the Price. Payment for all variations must be made in full at the time of their completion.
- 6.4 Time for payment for the Goods being of the essence, the Price will be payable by the Customer on the date/s determined by Domus, which may be:
 - (a) on delivery of the Goods;
 - (b) either thirty (30) days or sixty (60) days as per prior arrangement, following the end of the month, in which a statement is emailed or posted to the Customer's address notices;
 - (c) the date specified on any invoice or other form as being the date for payment; or
 - (d) failing any notice to the contrary, the date which is seven (7) days following the date of any invoice given to the Customer by Domus.



- 6.5 Payment may be made by cash, cheque, bank cheque, electronic/on-line banking, credit card (Visa or MasterCard only) a surcharge of up to one and a half percent (1.5%) will apply per transaction on all credit card payments, or by any other method as agreed to between the Customer and Domus.
- 6.6 The Customer shall not be entitled to set off against, or deduct from the Price, any sums owed or claimed to be owed to the Customer by Domus nor to withhold payment of any invoice because part of that invoice is in dispute.
- 6.7 Unless otherwise stated the Price does not include GST. In addition to the Price the Customer must pay to Domus an amount equal to any GST Domus must pay for any supply by Domus under this or any other agreement for the sale of the Goods. The Customer must pay GST, without deduction or set off of any other amounts, at the same time and on the same basis as the Customer pays the Price. In addition, the Customer must pay any other taxes and duties that may be applicable in addition to the Price except where they are expressly included in the Price.

7. Delivery of Goods

- 7.1 Delivery ("Delivery") of the Goods is taken to occur at the time that:
 - (a) the Customer or the Customer's nominated carrier takes possession of the Goods at Domus' address; or
 - (b) Domus (or Domus' nominated carrier) delivers the Goods to the Customer's nominated address even if the Customer is not present at the address.
- 7.2 At Domus' sole discretion, the cost of delivery shall be:
 - (a) all purchase orders over three hundred dollars (\$300) including GST are free into store (FIS) within Australian Capital cities and Domus' nominated Regional centres, excluding NT and WA;
 - (b) all purchase orders under three hundred dollars (\$300) including GST, will incur a minimum delivery/freight charge of twenty dollars (\$20) plus GST.
- 7.3 For all areas outside Australian Capital cities and Domus' nominated Regional centres, Domus shall reserve the right to quote and charge a delivery/freight charge that represents the true cost of freight for the requested purchase order, or the Customer may nominate their own carrier and costs accepted by the Customer.
- 7.4 Any time specified by Domus for Delivery is an estimate only and Domus will not be liable for any loss or damage incurred by the Customer as a result of any delay. However, both parties agree that they shall make every endeavour to enable the Goods to be supplied at the time and place as was arranged between both parties. In the event that Domus is unable to supply the Goods as agreed solely due to any action or inaction of the Customer, then:
 - (a) any change in the date of Delivery will be accommodated to the extent that Domus is able to accommodate it, but in the event the change necessitates any variation under clause 6.2, the extra expenses will be charged to the Customer; and/or
 - (b) Domus shall be entitled to charge a reasonable fee for re-supplying the Goods at a later time and date.
- 7.5 Domus may deliver the Goods in separate instalments. Each separate instalment shall be invoiced and paid in accordance with the provisions in these terms and conditions.
- 7.6 The Customer warrants that any structures to which the Goods are to be affixed are able to withstand the installation thereof, and that any electrical connections (including, but not limited to, meter boxes, main switches, circuit breakers, and electrical cable) are of suitable capacity to handle the Goods once installed.

8. Risk

- 8.1 Risk of damage to or loss of the Goods passes to the Customer on Delivery and the Customer must insure the Goods on or before Delivery.
- 8.2 If any of the Goods are damaged or destroyed following delivery but prior to ownership passing to the Customer, Domus is entitled to receive all insurance proceeds payable for the Goods. The production of these terms and conditions by Domus is sufficient evidence of Domus' rights to receive the insurance proceeds without the need for any person dealing with Domus to make further enquiries.
- 8.3 If the Customer requests Domus to leave Goods outside Domus' premises for collection or to deliver the Goods to an unattended location, then such Goods shall be left at the Customer's sole risk.

9. Specifications

- 9.1 Whilst Domus shall endeavour to provide correct and accurate information in all datasheets, catalogues, brochures, instruction manuals, advertising materials and other documentation, all literature, is expressly illustrative and is by way of a general description of the Goods and Domus shall not be held liable where errors and/or omissions may occur.
- 9.2 The Customer shall be responsible for ensuring that the Goods ordered are suitable for their intended use, as in some instances the Goods are made to order and Domus offers no refund, either partial or fully, in the event of any cancellation by the Customer.
- 9.3 The Customer acknowledges and accepts that the supply of Goods for accepted orders may be subject to availability and if, for any reason, Goods are not, or cease to be, available, Domus reserves the right to substitute comparable products (or components thereof) and vary the Price as per clause 6.2. In all such cases Domus will notify the Customer in advance of any such substitution, and also reserves the right to place the Customer's order on hold until such time as Domus and the Customer agree to such changes.



10. Title

- 10.1 Domus and the Customer agree that ownership of the Goods shall not pass until:
 - (a). the Customer has paid Domus all amounts owing to Domus; and
 - (b). the Customer has met all of its other obligations to Domus.
- 10.2 Receipt by Domus of any form of payment other than cash shall not be deemed to be payment until that form of payment has been honoured, cleared or recognised.
- 10.3 It is further agreed that, until ownership of the Goods passes to the Customer in accordance with clause 10.1:
 - (a). the Customer is only a bailee of the Goods and must return the Goods to Domus on request.
 - (b). the Customer holds the benefit of the Customer's insurance of the Goods on trust for Domus and must pay to Domus the proceeds of any insurance in the event of the Goods being lost, damaged or destroyed.
 - (c). the Customer must not sell, dispose, or otherwise part with possession of the Goods other than in the ordinary course of business and for market value. If the Customer sells, disposes or parts with possession of the Goods then the Customer must hold the proceeds of any such act on trust for Domus and must pay or deliver the proceeds to Domus on demand.
 - (d). the Customer should not convert or process the Goods or intermix them with other goods but if the Customer does so then the Customer holds the resulting product on trust for the benefit of Domus and must sell, dispose of or return the resulting product to Domus as it so directs.
 - (e). the Customer irrevocably authorises Domus to enter any premises where Domus believes the Goods are kept and recover possession of the Goods.
 - (f). Domus may recover possession of any Goods in transit whether or not delivery has occurred.
 - (g). the Customer shall not charge or grant an encumbrance over the Goods nor grant nor otherwise give away any interest in the Goods while they remain the property of Domus.
 - (h). Domus may commence proceedings to recover the Price of the Goods sold notwithstanding that ownership of the Goods has not passed to the Customer.

11. Personal Property Securities Act 2009 ("PPSA")

- 11.1 In this clause financing statement, financing change statement, security agreement, and security interest has the meaning given to it by the PPSA.
- 11.2 Upon assenting to these terms and conditions in writing the Customer acknowledges and agrees that these terms and conditions constitute a security agreement for the purposes of the PPSA and creates a security interest in all Goods and/or collateral (account) – being a monetary obligation of the Customer to Domus for Services – that have previously been supplied and that will be supplied in the future by Domus to the Customer.
- 11.3 The Customer undertakes to:
 - (a). promptly sign any further documents and/or provide any further information (such information to be complete, accurate and up-to-date in all respects) which Domus may reasonably require to;
 - (i). register a financing statement or financing change statement in relation to a security interest on the Personal Property Securities Register;
 - (ii). register any other document required to be registered by the PPSA; or
 - (iii). correct a defect in a statement referred to in clause 11.3(a)(i) or 11.3(a)(ii);
 - (b). indemnify, and upon demand reimburse, Domus for all expenses incurred in registering a financing statement or financing change statement on the Personal Property Securities Register established by the PPSA or releasing any Goods charged thereby;
 - (c). not register a financing change statement in respect of a security interest without the prior written consent of Domus;
 - (d). not register, or permit to be registered, a financing statement or a financing change statement in relation to the Goods and collateral (account) in favour of a third party without the prior written consent of Domus;
 - (e). immediately advise Domus of any material change in its business practices of selling the Goods which would result in a change in the nature of proceeds derived from such sales.
- 11.4 Domus and the Customer agree that sections 96, 115 and 125 of the PPSA do not apply to the security agreement created by these terms and conditions.
- 11.5 The Customer waives their rights to receive notices under sections 95, 118, 121(4), 130, 132(3)(d) and 132(4) of the PPSA.
- 11.6 The Customer waives their rights as a grantor and/or a debtor under sections 142 and 143 of the PPSA.
- 11.7 Unless otherwise agreed to in writing by Domus, the Customer waives their right to receive a verification statement in accordance with section 157 of the PPSA.
- 11.8 The Customer must unconditionally ratify any actions taken by Domus under clauses 11.3 to 11.5.
- 11.9 Subject to any express provisions to the contrary (including those contained in this clause 11) nothing in these terms and conditions is intended to have the effect of contracting out of any of the provisions of the PPSA.

12. Security and Charge

- 12.1 In consideration of Domus agreeing to supply the Goods, the Customer charges all of its rights, title and interest (whether joint or several) in any land, realty or other assets capable of being charged, owned by the Customer either now or in the future, to secure



the performance by the Customer of its obligations under these terms and conditions (including, but not limited to, the payment of any money).

- 12.2 The Customer indemnifies Domus from and against all Domus' costs and disbursements including legal costs on a solicitor and own client basis incurred in exercising Domus' rights under this clause.
- 12.3 The Customer irrevocably appoints Domus and each director of Domus as the Customer's true and lawful attorney/s to perform all necessary acts to give effect to the provisions of this clause 12 including, but not limited to, signing any document on the Customer's behalf.

13. Damaged/Faulty Goods, Warranties and Returns and Claims, Competition and Consumer Act 2010 (CCA)

- 13.1 The Customer must inspect the Goods on delivery and must within seven (7) days of delivery notify Domus in writing of any evident defect/damage, shortage in quantity, or failure to comply with the description or quote. The Customer must notify any other alleged defect in the Goods as soon as reasonably possible after any such defect becomes evident. Upon such notification the Customer must allow Domus to inspect the Goods. A Goods Returned Authority number (GRA) will be issued by Domus upon notification of Goods to be returned and shall accompany the Goods along with all other relevant documentation and a completed Warranty Claim Form.
- 13.2 The conditions applicable to the warranty given by clause 13.1 are as specified below:
 - (a). Damaged/Faulty Goods: Domus, in its absolute discretion, agrees to repair or replace or credit Goods that have been approved by Domus to be defective and in accordance with 13.1 and any instructions issued by Domus. Suitable substitutes will be issued by Domus in the case where the product is discontinued or no longer serviceable;
 - (b). Warranties: no warranties except those implied and which cannot be excluded by law are given by Domus in respect of Goods and Services. Warranty periods vary, subject to the individual product, and negotiated warranty periods may apply to Services. Any product(s) that have been modified shall render all warranties null and void;
 - (c). Shortages: claims for "short deliveries" must be reported to Domus in writing within seven (7) days of delivery of Goods and in accordance with 13.1, no claims for short deliveries will be accepted after this time. The Customer will be responsible insuring that the total number of cartons delivered corresponds exactly with the delivery docket and/or the couriers consignment note;
 - (d). Pricing: claims for "incorrect pricing" must be reported to Domus in writing within fourteen (14) days of delivery of Goods and/or date of invoice. Domus reserves the right to reject any pricing claim submitted after fourteen (14) days of delivery of Goods and/or date of invoice.
 - (e). Goods not Required by the Customer: Domus may in its absolute discretion accept non-defective Goods (excluding specials, project or discontinued Goods) for return in which case Domus may require the Customer to pay handling fees of up to twenty five percent (25%) of the value of the returned Goods plus any freight costs and provide the GRA number and all other relevant documents pertaining to the Goods.
- 13.3 Under applicable State, Territory and Commonwealth Law (including, without limitation the CCA), certain statutory implied guarantees and warranties (including, without limitation the statutory guarantees under the CCA) may be implied into these terms and conditions (Non-Excluded Guarantees).
- 13.4 Except as expressly set out in these terms and conditions or in respect of the Non-Excluded Guarantees, Domus makes no warranties or other representations under these terms and conditions including but not limited to the quality or suitability of the Goods. Domus' liability in respect of these warranties is limited to the fullest extent permitted by law.
- 13.5 If the Customer is a consumer within the meaning of the CCA in respect of any expressed warranties and guarantees, Domus' liability is limited to the extent permitted by section 64A of Schedule 2 and being either for a twelve (12) month, three (3) year or five (5) year period.
- 13.6 If Domus is required to replace the Goods under this clause or the CCA, but is unable to do so, Domus may refund any money the Customer has paid for the Goods.
- 13.7 If the Customer is not a consumer within the meaning of the CCA, Domus' liability for any defect or damage in the Goods is:
 - (a). limited to the value of any express warranty or warranty documentation provided to the Customer by Domus at Domus' sole discretion;
 - (b). limited to any warranty to which Domus is entitled, if Domus did not manufacture the Goods;
 - (c). otherwise negated absolutely.
- 13.8 At no time will a warranty be transferrable. Any warranty offered is made only to the original Customer who must produce the original sales invoice at the point of submitting a warranty claim.
- 13.9 Subject to this clause 13, returns will only be accepted provided that:
 - (a). the Customer has complied with the provisions of clause 13.1; and
 - (b). Domus has agreed that the Goods are defective; and
 - (c). the Customer has obtained a CRA number from Domus; and
 - (d). the Goods are returned within a reasonable time at the Customer's reasonable cost; and
 - (e). the Goods are returned in the condition in which they were delivered and with all packaging material, brochures and instruction material in as new condition as is reasonably possible in the circumstances.
- 13.10 Not with standing clauses 13.1 to 13.8 but subject to the CCA, Domus shall not be liable for any defect or damage which may be caused or partly caused by or arise as a result of:



- (a). the Customer failing to properly maintain or store any Goods;
 - (b). the Customer using the Goods for any purpose other than that for which they were designed;
 - (c). the Customer continuing the use of any Goods after any defect became apparent or should have become apparent to a reasonably prudent operator or user;
 - (d). the Customer failing to follow any instructions or guidelines provided by Domus;
 - (e). fair wear and tear, any accident, or act of God.
- 13.11 Not with standing anything contained in this clause if Domus is required by a law to accept a return then Domus will only accept a return on the conditions imposed by that law.

14. Third Party Claims

- 14.1 In the instance that Domus' Goods have been installed and then become defective, Domus shall not be responsible for any electrical costs involved. The defective Goods shall be returned to Domus in accordance with 13.1.
- 14.2 In the instance that Domus' Goods are agreed by Domus as defective on a commercial job, Domus reserves the right either reject or to use the following procedures to remedy and rectify the situation. Domus may:
- (a). use Domus' qualified staff and resources; or
 - (b). obtain a quotation for the remedial/rectification work to be completed on Domus' behalf, with the quotation to be signed off by Domus' management prior to commencement of the said work and a work order being issued.
- 14.3 Failure of the Customer to all the procedure in 14.2 to occur may result in Domus not accepting any back charge claim made by the Customer.

15. Intellectual Property

- 15.1 Where Domus has designed, drawn or developed Goods for the Customer, then the copyright in any designs and drawings and documents shall remain the property of Domus. Under no circumstances may such designs, drawings and documents be used without the express written approval of Domus.
- 15.2 The Customer warrants that all designs, specifications or instructions given to Domus will not cause Domus to infringe any patent, registered design or trademark in the execution of the Customer's order and the Customer agrees to indemnify Domus against any action taken by a third party against Domus in respect of any such infringement.

16. Protection of Reputation

- 16.1 Any misuse, misrepresentation or any other action that negatively impacts Domus' brand (including but not limited to online sales and/or marketing campaigns) which is deemed to damage and/or tarnish the reputation of Domus' brand, may result in Domus mitigating that damage by refusing the Customer the right to continue to represent Domus.

17. Default and Consequences of Default

- 17.1 Interest on overdue invoices may accrue daily from the date when payment becomes due, until the date of payment, at a rate of two and a half percent (2.5%) per calendar month (and at Domus' sole discretion such interest shall compound monthly at such a rate) after as well as before any judgment.
- 17.2 If the Customer owes Domus any money, the Customer shall indemnify Domus from and against all costs and disbursements incurred by Domus in recovering the debt (including, but not limited to, internal administration fees, legal costs on a solicitor and own client basis, Domus' contract default fee, and bank dishonour fees).
- 17.3 Further to any other rights or remedies Domus may have under this contract, if a Customer has made payment to Domus, and the transaction is subsequently reversed, the Customer shall be liable for the amount of the reversed transaction, in addition to any further costs incurred by Domus under this clause 17 where it can be proven that such reversal is found to be illegal, fraudulent or in contravention to the Customer's obligations under this agreement.
- 17.4 Without prejudice to Domus' other remedies at law Domus shall be entitled to cancel all or any part of any order of the Customer which remains unfulfilled and all amounts owing to Domus shall, whether or not due for payment, become immediately payable if:
- (a). any money payable to Domus becomes overdue, or in Domus' opinion the Customer will be unable to make a payment when it falls due;
 - (b). the Customer has exceeded any applicable credit limit provided by Domus;
 - (c). the Customer becomes insolvent, convenes a meeting with its creditors or proposes or enters into an arrangement with creditors, or makes an assignment for the benefit of its creditors; or
 - (d). a receiver, manager, liquidator (provisional or otherwise) or similar person is appointed in respect of the Customer or any asset of the Customer.

18. Right of Supply and Cancellation

- 18.1 Without prejudice to any other remedies Domus may have, if at any time the Customer is in breach of any obligation (including those relating to payment) under these terms and conditions Domus may suspend or terminate the supply of Goods to the Customer. Domus will not be liable to the Customer for any loss or damage the Customer suffers because Domus has exercised its rights under this clause.



- 18.2 Domus may cancel any contract to which these terms and conditions apply or cancel delivery of Goods at any time before the Goods are delivered by giving written notice to the Customer. On giving such notice Domus shall repay to the Customer any money paid by the Customer for the Goods. Domus shall not be liable for any loss or damage whatsoever arising from such cancellation.
- 18.3 In the event that the Customer cancels delivery of Goods the Customer shall be liable for any and all loss incurred (whether direct or indirect) by Domus as a direct result of the cancellation (including, but not limited to, any loss of profits).
- 18.4 Domus reserves the right to reject any cancellation of order for Goods (whether partially or wholly);
- (a). Where the Goods supplied and/or to be supplied have been specially ordered by the Customer; or
 - (b). made to the Customer's specifications; or
 - (c). for non-stock items.

19. Privacy Act 1988

- 19.1 The Customer agrees for Domus to obtain from a credit reporting body (CRB) a credit report containing personal credit information (e.g. name, address, D.O.B, occupation, previous credit applications, credit history) about the Customer in relation to credit provided by Domus.
- 19.2 The Customer agrees that Domus may exchange information about the Customer with those credit providers and with related body corporates for the following purposes:
- (a). to assess an application by the Customer; and/or
 - (b). to notify other credit providers of a default by the Customer; and/or
 - (c). to exchange information with other credit providers as to the status of this credit account, where the Customer is in default with other credit providers; and/or
 - (d). to assess the creditworthiness of the Customer including the Customer's repayment history in the preceding two (2) years.
- 19.3 The Customer consents to Domus being given a consumer credit report to collect overdue payment on commercial credit.
- 19.4 The Customer agrees that personal credit information provided may be used and retained by Domus for the following purposes (and for other agreed purposes or required by):
- (a). the provision of Goods; and/or
 - (b). analysing, verifying and/or checking the Customer's credit, payment and/or status in relation to the provision of Goods; and/or
 - (c). processing of any payment instructions, direct debit facilities and/or credit facilities requested by the Customer; and/or
 - (d). enabling the collection of amounts outstanding in relation to the Goods.
- 19.5 Domus may give information about the Customer to a CRB for the following purposes:
- (a). to obtain a consumer credit report;
 - (b). allow the CRB to create or maintain a credit information file about the Customer including credit history.
- 19.6 The information given to the CRB may include:
- (a). personal information as outlined in 19.1 above;
 - (b). name of the credit provider and that Domus is a current credit provider to the Customer;
 - (c). whether the credit provider is a licensee;
 - (d). type of consumer credit;
 - (e). details concerning the Customer's application for credit or commercial credit (e.g. date of commencement/termination of the credit account and the amount requested);
 - (f). advice of consumer credit defaults, overdue accounts, loan repayments or outstanding monies which are overdue by more than sixty (60) days and for which written notice for request of payment has been made and debt recovery action commenced or alternatively that the Customer no longer has any overdue accounts and Domus has been paid or otherwise discharged and all details surrounding that discharge (e.g. dates of payments);
 - (g). information that, in the opinion of Domus, the Customer has committed a serious credit infringement;
 - (h). advice that the amount of the Customer's overdue payment is equal to or more than one hundred and fifty dollars (\$150).
- 19.7 The Customer shall have the right to request (by e-mail) from Domus:
- (a). a copy of the information about the Customer retained by Domus and the right to request that Domus correct any incorrect information; and
 - (b). that Domus does not disclose any personal information about the Customer for the purpose of direct marketing.
- 19.8 Domus will destroy personal information upon the Customer's request (by e-mail) or if it is no longer required unless it is required in order to fulfil the obligations of this agreement or is required to be maintained and/or stored in accordance with the law.
- 19.9 The Customer can make a privacy complaint by contacting Domus via e-mail. Domus will respond to that complaint within seven (7) days of receipt and will take all reasonable steps to make a decision as to the complaint within thirty (30) days of receipt of the complaint. In the event that the Customer is not satisfied with the resolution provided, the Customer can make a complaint to the Information Commissioner at www.oaic.gov.au.

20. Service of Notices

- 20.1 Any written notice given under this contract shall be deemed to have been given and received:
- (a). by handing the notice to the other party, in person;
 - (b). by leaving it at the address of the other party as stated in this contract;



- (c). by sending it by registered post to the address of the other party as stated in this contract;
 - (d). if sent by facsimile transmission to the fax number of the other party as stated in this contract (if any), on receipt of confirmation of the transmission;
 - (e). if sent by email to the other party's last known email address.
- 20.2 Any notice that is posted shall be deemed to have been served, unless the contrary is shown, at the time when by the ordinary course of post, the notice would have been delivered.
- 21. Building and Construction Industry Security of Payments Act 1999**
- 21.1 At Domus' sole discretion, if there are any disputes or claims for unpaid Goods and/or Services then the provisions of the Building and Construction Industry Security of Payments Act 1999 may apply.
- 21.2 Nothing in this agreement is intended to have the effect of contracting out of any applicable provisions of the Building and Construction Industry Security of Payments Act 1999 of New South Wales, except to the extent permitted by the Act where applicable.
- 22. General**
- 22.1 The failure by either party to enforce any provision of these terms and conditions shall not be treated as a waiver of that provision, nor shall it affect that party's right to subsequently enforce that provision. If any provision of these terms and conditions shall be invalid, void, illegal or unenforceable the validity, existence, legality and enforceability of the remaining provisions shall not be affected, prejudiced or impaired.
- 22.2 These terms and conditions and any contract to which they apply shall be governed by the laws of New South Wales in which Domus has its principal place of business, and are subject to the jurisdiction of the Bankstown Local Court, New South Wales.
- 22.3 Subject to clause 13, Domus shall be under no liability whatsoever to the Customer for any indirect and/or consequential loss and/or expense (including loss of profit) suffered by the Customer arising out of a breach by Domus of these terms and conditions (alternatively Domus' liability shall be limited to damages which under no circumstances shall exceed the Price of the Goods).
- 22.4 The Customer agrees that Domus may amend these terms and conditions by notifying the Customer in writing. These changes shall be deemed to take effect from the date on which the Customer accepts such changes, or otherwise at such time as the Customer makes a further request for Domus to provide Goods to the Customer.
- 22.5 Neither party shall be liable for any default due to any act of God, war, terrorism, strike, lock-out, industrial action, fire, flood, storm or other event beyond the reasonable control of either party.
- 22.6 Both parties warrant that they have the power to enter into this agreement and have obtained all necessary authorisations to allow them to do so, they are not insolvent and that this agreement creates binding and valid legal obligations on them.



DOMUS[®]

29-31 Richland Street, Kingsgrove. NSW 2208.

Ph: (02) 9554 9600 | domuslighting.com.au | enquiries@domuslighting.com.au