

Installation Manual

PANEL-303


Order Code	Product Code	Description
19303	PANEL-303-SLR-W	18W LED PANEL, silver finish - White 6000K
19304	PANEL-303-SLR-NW	18W LED PANEL, silver finish - Neutral white 4000K
19305	PANEL-303-SLR-WW	18W LED PANEL, silver finish - Warm white 3000K

Thank you for purchasing your new LED PANEL-303, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

Voltage:	240V AC	Lumen (±5%):	WW 3000K-1050lm NW 4000K-1100lm W 6000K-1150lm	Dimmable:	YES*
Power:	18W	CCT:	3000K - 4000K - 6000K	CRI:	≥70
IP Rating:	44	Lifespan:	50,000hrs		
Mounting Type:	Recessed into standard grid ceiling or via optional plaster trim kit for plaster board ceilings or via optional wire suspended or surface mounted kit.				

* Tested on the Domus dimmer series. May work on other but not tested.

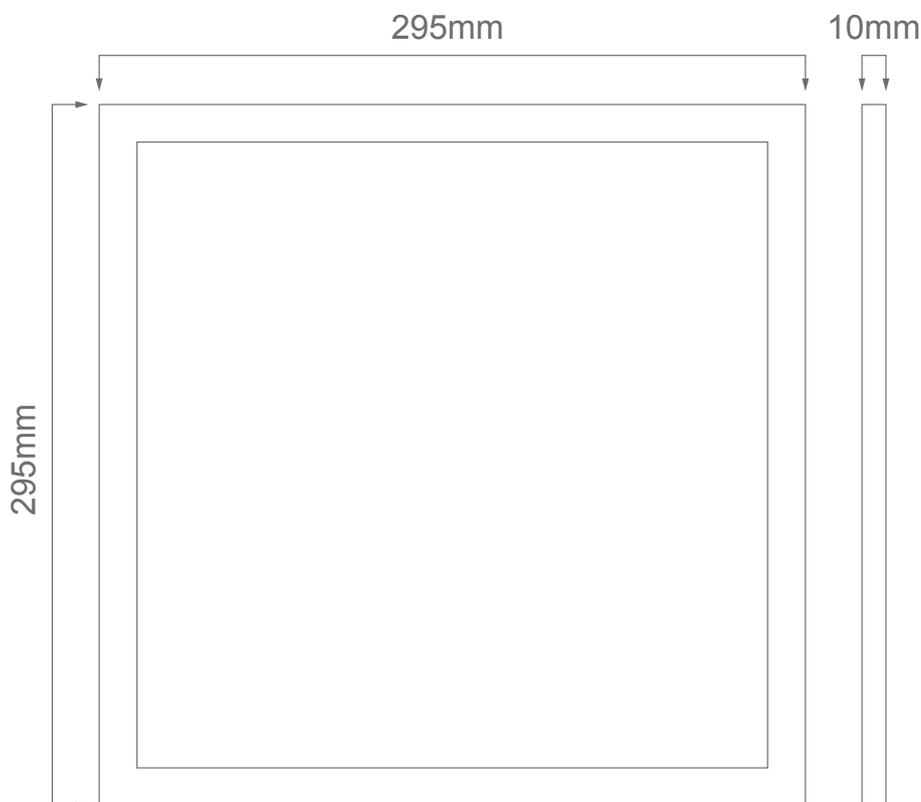

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas


Installation Manual

Recessed into ceiling


1. Remove ceiling plaster slap.




2. Connect power supply.



3. Fix the panel light into the right place.




4. Stabilize the panel.




Suspending



1. A. Fix the anchor into target place on the ceiling.
B. Fix the installation mount on the ceiling with plastic anchor.




2. Hang the panel to ceiling with suspended installation kits.




3. Adjust the length of steel wire. Connect the power supply.

Surface Mounted


1. Open a suitable size hole in the ceiling.




2. Put the plaster recessed frame into the hole.




3. Fix the plaster recessed frame with the 4pcs clips.



4. Connect power supply with the LED panel light.




5. Put the LED panel light into the plaster recessed frame.




Surface mounted


1. Fix the frame on the ceiling with screw




2. Pull down the side frame




3. Push the panel into the frame, connect the driver



4. Install the side frame



5. Turn on the power switch, finish the installation.



Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas