

STRIP-60

Flexible LED Strip






















Description

Introducing STRIP-60 LED strip lighting system. STRIP-60 offers new possibilities in the way we illuminate areas and surfaces. The secret lies in its thin and flexible PCB, which allows for long and linear lengths to be preformed with ease. With added advantages of low wattage and uniform lighting the STRIP-60 opens the area for many design concepts to become reality.

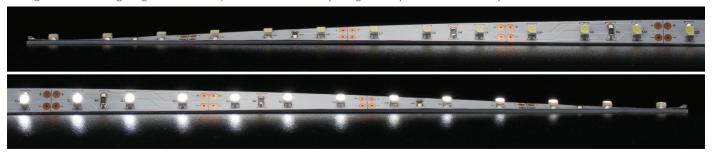

Specification Features

Colours: 7 colour options available

Light Source: 3528 SMD LED

LED Type: Epistar (Taiwan)

Colour Temperature (K): 3200K, 4000K, 6500K

Colour Rendering Index: ≥83

Colours: (wave length) (B) 465nm, (G) 525nm,

(R) 625nm, (O) 600nm

Number of LED per mtr: 60

Wattage Per MTR (W): 4.8W

Input Voltage (VDC): 12VDC

Beam angle (o): 1200

Wiring: Parallel

IP Rating: IP20

Cutting Increments/Sections: 50mm (groups of 3 LED)
Requires: 12VDC constant voltage driver
Dimmable: Yes* DALI, 0-10V, DMX-512, RF

IES files: Yes**


Mounting: Optional aluminium mounting

profile***

- * For dimming options please refer to the controller section for further details.
- ** Available upon request.
- *** Mounting profile optional (not required)

Order Info






20010

Colour Temp:

Order Code:







Colour Temp: 3200K Order Code: 20011 Product Code: STRIP-60-32K Lumens/m: 420 lm/m



Colour Temp: 625nm Order Code: 20014 Product Code: STRIP-60-RED Lumens/m: 126 lm/m



Colour Temp: 525nm Order Code: 20013

Product Code: STRIP-60-GREEN Lumens/m: 234 lm/m




Colour Temp: 465nm Order Code: 20012 Product Code: STRIP-60-BLUE Lumens/m: 90 lm/m



Colour Temp: 600nm Order Code: 20015

Product Code: STRIP-60-ORANGE

Lumens/m: 48 lm/m



Diagrams / Additional

