

Blaze-Pro-200

Floodlight F&P




Description

The BLAZE-PRO Series of LED Floodlights offer a sleek and stylish design, as well as an array of specialised features such as improved condensation prevention technology along with helping to reduce stock inventory. Featuring an aluminium fascia design with frosted glass lens to soften glare, IP66 rating and a unique anti-condensation breathing valve which stops unwanted condensation build-up behind the glass lens. The Multi-wattage selector switch offers the flexibility of selecting the right light output for the application within the same fitting. The tri-colour selector switch also offers the convenience of choosing between a 3000K Warm White, 4000K Neutral White or 5500K White colour temperature options. All models feature a Sensor Adaptor Interface to install the optional BLAZE-PRO-SENSOR. The optional sensor is a Plug-N-Play accessory that instantly converts the BLAZE-PRO floodlights into LED floodlights with sensor models. Combination sensor allows for motion activation and PE Cell for automatic dusk-to-dawn space operation. Complete with 1.5M flex and plug, as well as all angle installation bracket for ease of installation. Ideal for BBQ areas, outdoor entertaining areas, and backyard lighting. Available in Black and White colour options. Backed by a 3 Year Replacement Warranty.


Specification Features

Input Voltage:	240V
Power:	100W/150W/200W
IP rating:	IP66
Lumens:	Warm White 3000K - 11840lm, 17060lm, 21970lm Neutral White 4000K - 12780lm, 18720lm, 24380lm White 5500K - 12720lm, 18200lm, 23470lm
LED type:	SMD
CCT:	3000K - 4000K - 5500K
Luminous Efficacy:	110lm/W
CRI:	≥70
Beam angle:	120°
Dimmable:	No
Lifespan:	20,000 hrs
Driver:	DOB (driver on board)
Operating Temperature:	-40° C ~+ 45° C
Surge Protection:	4.5KV
Sensor:	Built-in Sensor Adaptor Interface
Cable:	1.5M flex and plug Frosted Glass Anti-Condensation Breathing Valve

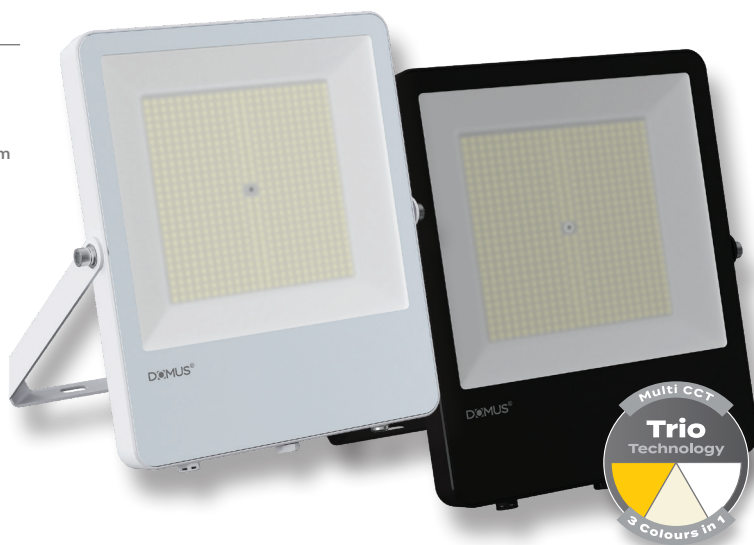

Remote Control

Diagrams / Additional

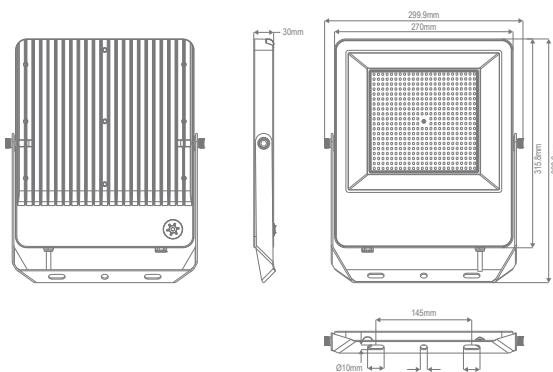

Sensor Features (see Sensor Data Sheet)

Voltage and current:	5V DC, 10mA
Sensing distance:	2-8M
Detection Angle:	120°
Sensitivity:	25%, 50%, 75%, 100%
Holding Time:	10s, 30s, 60s, 90s, 3min, 6min, 12min, 15min
Remote Control:	0-8M
Lux Level:	20Lux, 50Lux, 100Lux
IP Rating:	IP65
Operating Temperature:	-30°C - 40°C
Storage Temperature:	-30°C - 70°C
Installation Height:	1.8-4M
Remote Control Distance:	0-8M

Item No.	Variant		CCT
	Blk	Wht	
BLAZE-PRO-200	19920	19921	TRIO
BLAZE-PRO-SENSOR	19913	19914	N/A
BLAZE-PRO-BKT	19923	N/A	N/A