


BLAZE-PRO-MARINE-24V Series


Specifications

	50W	100W	
Power:	20/30/50W	100W	
CCT:	3000K/4000K/5500K	3000K/4000K/5500K	
Lumen (±5%):	5148/5846/5387lm	11490/12194/11666lm	
Net Weight:	0.72kg	1.28kg	
Max Projected Area:	0.020m ²	0.045m ²	
Dimmable:	No	IP Rating:	IP66
Input Voltage:	24V	Beam Angle:	120°
CRI:	≥70	Lifespan:	20,000hrs
CCT (Switchable):	3000K- 4000K-5500K	Power Factor:	≥1.0
Operating Temperature:	-40°C~+45°C		
Warning: Low Voltage Model – 24V DC Constant Voltage LED Driver Required			


CCT and Power selectable by DIP switch



Use Allen key (5mm) to unscrew the dip switch CCT and power selectable waterproof cover.

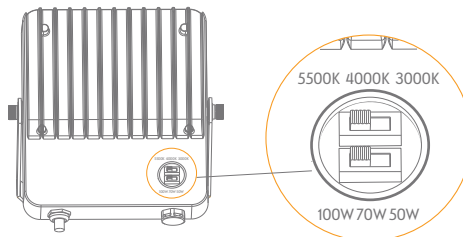

Toggle the switch to the desired colour temperature and power. (Please note don't operate the switch while power is on.)



Use Allen key (5mm) to tighten screw on the waterproof ring and cover.

Note:

- The lamp must be installed by professional electrician
- Ensure the power supply is switched off before fitting this product

- Do not touch the lamp when in use
- Keep away from hot steam and corrosive gas