





Escape Emergency Systems offers a range of innovative Emergency lighting products designed specifically for the Australian market. With a focus on ease of installation, as well as creative features, this collection continues to evolve with the addition of products of high demand, to accessories that provide solutions to the most complex of installations.



The use of quality components, and a focus on reliability has been the priority, with an assurance of full compliance to the relevant standards. Escape Emergency Systems offer a durable Warranty policy for peace of mind.

The list of completed projects using the Escape Emergency Systems range are extensive, from commercial carpark installations to office fit outs, to council parklands as well as transport terminals.

For further information, please contact our Sales Team at Domus, for assistance with your next emergency lighting project.

Emergency Light Series

Hydro Series



Emergency Light Series

Hydro-Series

Input Voltage:	240V AC
Lumens:	130lm/W High output dedicated LED
Wattage:	Half power switch on the driver which decreases the lumen output by 50%
CRI:	≥80
Beam Angle (°)	120°
Emergency:	Maintained/Non-Maintained
Battery:	LiFePO4 (Charge Time 24hrs)
Cover:	Opal diffuser with even light output
Terminal:	Large Terminal, PA16
Inclusion:	S/Steel clips fitted with poly carb clips in the box as an option, pre-drilled side cable entry with rubber seal, Finger holes for easy removal of gear tray when installing, good quality polycarbonate material (not cheap recyclable material).
Options:	Optional Internal Microwave Sensor options available – ON/OFF and DIMMABLE Internal Sensor available. Remote control required for sensor adjustment. One remote control will operate unlimited sensors. Remote control sold separately. DALI and TRIAC options available.
Warranty:	5 Year Warranty/3 Year Warranty on Battery
Compliance:	Fully Compliant to AS/NZS2293.3

Accessories (Sold Separately)



Item No.	Variants
SENSOR-INT-01-ON-OFF	66090




Item No.	Variants
SENSOR-INT-01-DIM	66091

Note: One remote control will operate unlimited sensors.

Item No.	Variants		Wattage	IP Rating	CCT	Non-Dim	ON/OFF Sensor	DIM Sensor	Lumen Output				
	Emergency	Standard							Warm White 3000K	Neutral White 4000K	White 5000K		
HYDRO-60	66020	66012	7.5W/15W	IP65	TRIO	●	-	-	950lm/1850lm	980lm/1900lm	950lm/1850lm		
	66030	66028				-	●	-					
	66031	66029				-	-	●					
HYDRO-120	66021	66017	15W/30W			IP65	TRIO	●	-	-	2350lm/4050lm	2400lm/4250lm	2400lm/4150lm
	66022	66025						-	●	-			
	66023	66026						-	-	●			

Emergency Light Series

Park Diffuser Series

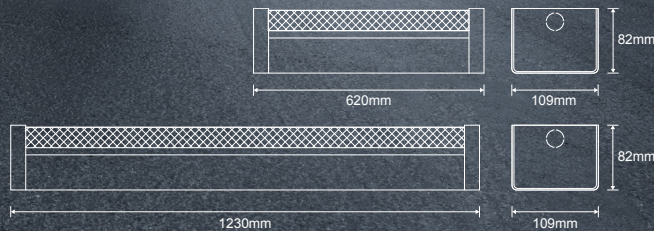

Emergency Light Series

Park Diffuser Series

Input Voltage:	240V AC
Lumens:	130lm/W High output dedicated LED
Wattage:	Half power switch on the driver which decreases the lumen output by 50%
CRI:	≥80
Beam Angle (°)	120°
Emergency:	Maintained/Non-Maintained
Battery:	LiFePO4 (Charge Time 24hrs)
Cover:	Prismatic diffuser with even light output
Terminal:	Large Terminal, PA16
Feature:	20mm Knockouts for conduit or cable glands.
Options:	Optional Internal Microwave Sensor options available – ON/OFF and DIMMABLE Internal Sensor available. Remote control required for sensor adjustment. One remote control will operate unlimited sensors. Remote control sold separately. DALI and TRIAC options available.
Warranty:	5 Year Warranty/3 Year Warranty on Battery
Compliance:	Fully Compliant to AS/NZS2293.3

Accessories (Sold Separately)



Item No.	Variants
SENSOR-INT-01-ON-OFF	66090






Item No.	Variants
SENSOR-INT-01-DIM	66091

Note: One remote control will operate unlimited sensors.

Item No.	Variants		Wattage	IP Rating	CCT	Non-Dim	ON/OFF Sensor	DIM Sensor	Lumen Output				
	Emergency	Standard							Warm White 3000K	Neutral White 4000K	White 5000K		
PARK-60-DIFF	66070	66050	7.5W/15W	IP20	TRIO	●	-	-	950lm/1800lm	1000lm/1950lm	1000lm/1850lm		
	66071	66051				-	●	-					
	66072	66052				-	-	●					
PARK-120-DIFF	66073	66053	15W/30W			IP20	TRIO	●	-	-	2050lm/3850lm	2100lm/4050lm	2050lm/3900lm
	66074	66054						-	●	-			
	66075	66055						-	-	●			

Emergency Light Series

Park Wire Guard Series

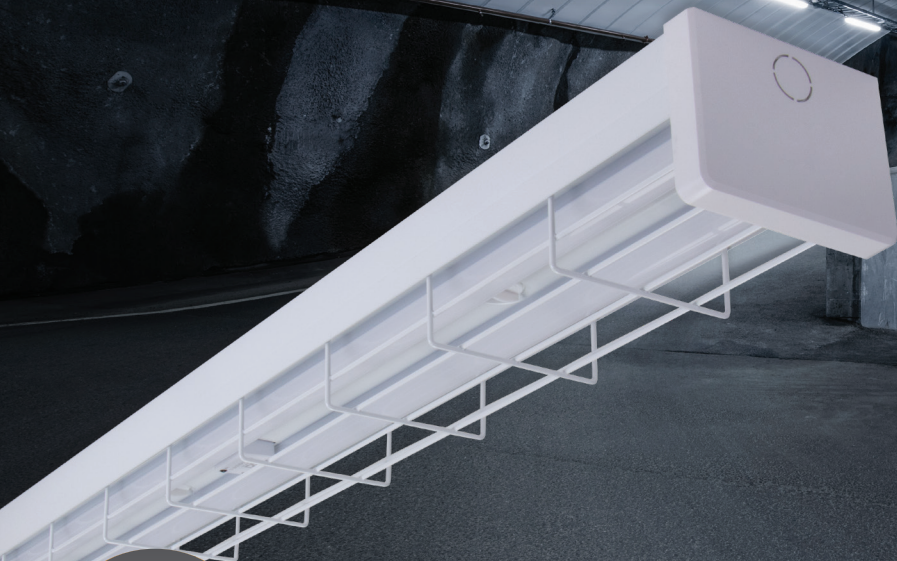

Emergency Light Series

Park Wire Guard Series

Input Voltage:	240V AC
Lumens:	130lm/W High output dedicated LED
Wattage:	Half power switch on the driver which decreases the lumen output by 50%
CRI:	≥80
Beam Angle (°)	120°
Emergency:	Maintained/Non-Maintained
Battery:	LiFePO4 (Charge Time 24hrs)
Cover:	Wire Guard with even light output
Terminal:	Large Terminal, PA16
Feature:	20mm Knockouts for conduit or cable glands.
Options:	Optional Internal Microwave Sensor options available – ON/OFF and DIMMABLE Internal Sensor available. Remote control required for sensor adjustment. One remote control will operate unlimited sensors. Remote control sold separately. DALI and TRIAC options available.
Warranty:	5 Year Warranty/3 Year Warranty on Battery
Compliance:	Fully Compliant to AS/NZS2293.3

Accessories (Sold Separately)



Item No.	Variants
SENSOR-INT-01-ON-OFF	66090





Item No.	Variants
SENSOR-INT-01-DIM	66091

Note: One remote control will operate unlimited sensors.

Item No.	Variants		Wattage	IP Rating	CCT	Non-Dim	ON/OFF Sensor	DIM Sensor	Lumen Output				
	Emergency	Standard							Warm White 3000K	Neutral White 4000K	White 5000K		
PARK-60-WG	66080	66060	7.5W/15W	IP20	TRIO	●	-	-	850lm/1580lm	900lm/1700lm	900lm/1650lm		
	66081	66061				-	●	-					
	66082	66062				-	-	●					
PARK-120-WG	66083	66063	15W/30W			IP20	TRIO	●	-	-	1800lm/3400lm	1800lm/3550lm	1800lm/3450lm
	66084	66064						-	●	-			
	66085	66065						-	-	●			

Emergency Light Series

Accessories (Sold Separately)

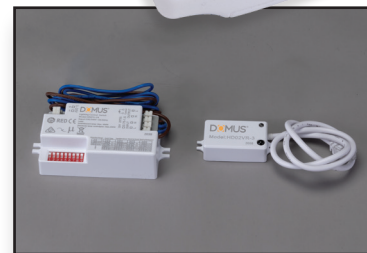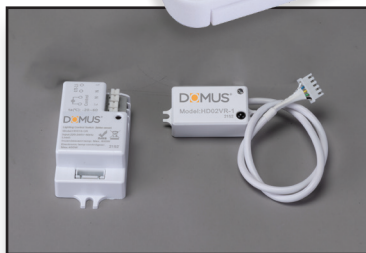

Note: One remote control will operate unlimited sensors.

Emergency Light Series



Internal Sensor ON/OFF

Input Voltage:	240V AC
IP Rating:	IP20
Rated Load:	400W LED
Detection Range:	360°
Detection Distance:	Max 2-6m (<24°C)
Installation Height:	2.5-6m
Time Delay	5sec, 1min, 5min, 10min
Lux Adjustable:	2 lux, 10 lux, 50 lux, disable
Working Temperature:	-20°C~+60°C
Size:	65x36x23mm & 41x24x14mm
Features:	Detection Area setting 50%/100%, manual override to bypass microwave sensor
Remote Control	Remote control needed to adjust settings to ON/OFF Sensor (66090)
Warranty:	5 Years
Compliance:	Fully Compliant to AS/NZS2293.3

Internal Sensor DIM

Input Voltage:	240V AC
IP Rating:	IP20
Rated Load:	400W LED
Detection Range:	360°
Detection Distance:	Max 2-6m (<24°C)
Installation Height:	2.5-6m
Time Delay	5sec, 30sec, 1min, 3min, 5min, 10min, 20min, 30min
Stand By Period:	0sec, 10sec, 30sec, 1min, 5min, 10min, 30min, + continuous
Lux Adjustable:	2 lux, 10 lux, 30 lux, 50 lux, 80lux, 120 lux, disable
Working Temperature:	-20°C~+60°C
Size:	75x42x23mm & 41x24x14mm
Features:	Detection Area setting 50%/70%/100%, manual override to bypass microwave sensor
Remote Control	Remote control needed to adjust settings to DIM Sensor (66091)
Warranty:	5 Years
Compliance:	Fully Compliant to AS/NZS2293.3

Item No.	Variants
SENSOR-INT-01-REM	66090

Item No.	Variants
SENSOR-INT-01-REM	66091

Emergency Light Series

Bolt-Series



Up To
100
Lumens Per Watt


Variable Wattage

AS/NZS2293.3
Compliance

Replacement
5yr
Warranty

IK Rating
08

IP Rating
44



Emergency Light Series





Bolt-Series

Input Voltage:	240V AC
LED Type:	SMD
CCT:	3000K-4000K-5700K (Switchable)
CRI:	≥80
Beam Angle (°)	120°
Lifespan (hrs)	40,000hrs
Installation:	Surface Mounted or Suspended
Battery:	LiFePO4 Battery
Battery Capacity:	1500 mAh at 0.2 CmA
Emergency	Sustained
Rated Duration:	120min
Classification:	C0: D50, C90: D32
Wide Body:	130mm (BOLT-EM-60-TRIO ONLY)
Warranty:	3 Year Warranty/1 Year Battery
Compliance:	Fully Compliant to AS/NZS2293.3

Item No.	Variants		Wattage	IP Rating	CCT	Non-Dim	ON/OFF Sensor	DIM Sensor	Lumen Output		
	Emergency	Standard							Warm White 3000K	Neutral White 4000K	White 5700K
BOLT-60	66007	66000	10W/20W	IP44	TRIO	•	-	-	900lm/1800lm	1000lm/2000lm	1000lm/2000lm
BOLT-120	66006	66003	21W/42W			•	-	-	900lm/3600lm	1000lm/4000lm	1000lm/4000lm

Emergency Light Series

Impact Series



Emergency Light Series

Impact Series

Input Voltage:	240V AC
IK Rating:	IK10
LED Type:	SMD
CCT:	3000K - 4000K - 5000K
CRI:	≥80
Beam Angle (°):	120°
Dimmable:	No
Lifespan (hrs)	50,000hrs
Installation:	Surface Mounted or Suspended
Warranty:	5 Year Warranty
Compliance:	Fully Compliant to AS/NZS2293.3

Waterproof Gland



Item No.	Variants Standard	Wattage	IP Rating	CCT	Non-Dim	ON/OFF Sensor	DIM Sensor	Lumen Output		
								Warm White 3000K	Neutral White 4000K	White 5000K
IMPACT-60	66115	10W/20W	IP66	TRIO	●	-	-	1100/2200lm	1200/2400lm	1200/2400lm
IMPACT-120	66116	20W/40W			●	-	-	2400/4800lm	2500/5000lm	2500/5000lm

Emergency Light Series



Evac Recessed Series



Evac SM Series




ESCAPE
Emergency Systems



Emergency Light Series

Evac Recessed Series


Input Voltage:	240V AC
Wattage:	3.5W Power Consumption
CCT:	4500K
Emergency:	Non- Maintained
Classification:	D63
Battery:	LiFePO4 (Charge Time 24hrs)
Features:	Adjustable dish 95/145mm, depth 34mm, Overcharge & Discharge protection, Polarity reversal protection for battery.
Warranty:	4 Year Warranty Including battery.
Compliance:	Fully Compliant to AS/NZS2293.3

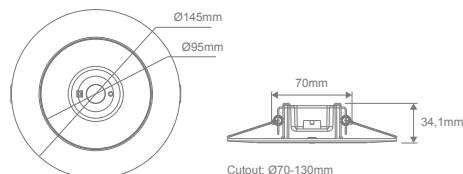

Item No.	Variants	Wattage	Classification	CCT
EVAC-REC-WHT	66040	3.5W	D63	4500K
EVAC-REC-BLK	66041			

Evac SM Series

Input Voltage:	240V AC
Wattage:	3.5W Power Consumption
CCT:	4500K
Emergency:	Non- Maintained
Classification:	D63
Battery:	LiFePO4 (Charge Time 24hrs)
Features:	180x180x52mm pressed steel, Overcharge & discharge protection, Polarity reversal protection for battery.
Warranty:	4 Year Warranty Including battery.
Compliance:	Fully Compliant to AS/NZS2293.3

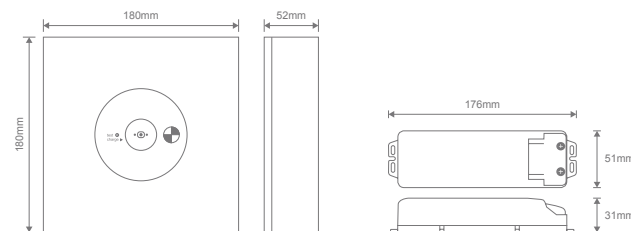

Item No.	Variants	Wattage	Classification	CCT
EVAC-SM-WHT	66044	3.5W	D63	4500K
EVAC-SM-BLK	66045			

Emergency Light Series

Trak-3-EM-D40

Replacement
(4yr)
Warranty

AS/NZS2293.3
Compliance

Classification
D40

IP Rating
(20)

Ultra Slim

Overcharge/Discharge
Protection

LiFePO4
Li-Ion Battery



Evac-D40-Mini

Replacement
(4yr)
Warranty

AS/NZS2293.3
Compliance

Classification
D40

IP Rating
(20)

Ultra Slim

Overcharge/Discharge
Protection

Dish Size (mm)
37

LiFePO4
Li-Ion Battery




Emergency Light Series

Trak-3-EM-D40

Input Voltage:	240V AC
Wattage:	3W
CCT:	4000K
Emergency:	Maintained / Non- Maintained
Beam Angle (°):	120°
Classification:	D40
Battery:	LiFePO4
Mounting:	3 Track Circuit
Emergency Duration:	3hrs
LED Type	COB
Warranty:	4 Year Warranty including battery
Compliance:	Fully Compliant to AS/NZS2293.3


TRAK-3-EM-D40 products are all self test.



Item No.	Variants	CCT
TRAK-3-EM-D40-BLK	66096	4000K
TRAK-3-EM-D40-WHT	66097	

Evac-D40-Mini

Input Voltage:	240V AC
Wattage:	1.8W
CCT:	4000K
Emergency:	Maintained / Non- Maintained
Beam Angle (°):	120°
Classification:	D40
Battery:	LiFePO4
Mounting:	Recessed Mounting
Emergency Duration:	3hrs
LED Type	COB
Warranty:	4 Year Warranty including battery
Compliance:	Fully Compliant to AS/NZS2293.3

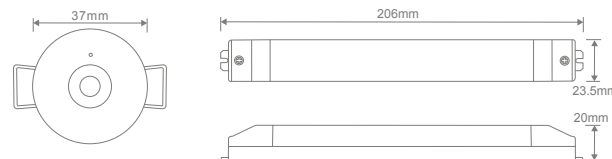

Item No.	Variants	CCT
EVAC-D40-MINI-WHT	66047	4000K
EVAC-D40-MINI-BLK	66048	

Emergency Light Series

Twin Spot EM

IK Rating
08

IP Rating
65

Replacement
(4yr)
Warranty

AS/NZS2293.3
Compliance

Overcharge/Discharge
Protection

LiFePO4
Lithium Battery

Quick & Easy
Installation


Fully
Adjustable

Wall



Twin Spot EM

Input Voltage:	240V AC
Wattage:	2.5/5W
Lumens	(2.5W) White 4000K - 200lm (5W) White 4000K - 400lm
Frequency	60Hz
Charge Time:	24hrs
Emergency Time:	2/3hrs
Operation	Non-Maintained
Function:	Manual Test Switch & LED Indicator
Working Temperature:	0-40°C
Battery:	LiFePO4
Mounting:	Wall Mounted
Warranty:	3 Year Warranty including battery
Compliance:	Fully Compliant to AS/NZS2293.3

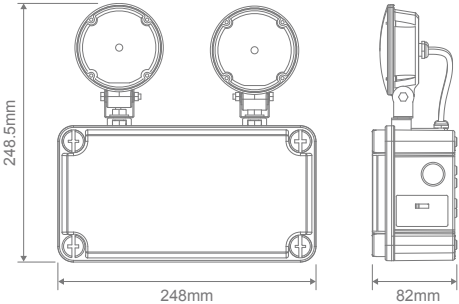

Item No.	Variants	Wattage	CCT
TWIN-SPOT-EM-WHT	66108	2.5/5W	5000K
TWIN-SPOT-EM-BLK	66109		

Emergency Light Series


EXIT Recessed Mounted Series




Emergency Light Series

EXIT Series

Input Voltage:	240V AC
Wattage:	4W Power Consumption
CCT:	4500K
Emergency:	Maintained / Non- Maintained
Battery:	LiFePO4 (Charge time 24hrs)
Terminal:	Large Terminal, PA16
Features:	24m Viewing distance, recessed mounted, Easy quick slide installation, all directional inserts included in the box, Overcharge & discharge protection, Polarity reversal protection for battery, Flex and Plug, surface mount box available.
Warranty:	4 Year Warranty including battery
Compliance:	Fully Compliant to AS/NZS2293.3

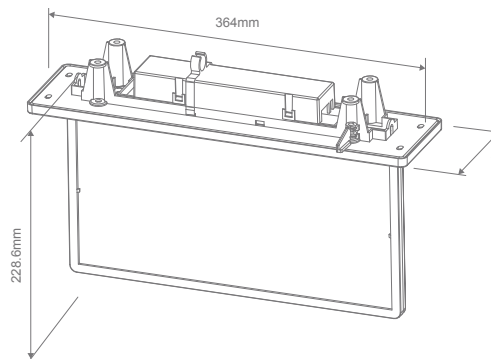


Accessories (Sold Separately)

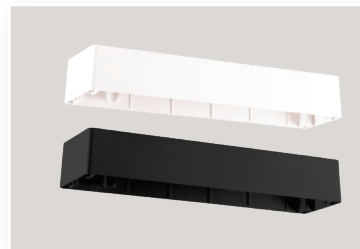

EXIT-REC-SM-KIT

Item No.	Variants	Colour
EXIT-REC-SM-KIT	66188	White
	66189	Black

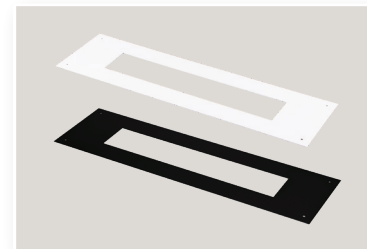

EXIT-REC-PLATE

Item No.	Variants	Colour
EXIT-REC-PLATE	66121	White
	66122	Black

Item No.	Variants	Wattage	CCT
EXIT-REC-WHT	66105	4W	4500K
EXIT-REC-BLK	66104		

Emergency Light Series


EXIT Surface Mounted Series



Emergency Light Series

EXIT Series

Input Voltage:	240V AC
Wattage:	2.5W Power Consumption
CCT:	4500K
Emergency:	Maintained / Non- Maintained
Battery:	LiFePO4 (Charge time 24hrs)
Terminal:	Large Terminal, PA16
Features:	24m Viewing distance, recessed mounted, Easy quick slide installation, all directional inserts included in the box, Overcharge & discharge protection, Polarity reversal protection for battery, Flex and Plug, surface mount box available.
Warranty:	4 Year Warranty including battery
Compliance:	Fully Compliant to AS/NSZ2293.3

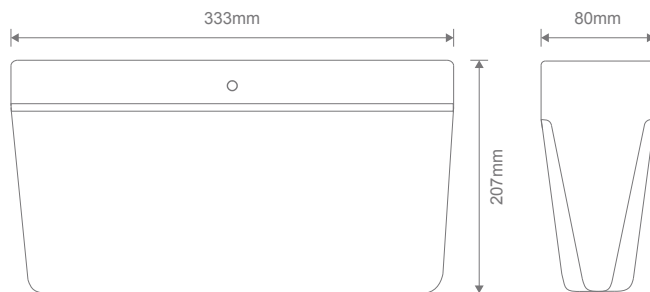

Accessories (Sold Separately)



EXIT-WPBOX

Item No.	Variants	Colour	IP Rating
EXIT-WPBOX	66102	White	IP65



EXIT-SM-ROD-MT-KIT

Item No.	Variants	Colour
EXIT-SM-ROD-MT-KIT	66124	White
	66125	Black

Item No.	Variants	Wattage	CCT
EXIT-SM-WHT	66101	2.5W	4500K
EXIT-SM-BLK	66100		

Emergency Light Series

SENSOR Surface Mounted




SENSOR Recessed Mounted



Emergency Light Series

SENSOR Surface Mounted

Input Voltage:	240V AC
IP Rating:	IP65*
Rated Load:	1000W LED
Detection Range:	360°
Detection Distance:	2-20m (<24°C)
Installation Height:	Min 10sec ± 3 sec / Max 30min ± 2min
Lux Adjustable:	Ambient light <3-2000
Working Temperature:	-20°C~+40°C
Size:	102x102x58
Relay:	16A
Feature:	Manual Override to bypass PIR sensor
Compliance:	Fully Compliant to AS/NSZ2293.3

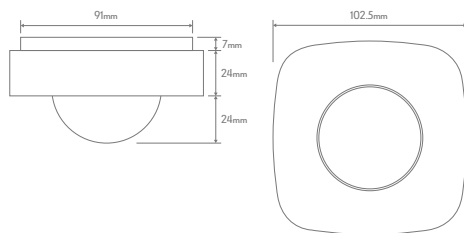


Item No.	Variants	IP Rating	Range
SENSOR-SM-01	66033	IP65*	360°

*The use of provided clear lid is required

SENSOR Recessed Mounted

Input Voltage:	240V AC
IP Rating:	IP20
Rated Load:	400W LED
Detection Range:	360°
Detection Distance:	Max 8m (<24°C)
Installation Height:	2.2-4m
Time Delay:	Min 10sec ± 3 sec Max 15min + - 3min
Lux Adjustable:	Ambient light <10-2000
Working Temperature:	-20°C~+40°C
Size:	80x44mm
Cut Out	70mm
Feature:	30° tilt, Manual Override to bypass PIR sensor
Compliance:	Fully Compliant to AS/NSZ2293.3



Item No.	Variants	IP Rating	Range
SENSOR-REC-01	66036	IP20	360°

Emergency Light Series


SUNSET-300-RND-EM



Sunset Series

Input Voltage:	240VAC
Wattage:	25W
LED	SMD
IP Rating	IP54
Class:	Class II (No Earth Required)
CRI:	≥80
Lifespan:	50,000hrs
Dimmable:	No
Beam Angle	120°
Emergency Kits:	Built-In
Microwave Sensor:	Yes
Warranty:	4 Year
Compliance:	Fully Compliant to AS/NSZ2293.3

Products are all self test.

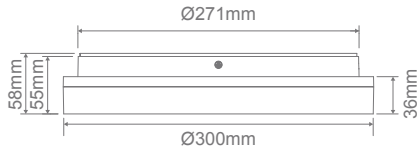

Item No.	Variants	CCT	Lumen Output		
			Warm White 3000K	Neutral White 4000K	White 5000K
SUNSET-300-RND-EM	66130	TRIO	2370lm	2485lm	2600lm

Accessories



SUNSET-REM

Item No.	Variants	IP Rating
SUNSET-REM	66133	IP65

Emergency Test Buttons

Green Indicator	Charge END
Yellow Indicator	Battery Charging
Red Indicator	Emergency Status
Green + Yellow Flashing	Battery Fault
Green + Yellow OFF	Battery Over Temp



