

BERLIN

Specifications


Voltage:	240V	Beam Angle:	60°x140° Symmetrical	CRI:	≥80
Power:	30W, 45W & 60W	CCT:	3000K	IP Rating:	IP65

Lumen (±5%):


30W	45W	60W
3840lm	5760lm	7680lm

Note: For the best visual effect and light distribution, the BERLIN is recommended for installation on posts 3 to 4 metres high.

Preparing post top for installation


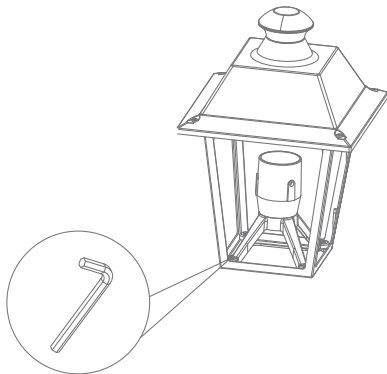


Use an internal hex socket wrench to loosen the 4-M5X14 internal hex bolt.

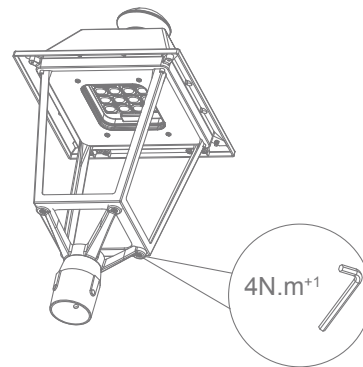

Tighten the bracket assembly with an internal hex socket wrench using 4-M5X14 internal hex screws.

Wiring procedure

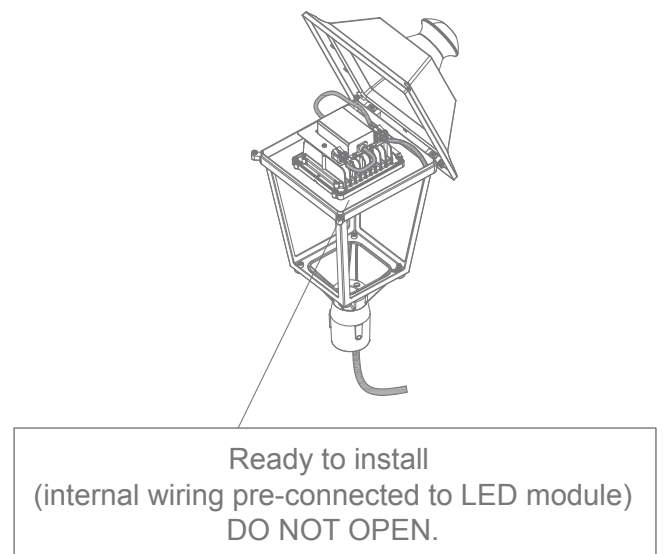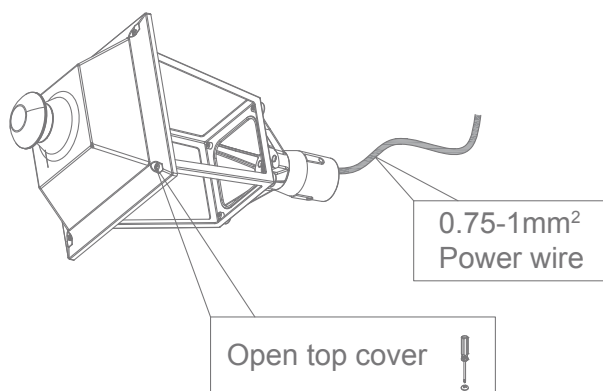


Note:

- The lamp must be installed by professional electrician
- Ensure the power supply is switched off before fitting this product


- Do not touch the lamp when in use
- Keep away from hot steam and corrosive gas

Installation Manual

LED module and driver maintenance (to be followed by licensed electrician only)

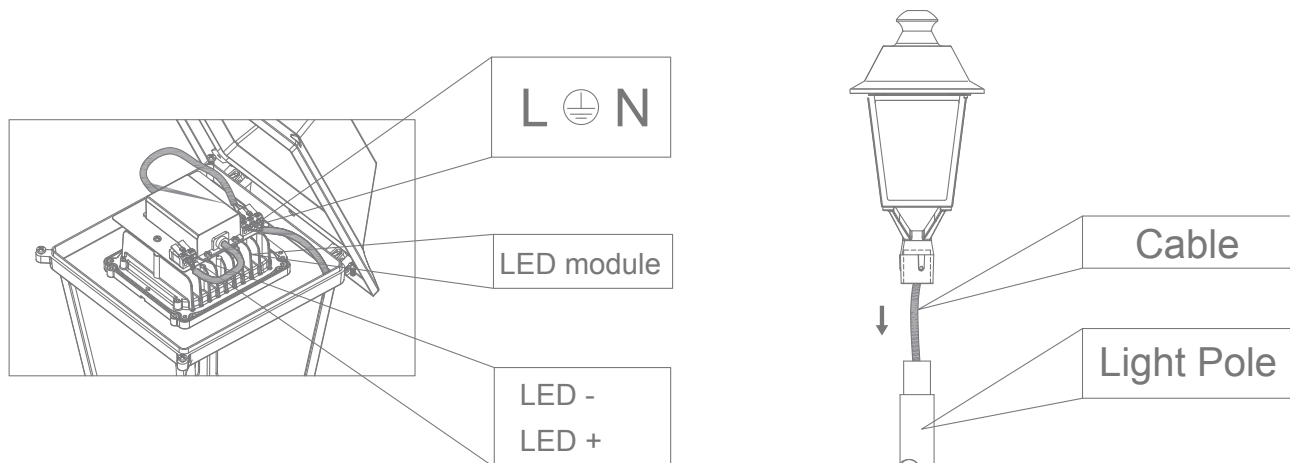

Pole and wiring installation

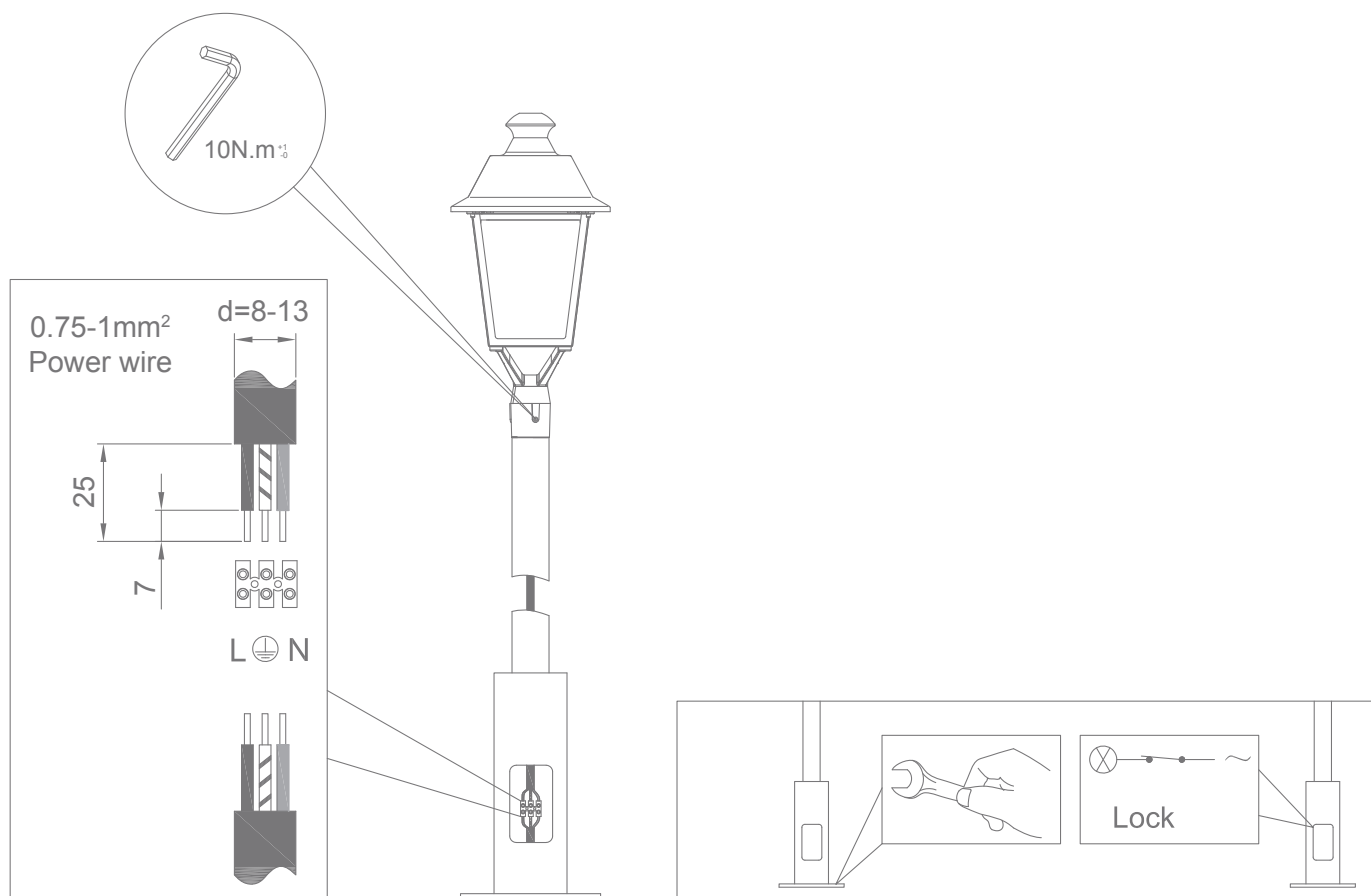

Note:

- The lamp must be installed by professional electrician
- Ensure the power supply is switched off before fitting this product

- Do not touch the lamp when in use
- Keep away from hot steam and corrosive gas