29-31 Richland St. Kingsgrove. Sydney NSW 2208 Australia
Phone: 02 9554 9600
enquiries@domuslighting.com.au | www.domuslighting.com.au

Installation Manual


Date: May 13, 2025 11:13 AM

HYDRO-120-EM-TEMP

Specifications


Voltage:	240V	Lumen (±5%):	4800lm	Dimmable:	No
Power:	40W	Beam Angle:	120°	Operating Temp:	0 - 45°C
IP Rating:	IP66	CCT:	4000K	Power Factor:	>0.96
CRI:	≤80	Lifespan:	50,000hrs		

1.

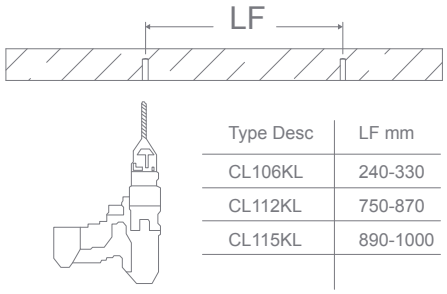


Type Desc	LF mm
CL106KL	240-330
CL112KL	750-870
CL115KL	890-1000


2.

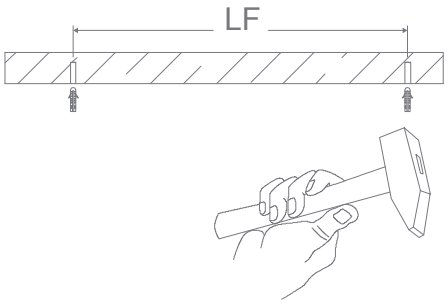


3A.

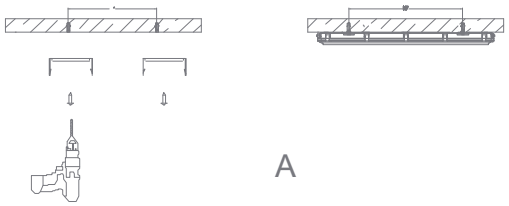


3B.

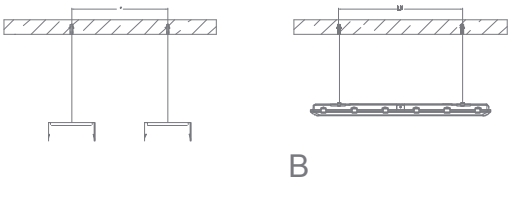

4.

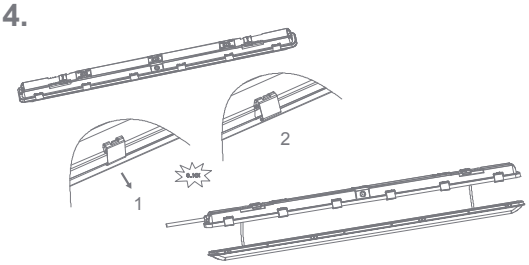


5.

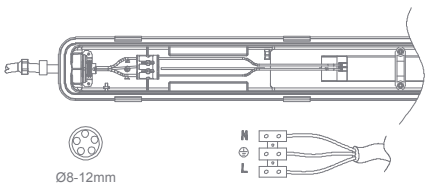


Outside the connection wire diameter shall apply:
3G1.0mm²~3G2.5mm²


6.

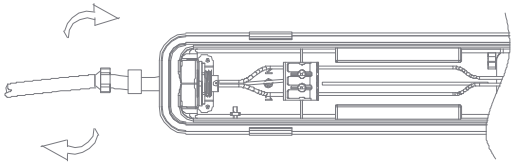


7.

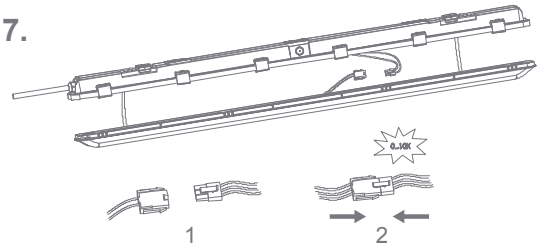

8.

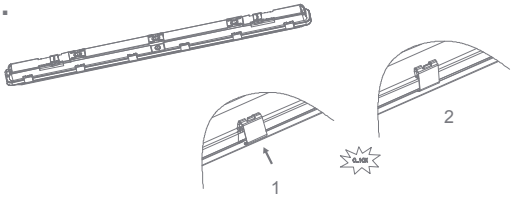

9.

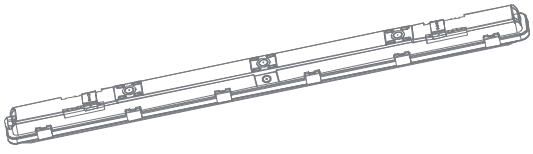

Note:

- -The lamp must be installed by professional electrician
- -Ensure the power supply is switched off before fitting this product
- -Do not touch the lamp when in use
- -Keep away from hot steam and corrosive gas