Date: May 13, 2025 11:13 am

# Hydro 120 Temp

## Temporary LED Batten

## Description

The HYDRO LED TEMPORARY Weatherproof Batten series is a direct replacement to traditional T8 and T5 Fluorescent battens, designed as a cost-effective solution for temporary lighting on construction sites. Custom designed to colour match concrete ceilings, and incorporating a "quick fix" solution to allow for ease and speed of installation. Constructed from high-quality and high impact resistant polycarbonate, with a high transparency frosted polycarbonate diffuser. Available in 1200mm lengths, with a Neutral White 4000K colour temperature light output. Suitable for domestic applications such as underground basements, garages, and outdoor areas. Also, commercially for underground carparks, and construction site temporary lighting. Attached Stainless Steel clips for durable and fast installation. Available as standard or with Emergency lighting option. Backed by a 3 Year Warranty.




## Specification Features

| | |
|---|---|
| Input Voltage: | 240V AC |
| Power (W): | 40W |
| IP rating (IP): | IP66 |
| IK Rating (IK): | IK08 |
| Lumens (lm): | Neutral White 4000K - 4800lm |
| LED type: | SMD |
| CCT: | 4000K |
| CRI: | ≥80 |
| Beam angle (°): | 120° |
| Dimmable: | No |
| Lifespan (hrs): | 50,000hrs |
| Application: | Surface mounted or suspended |
| Operating Temperature: | -20° to 50° |

*Supplied with a 1-meter, 3-pin flex and plug.*

## Diagrams / Additional

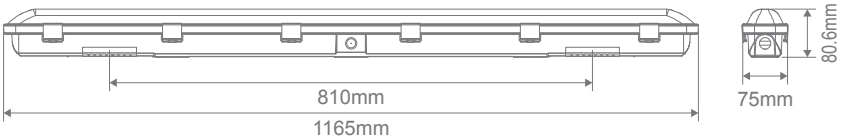


| Item No. | Variant | CCT |
|---|---|---|
| HYDRO-120-TEMP | 66180 | 4000K |

Domus 29-31 Richland Street. Kingsgrove NSW 2208 | Phone: (02) 9554 9600 | email: orders@domuslighting.com.au
Specification subject to change without prior notice.