DOMUS®

Date: September 15, 2025 10:47 am

Impact 60

LED WP Aluminium

Description

The IMPACT LED Weatherproof and Vandalproof Batten series are a direct replacement to traditional T8 and T5 Fluorescent battens. Designed to closely colour match concrete ceilings, and incorporating a vandalproof solution for public areas. Constructed from high-quality and high impact resistant aluminium body, and a high transparency opal polycarbonate diffuser. Available in 600mm and 1200mm lengths, as well as Tricolour switchable: choose between Warm White 3000K, Neutral White 4000K, or White 5000K colour temperatures with the flick of a dip switch. Suitable for commercial and industrial indoor and outdoor public area applications such as underground basements, service corridors, correctional facilities, plant rooms, railway and bus terminals, schools, factories as well as tunnels.




Waterproof Gland

Specification Features

Input Voltage:	240V
Power (W):	10/20W
IP rating (IP):	IP66
IK rating (IK):	IK10
Lumens (lm):	(10W) Warm White 3000K - 1100lm (20W) Warm White 3000K - 2200lm (10W) Neutral White 4000K - 1200lm (20W) Neutral White 4000K - 2400lm (10W) White 5000K - 1200lm (20W) White 5000K - 2400lm
LED type:	SMD
CCT:	3000K - 4000K - 5000K
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No
Lifespan (hrs):	50,000hrs

Diagrams / Additional

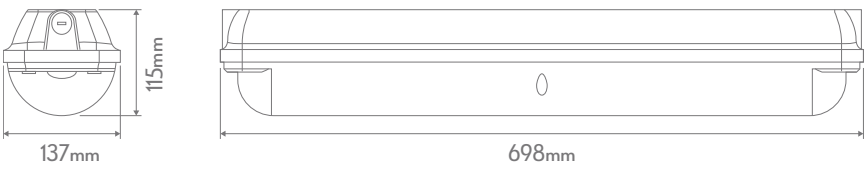

Item No.	Variant		CCT
	Non Sensor	*Dim Sensor*	
IMPACT-60	66115	66149	TRIO

Domus 29-31 Richland Street. Kingsgrove NSW 2208 | Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | email: enquiries@domuslighting.com.au

Specification subject to change without prior notice.