
Date: May 25, 2026 2:15 pm

Pleo 7.2-T

Top View Neon Flex LED Strip

Description

The PLEO-7.2 series is available in both front-facing and side-view formats, making it ideal for horizontal and vertical illumination applications. Housed in a low-voltage, safe polyurethane enclosure, the range includes mounting clips for quick and easy installation.
Engineered for longer run applications, the PLEO-7.2 allows for up to 20 metres of continuous light from a single driver feed at one end or extend up to 40 metres when powered from both ends. It is available in three colour temperatures, all with a high CRI90 for superior colour rendering. With a high weatherproof rating, this versatile lighting solution from Domus Lighting is designed to perform in a wide range of indoor and outdoor environments. Perfect for illuminating ceiling and floor coves, windows, walls, signage, and more the PLEO-7.2 series offers flexible, high quality lighting for any creative or architectural application.

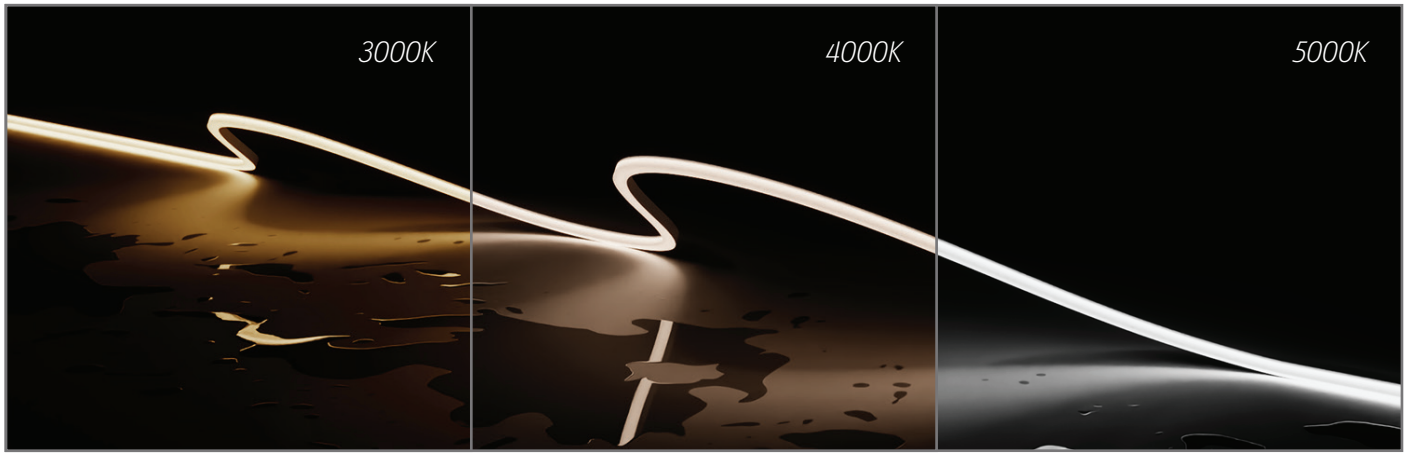


Specification Features

Input Voltage:	24V
Power (W):	7.2W
IP rating (IP):	IP67
LED type:	SMD
CCT:	3000K, 4000K & 5000K
LEDs per Metre:	120
Cutting Length:	50mm
lm/W:	90lm
Continuous Run:	20m Max (One end driver feed) 40m Max (Two end driver feed)
Beam angle (°):	165°
Dimmable:	Yes
Operating Temperature:	-15°C to 85°C

Requires a driver

Diagrams / Additional

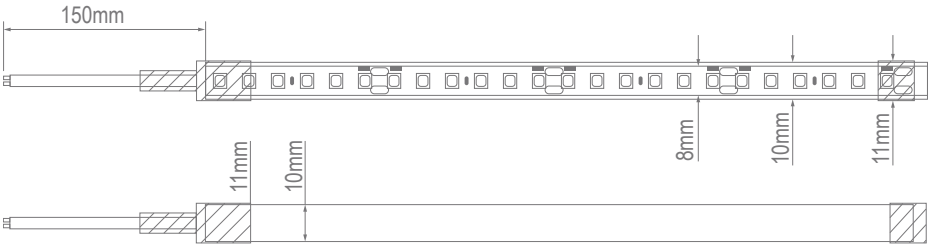

Item No.	Variant		
	3000K	*4000K*	*5000K*
PLEO-7.2-T	20377	20378	20379

Domus 29-31 Richland Street. Kingsgrove NSW 2208 | Phone: 1300 236 687 | email: orders@domuslighting.com.au
Specification subject to change without prior notice.