
LP-2012-RC-1M

LED Profile REC 20x12mm P/M C/W DIFF & EC

Description

Introducing the LP-2012-RC surface mounting profile system. The LP-2012-RC is specifically designed for the Domus range of LED strip lighting. This aluminium mounting profile system incorporated extruded profile complete with a flat opal or clear colour polycarbonate diffuser. The key features of the LP-2012-RC is the ability to not only on conceal the LED strip lighting but also keep the strip lighting linear. Also, the LP-2012-RC keeps LEDs free from foreign objects and vapours which may damage the LEDs. A simple yet very contemporary LED recessed mounted profile ideally suited to under bench mounting, wardrobes or laundry applications.

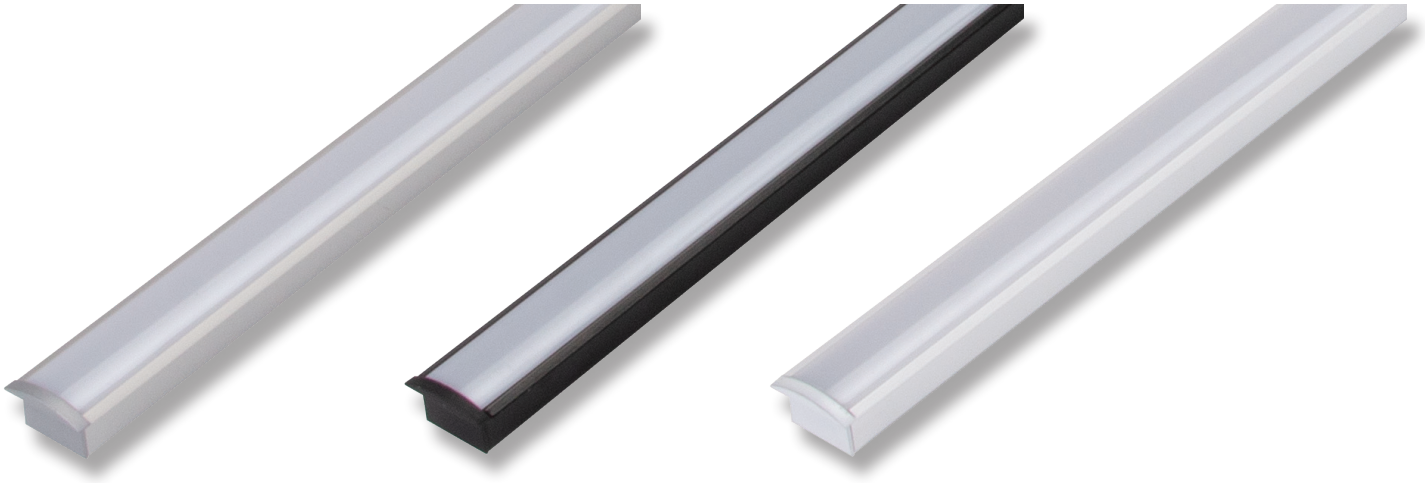


Specification Features

Installation:	Recessed mounted
Material:	Extruded aluminium 6063
Finish:	Natural clear anodised
Diffuser:	Curved (PC) Opal or clear colour
Length (mm):	3000mm continuous*
Size (mm):	Profile (W) 26.7mm (H) 16.39mm
Accessories (each):	End caps (silver) and spring clips**
Special:	Custom powder coated colour upon request***
Driver Installation:	Remote driver required (not included)

* *Profile sold per meter. Can be cut to suit any length.*
** *Accessories to be ordered separately.*
*** *Special powder coat finishes upon request. Surcharges apply.*


PLEX Compatible Strip

PLEX-COB-5-IP54	PLEX-RGBTW-IP67
PLEX-COB-10-IP54	PLEX-RGB-IP54
PLEX-COB-15-IP54	PLEX-RGB-IP67
PLEX-COB-20-IP54	PLEX-COB-TW-IP54
PLEX-COB-5-IP67	PLEX-COB-TW-IP67
PLEX-COB-10-IP67	PLEX-MICRO
PLEX-COB-15-IP67	PLEX-ULTRA-IP54
PLEX-COB-20-IP67	PLEX-ULTRA-IP67
PLEX-VIVID-IP54	PLEX-SMD-5-IP66
PLEX-VIVID-IP67	PLEX-SMD-9-IP54
PLEX-RGBTW-IP54	PLEX-SMD-9-IP67



Simulation

Diagrams / Additional

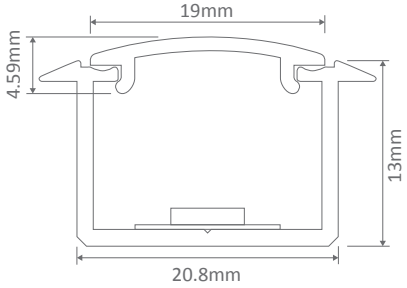

Item No.	Variant			Details
	Alu	*Blk*	*Wht*	
LP-2012-RC-1M	22005	22064	22065	Sold per 1 metre