# DOMUS®

## Lighting 2024 - 2025






# Our *Showroom*

domuslighting.com.au

We welcome you to visit our brand new stunning 1200m² wholesale showroom, by appointment. Be inspired with our constantly evolving and unique display of our range of residential interior lighting products, through to our range of innovative exterior LED Lighting products. Please contact your local Sales Representative or alternatively contact the Domus Lighting head office on (02) 9554 9600 for appointment booking.

# Table of Contents


| Product | Page |
|---|---|
| **Interior** | |
| LED Downlights | |
| Tick-8 | 10 |
| Tack-8 | 11 |
| Boost-10 | 12 |
| Bliss-10 | 13 |
| Swap Deep | 14 |
| Swap Sleek | 15 |
| Swap Step | 16 |
| Surface Socket | 17 |
| Deco Series | 18-22 |
| Tek Series | 23 |
| Aqua Series | 24-25 |
| Cell Series | 26-30 |
| Deep-9 | 32 |
| Deep-10/12 | 34 |
| Scoop Series | 35 |
| Expo Series | 36-37 |
| Neo Pro Recessed Series | 38-39 |
| Moon Recessed Series | 40-41 |
| Pico Series | 42-43 |
| Astra Trio Series | 44 |
| Moon Surface Mounted Series | 46-47 |
| Neo Pro Surface Mounted Series | 48-49 |
| Neo Surface Mounted Tilt Series | 50-51 |
| Pistol Series | 52-53 |
| LED Globes | |
| LED Filament Series | 54-58 |
| LED Retro Vintage Filament Lamp | 59-63 |
| Key GLS 12V | 64 |
| Key GLS TRIO | 65 |
| Key G5.3 TRIO | 66 |
| Key G9 TRIO | 66 |
| Key G9 | 67 |

| Product | Page |
|---|---|
| Key MR11-3 | 68 |
| Key MR16 Glass | 69 |
| Key GU10 Glass | 70 |
| Key MR16 & GU10 TRIO | 71 |
| Key T40 TRIO | 72 |
| Key-PAR Series | 73 |
| LED Profiles | |
| Bloc 20 | 75 |
| Curve 20 | 76 |
| Corner 16 RND | 77 |
| Micro SM | 78 |
| Micro REC | 79 |
| Nova 17 SM | 80 |
| Nova 17 REC | 81 |
| Nova 20 SM | 82 |
| Nova 20 REC | 83 |
| Nova 24 SM | 84 |
| Nova 24 REC | 85 |
| Omega 17 SM | 86 |
| Bloc 42 | 87 |
| Omega 35 SM | 88 |
| Omega 35 REC | 89 |
| LED Strip | |
| Plex COB 5 | 90 |
| Plex COB 10 | 91 |
| Plex COB 15 | 92 |
| Plex COB 20 | 93 |
| Plex COB 5 IP67 | 94 |
| Plex COB 10 IP67 | 95 |
| Plex COB 15 IP67 | 96 |
| Plex COB 20 IP67 | 97 |
| Plex Vivid Series | 98 |
| Plex Vivid IP67 Series | 99 |
| Plex RGBTW Series | 100 |

# Table of Contents


| Product | Page |
|---|---|
| Plex RGBTW IP67 Series | 101 |
| Plex RGB Series | 102 |
| Plex RGB IP67 Series | 103 |
| Plex COB TW Series | 104 |
| Plex COB TW IP67 Series | 105 |
| Plex COB Accessories | 106 |
| Plex MICRO Series | 107 |
| Plex ULTRA Series | 108 |
| Plex ULTRA IP67 Series | 109 |
| Plex SMD-5 IP66 Series | 110 |
| Plex SMD-9 Series | 112 |
| Plex SMD-9 IP67 Series | 113 |
| Pleo 14.4 | 114 |
| Pleo 14.4S | 115 |
| **LED Controllers** | |
| CHAM-BT-RF-5C | 116 |
| CHAM-REM-3C | 118 |
| CHAM-REM-1C | 119 |
| CHAM-TOUCH-3C | 120 |
| CHAM-TOUCH-1C | 121 |
| CHAM-DR-4C | 122 |
| CHAM-DR-1C | 123 |
| CHAM-DIM-DALI-4C | 124 |
| CHAM-DIM-DALI-1C | 125 |
| CHAM-DIM-DMX | 127 |
| **LED Profile Systems** | |
| Maxi-40 Recessed Flat Series | 130 |
| Maxi-40 Surface Mount Flat Series | 131 |
| Maxi-40 Pendant Flat Series | 132 |
| Maxi-40 Down Wall Bracket Series | 133 |
| Maxi-50 Recessed Series | 134 |
| Maxi-50 Surface Mount Series | 135 |
| Maxi-50 Down Pendant Series | 136 |
| Maxi-50 Up/Down Pendant Series | 137 |

| Product | Page |
|---|---|
| Maxi-50 Down Wall Bracket Series | 138 |
| Maxi-50 Up/Down Wall Bracket Series | 139 |
| Maxi-Curve Surface Mount Series | 140 |
| Maxi-Curve Pendant Series | 141 |
| Maxi-75 Recessed Series | 142 |
| Maxi-75 Surface Mount Series | 143 |
| Maxi-75 Down Pendant Series | 144 |
| Maxi-75 Up/Down Pendant Series | 145 |
| Maxi-75 Down Wall Bracket Series | 146 |
| Maxi-75 Up/Down Wall Bracket Series | 147 |
| **LED Ceiling Lights** | |
| Mondo Round Series | 148 |
| Solar Round Series | 149 |
| Solar Square Series | 150 |
| Easy Series | 151 |
| Sunset Series | 152 |
| Panel Backlit Series | 154 |
| LED Panel Recessed Plaster Frames | 156 |
| LED Panel Surface Mount Frames | 156 |
| LED Panel Surface Mount Frames Installation Guide | 157 |
| LED Panel Wire Suspension Kit | 157 |
| **LED Track Lights** | |
| Moon Track Series | 160-161 |
| Moon Track Pendant Series | 162-163 |
| Thor Series | 164-165 |
| Trak-3 Series | 168 |
| Trak-3 Accessories | 169 |
| **Pendants** | |
| Allegra Series | 170 |
| Forge Series | 171 |
| Strap Series | 171 |
| Carter Series | 172 |
| Spin | 174 |
| Felix Series | 175 |




Table of Contents


| Product | Page |
|---|---|
| Hoist Series | 176 |
| Bubble Series | 177 |
| Flaunt Series | 178 |
| Sands | 179 |
| Sail Series | 180 |
| Eva Series | 181 |
| Diana | 182 |
| Ashley | 183 |
| Evelyn Series | 184 |
| Moon Pendant Series | 186-187 |
| Luna Series | 188 |
| Zoey Series | 190 |
| Ruby Series | 191 |
| Jade-220 Series | 192 |
| Jade-240 Series | 194 |
| Melody Series | 196 |
| Nova Series | 198 |
| **LED Linear Pendants** | |
| Max-35 Series | 200 |
| Maxi-40 Flat Series | 202 |
| Maxi-40 Low Series | 203 |
| Maxi-40 High Series | 204 |
| Maxi-50 1.2M Series | 205 |
| Maxi-50 1.7M Series | 206 |
| Maxi-50 2.4M Series | 207 |
| Maxi-Curve 1.2M Series | 208 |
| Maxi-Curve 1.7M Series | 209 |
| Maxi-Curve 2.4M Series | 210 |
| **Table & Desk Lamps** | |
| Strap Series | 211 |
| Allegra Series | 212 |
| Forge | 213 |
| Sands | 214 |
| Ashley Series | 215 |

| Product | Page |
|---|---|
| Giana Series | 216 |
| Sandra Series | 217 |
| Carter Series | 218 |
| Ashley | 219 |
| Leah Series | 220 |
| Marisol | 221 |
| Rustica | 222 |
| Tinley Series | 223 |
| Carter Series | 224 |
| **Floor Lamps** | |
| Strap Series | 225 |
| Allegra Series | 226 |
| Forge | 227 |
| Ashley | 228 |
| Cyclops | 229 |
| Samson | 230 |
| Eden Series | 231 |
| Elsa Series | 232 |
| Leah Series | 233 |
| Marisol | 234 |
| Rustica | 235 |
| Tinley Series | 236 |
| Carter Series | 237 |
| **Bedside Light** | |
| Charge-01 Series | 238 |
| Charge-02 Series | 239 |
| **LED Wall Lights** | |
| Lumaline-2 Series | 240 |
| Shadowline Series | 241 |
| Strap Series | 242 |
| Glow 8 Series | 243 |
| Moon Wall Series | 244-245 |
| Sinta Series | 246 |
| Deens 8 | 247 |

# Table of Contents


| Product | Page |
|---|---|
| **Vanity Lights** | |
| Mirror Series | 248-249 |
| Mirror Side Series | 250 |
| HL-804 Series | 251 |
| **Ceramic Lights** | |
| BF-2012 | 252 |
| BF-2013 | 252 |
| BF-2014 | 253 |
| BF-2018 | 253 |
| BF-2019 | 254 |
| BF-2020 | 254 |
| BF-2185 | 255 |
| BF-2350 | 255 |
| BF-2440 | 256 |
| BF-2601A | 256 |
| BF-2601B | 257 |
| BF-2607A | 257 |
| BF-2607B | 258 |
| BF-2608A | 258 |
| BF-7577 | 259 |
| BF-7578 | 259 |
| BF-2608B | 260 |
| BF-7310 | 260 |
| BF-7603 | 262 |
| BF-7908 | 262 |
| BF-7949 | 263 |
| BF-8042 | 263 |
| BF-8235 | 264 |
| BF-8258 | 264 |
| BF-8284 | 265 |
| BF-8286 | 265 |
| BF-8259 | 266 |
| BF-8276 | 266 |
| BF-8411 | 267 |
| BF-8418 | 267 |
| **LED Step Lights** | |
| Camino Series | 268-269 |
| **Ceiling Fans** | |
| Strike 48 | 270 |
| Strike Light Kit | 271 |
| Strike 60 | 272 |
| Strike Light Kit | 273 |
| Blast 48 | 274 |
| Blast Light Kit | 275 |
| Blast 52 | 276 |
| Blast Light Kit | 277 |
| Glide 80 | 278 |
| Glide Light Kit | 279 |
| Axis 48 | 280 |
| Axis 48 Light | 281 |
| Motion 52 | 282 |
| Motion 52 Light | 283 |
| Hover 56 | 284 |
| Hover 56 Light | 285 |
| Fresco 52 | 286 |
| Fresco 52 Light | 287 |
| Ceiling Fan Accessories | 288-289 |
| **LED Battens** | |
| Bolt Series | 290 |
| Bolt Emergency Series | 291 |
| Hydro Weatherproof Series | 292-293 |
| Hydro Emergency Weatherproof Series | 292-293 |
| Park Series | 294-295 |
| Park Emergency Series | 294-295 |
| Impact Series | 296 |




Table of Contents


| Product | Page |
|---|---|
| **Exterior** | |
| **LED Wall Lights** | |
| Shadow Series | 298-304 |
| Finn-8 Series | 306 |
| Zelda-18 Series | 307 |
| Halo Series | 308 |
| Livi Series | 309 |
| Miley 10 Series | 310 |
| Alpha Series | 311 |
| Piper 1 Series | 312-313 |
| Piper 2 Series | 314-315 |
| Whisper Series | 316 |
| Dash Series | 318 |
| Sierra Series | 320 |
| Bell Series | 322 |
| Block Series | 324 |
| Edge Series | 325 |
| Dent Series | 326 |
| Kira Series | 328 |
| Casa Series | 329 |
| Claro Series | 330 |
| Como Series | 331 |
| York Series | 333 |
| **LED Step Lights** | |
| Zone Series | 334 |
| Zac Series | 336-338 |
| Zeke-9 Series | 340 |
| Zeke-4 Series | 341 |
| Zeke-8 Series | 342 |
| You Series | 343 |
| **LED Floodlights** | |
| Blaze-Pro Series | 344 |
| Blaze-Pro Accessories | 346-347 |
| Flash-20 Series | 348 |
| **LED Spot Lights** | |
| Elite Adjustable | 349 |
| **LED Security Lights** | |
| Muro-Eco Series | 350 |
| Muro-Max Series | 351 |
| Muro-Pro Series | 352-353 |
| **LED Garden Lights** | |
| Elite Spike | 354 |
| Kira Spike | 355 |
| Zoom Pro Series | 356 |
| Shadow Spike Series | 358 |
| Shadow Path Series | 359 |
| Dusk Path Series | 360 |
| Dusk Stick Series | 361 |
| Dusk Spike MR11 | 362 |
| Dusk Spike MR16 | 363 |
| **LED Deck Lights** | |
| Vivid Series | 364-365 |
| Deka Series | 366 |
| Magneto Series | 369-371 |
| Modula Series | 372 |
| **LED Bunker Lights** | |
| Versa Series | 373 |
| **Polysphere & Accessories** | |
| Polysphere Series | 374 |
| 60mm Aluminium Post Series | 376 |
| 76mm Aluminium Post Series | 377 |
| **Bollard Lights** | |
| BL-100 | 378 |
| BL-100-1M-KIT | 379 |
| BL-200 | 380 |
| BL-200-1M-KIT | 381 |

# Table of Contents


| Product | Page |
|---|---|
| BL-300 | 382 |
| BL-300-1M-KIT | 383 |
| BL-400 | 384 |
| BL-400-1M-KIT | 385 |
| **LED Solar Lights** | |
| Sunsolar-1 | 386 |
| Sunsolar-1-Kit | 387 |
| **Traditional Exteriors** | |
| Monaco Series | 388-393 |
| Lisbon Series | 394-400 |
| Siena Series | 401-406 |
| Vienna | 407-414 |
| Vienna Large Series | 415-418 |
| Chester Series | 419-426 |
| Chester Large Series | 427-430 |
| Paris Series | 431-436 |
| Avignon Series | 437-442 |
| Turin Series | 443-448 |
| Turin Large Series | 449-452 |
| Accessories | 453-455 |
| **LED Drivers** | |
| WP-12V Series | 456 |
| WP-24V Series | 458 |
| WP-350mA Series | 460 |
| WP-700mA Series | 461 |

| Product | Page |
|---|---|
| **Emergency Lights** | |
| Evac D63 Surface Mounted | 462 |
| Evac D63 Recessed | 462 |
| Exit Surface Mount Series | 464-465 |
| Exit Recessed Mount Series | 466-467 |
| Evac D40 Mini | 468 |
| Trak 3 EM D40 | 469 |
| Sunset Series | 472-473 |
| Park-DIFF | 474/476 |
| Park-WG | 475/477 |
| Hydro Series | 478-479 |
| Bolt Series | 480-481 |
| SENSOR Surface Mounted | 482 |
| SENSOR Recessed Mounted | 483 |


# IP Rating Chart

The Ingress Protection Rating consists of the letters IP followed by two digits. The first digit refers to the protection against the ingress of solids particles and the second digit to the protection against the ingress of liquids.

IP _ _

| IP | Effective Against | Description |
|---|---|---|
| 0 | - | No protection against contact and ingress of objects |
| 1 | ≥50mm | Any large surface of the body, such as the back of a hand, but no protection against deliberate contact with a body part. |
| 2 | >12.5mm | Fingers or similar objects |
| 3 | >2.5mm | Tools, thick wires, etc. |
| 4 | >1mm | Most wires, slender screws, large ants etc. |
| 5 | Dust Protected | Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the safe operation of the equipment. |
| 6 | Dust-Tight | No ingress of dust; complete protection against contact (dust-tight). A vacuum must be applied. Test duration of up to 8 hours based on airflow. |

| IP | Effective Against | Description |
|---|---|---|
| 0 | None | ---- |
| 1 | Dripping Water | Dripping water (vertically falling drops) shall have no unsafe effect on the specimen when mounted in an upright position onto a turntable and rotated at 1 RPM. |
| 2 | Dripping water when tilted at 15° | Vertically dripping water shall have no harmful effect when the enclosure is tilted at an angle of 15° from its normal position. A total of four positions are tested within two axes. |
| 3 | Spraying water | Water falling as a spray at any angle up to 60° from the vertical shall have no harmful effect, utilizing either: a) an oscillating fixture, or b) A spray nozzle with a counterbalanced shield. |
| 4 | Splashing of water | Water splashing against the enclosure from any direction shall have no harmful effect, utilizing either:<br>a) an oscillating fixture, or b) A spray nozzle with no shield. |
| 5 | Water jets | Water projected by a nozzle (6.3 mm) against enclosure from any direction shall have no harmful effects. |
| 6 | Powerful water jets | Water projected in powerful jets (12.5 mm) against the enclosure from any direction shall have no harmful effects. |
| 6K | Powerful water jets with increased pressure | Water projected in powerful jets (6.3 mm nozzle) against the enclosure from any direction, under elevated pressure, shall have no harmful effects. |
| 7 | Immersion, up to 1 meter (3 ft 3 in) depth | Ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time (up to 1 meter of submersion). |
| 8 | Immersion, 1 meter (3 ft 3 in) or more depth | The equipment is suitable for continuous immersion in water under conditions which shall be specified by the manufacturer. However, with certain types of equipment, it can mean that water can enter but only in such a manner that it produces no harmful effects. The test depth and duration is expected to be greater than the requirements for IPx7, and other environmental effects may be added, such as temperature cycling before immersion. |
| 9K | Powerful high-temperature water jets | Protected against close-range high pressure, high-temperature spray downs. Smaller specimens rotate slowly on a turntable, from 4 specific angles. Larger specimens are mounted in the intended position when being used, no turntable required, and are tested freehand for at least 3 minutes at a distance of 0.15–0.2 meters. |

With over 60 years heritage of manufacturing and distribution of lighting products for the Australasian market, Domus Lighting has developed a highly regarded reputation for innovation, quality and reliability. We are focused on continuing that reputation by investing in energy efficient lighting products, using the latest lighting technologies. Domus, was formed in 1961 in response to a growing need for quality lighting products. Now, Domus Lighting has expanded to become one of Australia's leading distributors of LED lighting to the Electrical Wholesale and Lighting Retail distribution channels.

Proudly 100% Australian owned, the company operates from a modern 13,000m$^2$ distribution facility and head office. Domus Lighting also offers a custom made lighting service to help provide a solution to those exciting and challenging designs. Our team are committed to applying their unrivalled LED experience and lighting expertise to enhance any of your energy saving lighting requirements. Combining that capability with the strength of our sales force, you can count on us to support you for all your lighting needs.

# Multi CCT LED's

## Technology

Multi-CCT LED's are products that can produce up to 5 different colour temperatures, thoughout the Domus catalogue you'll find products that have this function.
This is the breakdown of the available options:

**XWW= 2700K | WW= 3000K | NW= 4000K**
**W= 5000K | XW= 5700K**













## Tick-8

- Flat-face frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (No Earth Required)
- Optional Black and Satin Chrome Fascia covers available





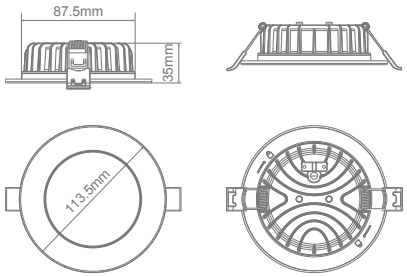


| Item No. | Variant | | |
|---|---|---|---|
| | Wht | Blk | Snck |
| TICK-COVER | N/A | 20829 | 20830 |

Cutout: 90mm

| Item No. | Variant | CCT | Wattage | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|
| | | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| TICK-8-WHT | 20828 | TRIO | 8W | 44 | 750lm | 800lm | 780lm |






## Tack-8

- Anti-glare frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (No Earth Required)
- Optional Black and Satin Chrome Fascia covers available





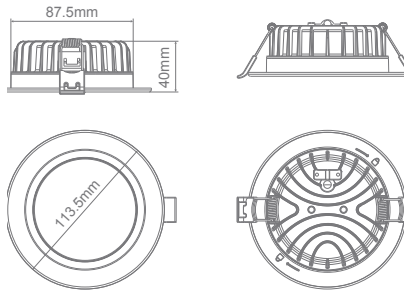


| Item No. | Variant | | |
|---|---|---|---|
| | Wht | Blk | Snck |
| TACK-COVER | N/A | 20833 | 20834 |


Cutout: 90mm

| Item No. | Variant | CCT | Wattage | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|
| | | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| TACK-8-WHT | 20832 | TRIO | 8W | 44 | 750lm | 800lm | 780lm |

## Boost-10

- Anti-glare frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (No Earth Required)



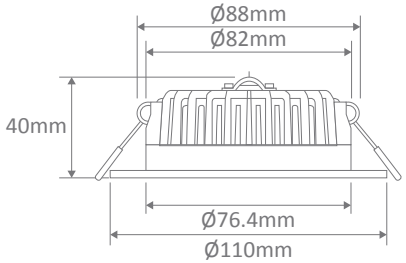


**Cutout: Ø90mm**

| Item No. | Variants | | CCT | Wattage | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| BOOST-10 | 20727 | 20726 | TRIO | 10W | 54 | 750lm | 780lm | 800lm |









## Bliss-10

- Flat face frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (no Earth Required)

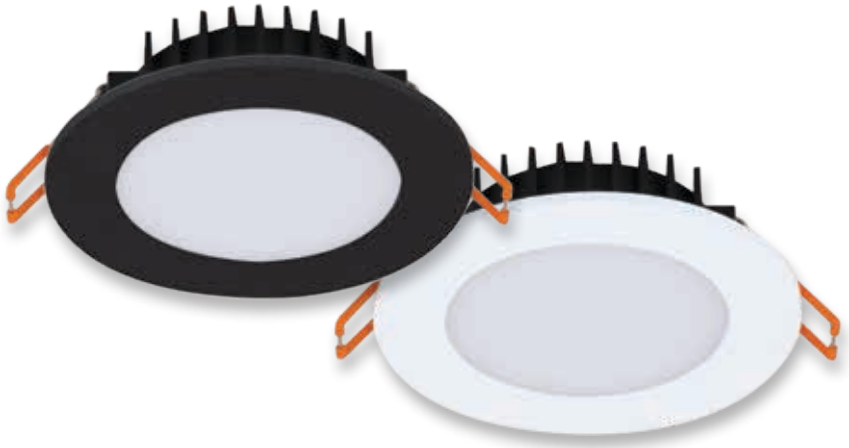

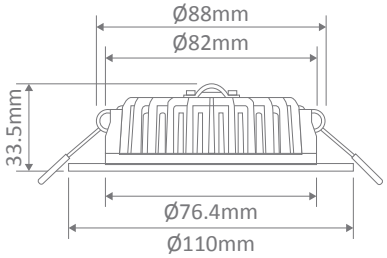



**Cutout: Ø90mm**


| Item No. | Variants | | CCT | Wattage | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| BLISS-10 | 20707 | 20706 | TRIO | 10W | 54 | 750lm | 780lm | 800lm |

## Swap Deep

- Deep-face frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.
- Double Insulated.
- Class II (No earth required).







Cutout: Ø90mm - 100mm

| Item No. | Variants | Colour | CCT | Wattage | IP Rating | Lumen Output Warm White 3000K | Lumen Output Neutral White 4000K | Lumen Output White 5700K |
|---|---|---|---|---|---|---|---|---|
| SWAP-8-DEEP | 21445 | Wht/Wht | TRIO | 8W | IP44 | 800lm | 900lm | 850lm |
| | 21446 | Blk/Blk | | | | | | |
| | 21447 | Wht/Gunmetal | | | | | | |
| | 21448 | Wht/Gold | | | | | | |
| | 21449 | Wht/Chrome | | | | | | |









## Swap Sleek

- Flat-face frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.
- Double Insulated.
- Class II (No earth required).





Cutout: Ø90mm - 100mm

| Item No. | Variants | Colour | CCT | Wattage | IP Rating | Lumen Output Warm White 3000K | Lumen Output Neutral White 4000K | Lumen Output White 5700K |
|---|---|---|---|---|---|---|---|---|
| SWAP-8-SLEEK | 21455 | White | TRIO | 8W | IP44 | 800lm | 900lm | 850lm |
| | 21456 | Black | | | | | | |
| | 21457 | Satin Chrome | | | | | | |


## Swap Step


- Step-face frame.
- Polyamide frame and heat sink.
- Fully dimmable with suitable dimmers.
- Double Insulated.
- Class II (No earth required).









Cutout: Ø90mm - 100mm

| Item No. | Variants | Colour | CCT | Wattage | IP Rating | Lumen Output Warm White 3000K | Neutral White 4000K | White 5700K |
|---|---|---|---|---|---|---|---|---|
| SWAP-8-STEP | 21451 | White | TRIO | 8W | IP44 | 800lm | 900lm | 850lm |
| | 21452 | Black | | | | | | |
| | 21453 | Satin Chrome | | | | | | |








## Surface Socket

- 10A Surface Mount plug
- Designed for easy installation
- Snap-On Plate for fast and efficient mounting
- Highly durable






| Item No. | Variants |
|---|---|
| SURFACE-SOCKET | 20949 |

## Deco Series

- Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.




DECO-8-RND




DECO-13-RND








**Cutout: Ø70-75mm**




**Cutout: Ø90mm**

| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Alu | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| DECO-8 | 20411 | 20412 | 20410 | 8W | 44 | TRIO | 700lm | 750lm | 800lm |
| | DALI | | | | | | | | |
| | 21586 | 21587 | 21585 | | | | | | |
| DECO-13-RND | 20421 | 20422 | 20420 | 13W | 44 | TRIO | 1186lm | 1306lm | 1237lm |
| | DALI | | | | | | | | |
| | 21589 | 21590 | 21588 | | | | | | |



DECO-13-RND-WHT

## Deco Series


- Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.




DECO-13-SQR




DECO-13T








**Cutout: Ø90mm**




**Cutout: Ø95mm**

| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Alu | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| DECO-13-SQR | 20528 | 20427 | 20425 | 13W | 44 | TRIO | 1186lm | 1306lm | 1237lm |
| | DALI | | | | | | | | |
| | 21592 | 21593 | 21591 | | | | | | |
| DECO-13-TILT | 21045 | N/A | 20430 | 13W | 44 | TRIO | 1186lm | 1306lm | 1237lm |
| | DALI | | | | | | | | |
| | 21668 | N/A | 21667 | | | | | | |






## Deco Series


- Anti-glare frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.




DECO-20




**Cutout: Ø160 - Ø170mm**

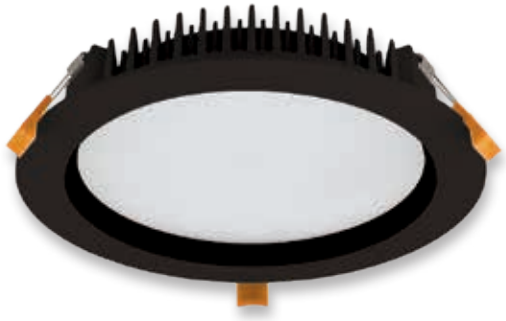

DECO-28




**Cutout: Ø200 - Ø210mm**

| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| DECO-20 | 20433 | 20432 | 20W | 44 | TRIO | 1700lm | 1750lm | 1800lm |
| | DALI | | | | | | | |
| | 21595 | 21594 | | | | | | |
| DECO-28 | 20435 | 20434 | 28W | 44 | TRIO | 2300lm | 2350lm | 2400lm |
| | DALI | | | | | | | |
| | 21597 | 21596 | | | | | | |

## Deco Series


Replacement 1yr Warranty

- 140mm Adaptor plate to suit Deco-13 (Fixed version only).
- Cast Aluminium, powder coated.
- Ideal for covering larger holes from Ø100-130mm.



DECO-13-ADAP






| Item No. | Variants | |
|---|---|---|
| | Blk | Wht |
| DECO-ADAP | 20507 | 20504 |











## Tek Series

Multi CCT Trio Technology 3 Colours in 1


Flicker Free Driver · Dimmable · 90° Beam Angle · Replacement 5yr Warranty · IC-4

- Flat face frame.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.




TEK-13






**Ø90mm Cutout**



| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Schr | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| TEK-13 | 20621 | 20445 | 20443 | 13W | 44 | TRIO | 800lm | 850lm | 900lm |
| | DALI | | | | | | | | |
| | 21599 | 21600 | 21598 | | | | | | |

## Aqua Series


- COB LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Suitable for wet areas, IP65*.
- DALI option now available, production lead times apply.




AQUA-10-WHT



AQUA-13-BLK




**Cutout: Ø75-80mm**




**Cutout: Ø90-95mm**

| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | Warm White | Neutral White | White |
| | Blk | Wht | Blk | Wht | | | | 3000K | 4000K | 5000K |
| AQUA-10 | 21270 | 21271 | 21287 | 21288 | 10W | 65* | TRIO | 870lm | 980lm | 930lm |
| AQUA-13 | 21272 | 21273 | 21289 | 21290 | 13W | 65* | TRIO | 1130lm | 1300lm | 1220lm |

*Downlight housing has been tested and is rated at IP65. Test conducted in an installed application from the underside of the downlight.*








## Aqua Series

- COB LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Suitable for wet areas, IP65*.
- DALI option now available, production lead times apply.



AQUA-13-TILT






**Tilt: 30°**
**Cutout: Ø90-95mm**

| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | Warm White | Neutral White | White |
| | Blk | Wht | Blk | Wht | | | | 3000K | 4000K | 5000K |
| AQUA-13-TILT | 21274 | 21278 | 21291 | 21292 | 13W | 65* | TRIO | 1130lm | 1300lm | 1220lm |

*Downlight housing has been tested and is rated at IP65. Test conducted in an installed application from the underside of the downlight.*


## Cell 9

- COB LED Chip.
- Interchangeable lens.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.
- A replaceable solution to re-lamp when used with compatible frames.
- CRI 90










| Item No. | Variants | | IP Rating | CCT - Lumen Output | | | | |
|---|---|---|---|---|---|---|---|---|
| | Standard | DALI | | 2700K | 3000K | 4000K | 5000K | 5700K |
| CELL-9-5CCT | 26980 | 21637 | 44 | 60° | | | | |
| | | | | 649lm | 660lm | 717lm | 755lm | 772lm |
| | 26981 | 21638 | 44 | 36° | | | | |
| | | | | 640lm | 651lm | 738lm | 749lm | 766lm |
| | 26982 | 21639 | 44 | 24° | | | | |
| | | | | 681lm | 688lm | 748lm | 788lm | 807lm |
| | 26983 | 21640 | 44 | 15° | | | | |
| | | | | 656lm | 662lm | 717lm | 757lm | 772lm |










## Cell 13

- COB LED Chip.
- Interchangeable lens.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.
- A replaceable solution to re-lamp when used with compatible frames.
- CRI 90












| Item No. | Variants | | IP Rating | CCT - Lumen Output | | | | |
|---|---|---|---|---|---|---|---|---|
| | Standard | DALI | | 2700K | 3000K | 4000K | 5000K | 5700K |
| CELL-13-5CCT | 26984 | 21641 | 44 | 60° | | | | |
| | | | | 1002lm | 995lm | 1098lm | 1163lm | 1145lm |
| | 26985 | 21642 | 44 | 36° | | | | |
| | | | | 990lm | 1000lm | 1077lm | 1120lm | 1137lm |
| | 26986 | 21643 | 44 | 24° | | | | |
| | | | | 1037lm | 1030lm | 1108lm | 1154lm | 1175lm |
| | 26987 | 21644 | 44 | 15° | | | | |
| | | | | 965lm | 975lm | 1050lm | 1092lm | 1160lm |

## Choose a module




9W-13W

## Choose a frame


P75 - K75



D75




T75




T90




D90




DT90




W90




S1




S2



S3



## Press down firmly until module clicks into frame.















## Multiple Combinations

CELL-K75 & P75





*Cutout: Ø70-75mm*

CELL-D75





*Cutout:Ø75-77mm*

CELL-T75





*Cutout: Ø72-75mm*
*Tiltable to 15°*

CELL-D90 & DT90





*Cutout:Ø90-92mm*
*DT90 Tiltable to 15°*

CELL-T90





*Cutout: Ø85-90mm*
*Tiltable to 15o*

CELL-W90





*Cutout: Ø88-90mm*
*W90 wall washer frame is set at a 45° angle.*

CELL-S1





*Cutout: L100mm x W100mm*

CELL-S2




*Cutout: L190mm x W100mm*

CELL-S3

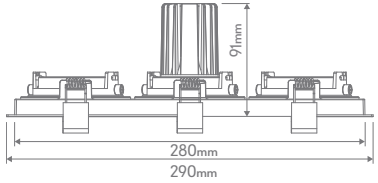


*Cutout: L280mm x W100mm*

# LED Module Downlights



CELL-P75



CELL-K75




CELL-T75



CELL-D75



CELL-W90



CELL-T90



CELL-DT90



CELL-D90



CELL-S1




CELL-S2



CELL-S3

| Item No. | Variants | Frame Colour |
|---|---|---|
| CELL-D75 | 27048 | White |
| | 27049 | Black |
| CELL-D90 | 27050 | White |
| | 27051 | Black |
| CELL-DT90 | 27078 | White |
| | 27079 | Black |
| CELL-T75 | 27052 | White |
| | 27053 | Black |
| CELL-T90 | 27054 | White |
| | 27055 | Black |
| CELL-K75 | 27064 | White |
| | 27065 | Black |
| CELL-P75 | 27062 | White |
| | 27063 | Black |
| CELL-W90 | 27056 | White |
| | 27057 | Black |
| CELL-S1 | 27058 | White |
| | 27059 | Black |
| CELL-S2 | 27060 | White |
| | 27061 | Black |
| CELL-S3 | 27070 | White |
| | 27071 | Black |

*Please note the codes above are for frames only.*

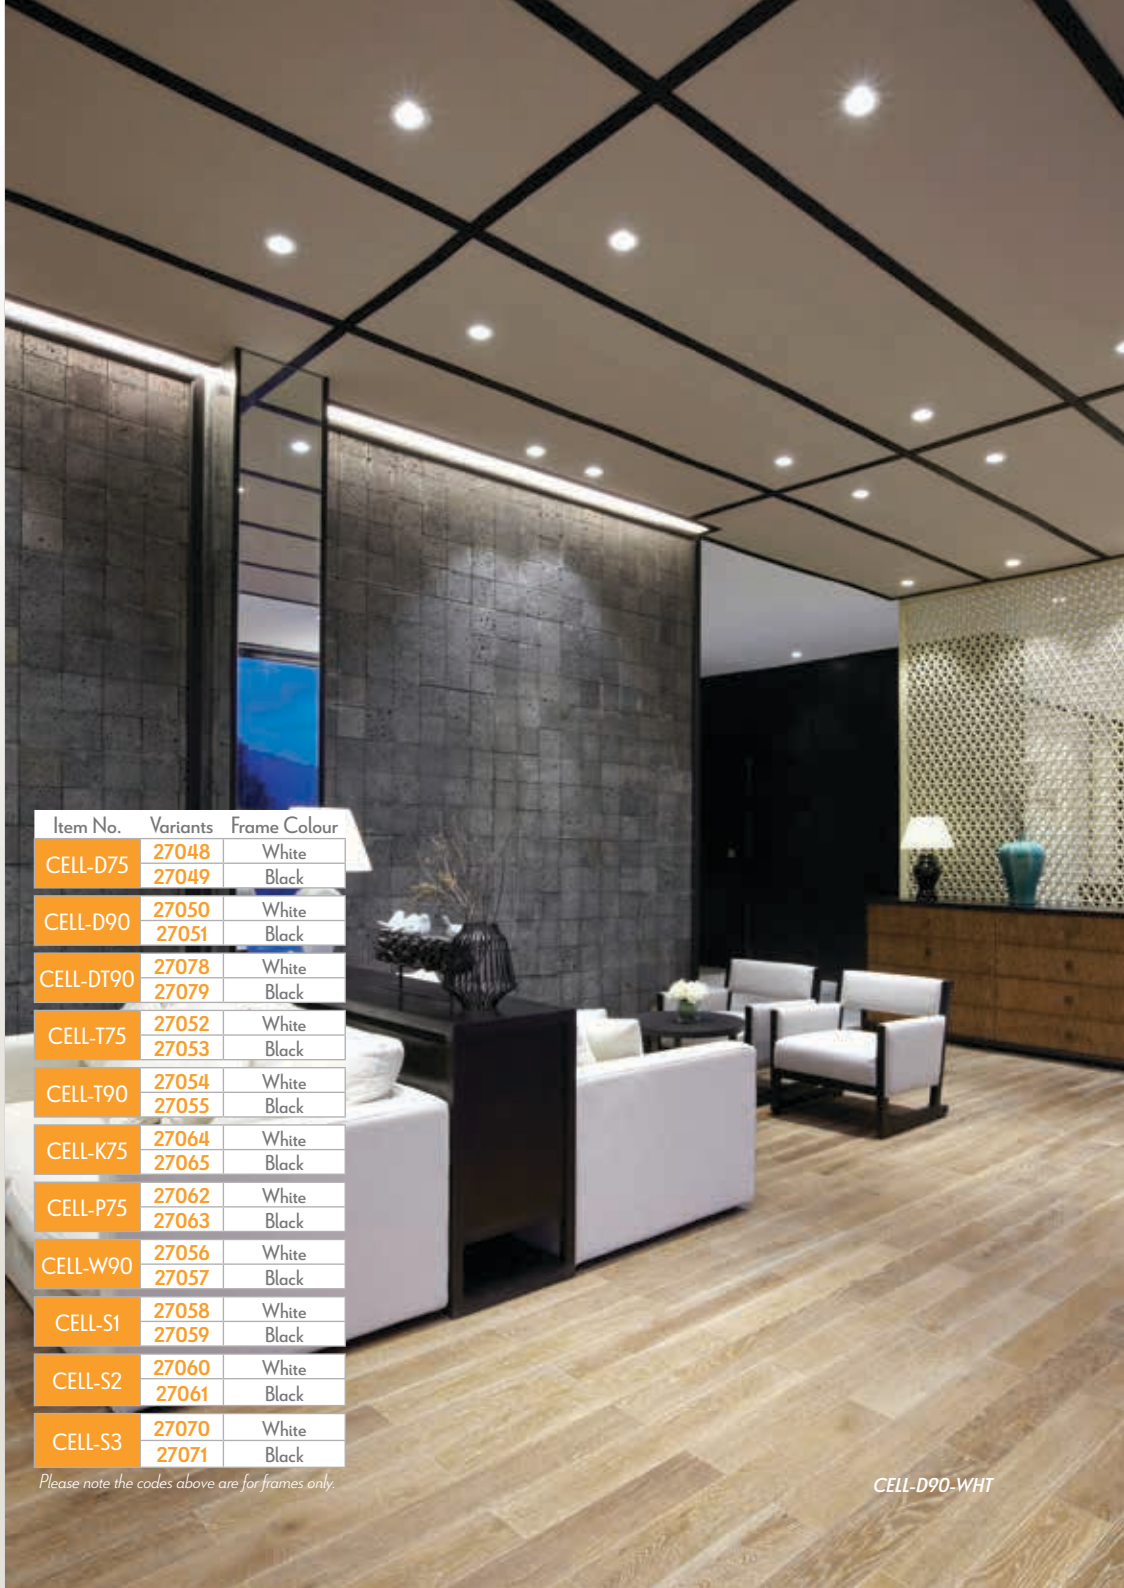


**CELL-D90-WHT**

## Deep Series

- SMD LED Chip.
- Anti-glare deep-set frame.
- Polyamide frame, Cast Aluminium heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.



DEEP-9-WHT




**Cutout: Ø88-Ø90mm**




| Item No. | Variants | | CCT | Wattage | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Standard | DALI | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| DEEP-9 | 20815 | 20816 | TRIO | 9W | 54 | 840lm | 964lm | 920lm |



DEEP-13-WHT

## Deep Series


- COB LED Chip.
- Anti-glare deep-set frame.
- Tiltable.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.




DEEP-10-WHT



DEEP-12-BLK

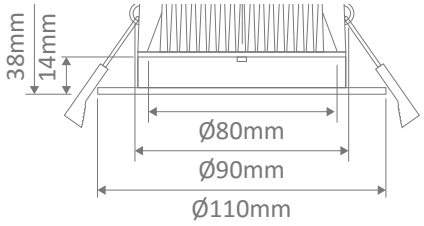


Cutout: Ø90mm

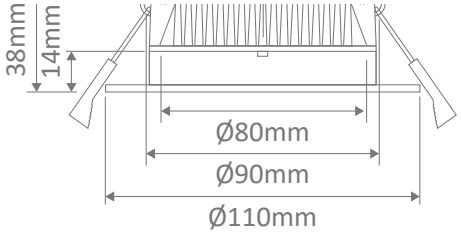


| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| | Blk | Wht | Blk | Wht | | | | | | |
| DEEP-10 | 21729 | 21730 | 21733 | 21734 | 10W | 40 | TRIO | 993lm | 1053lm | 1017lm |
| DEEP-12 | 21731 | 21732 | 21738 | 21736 | 12W | 40 | TRIO | 1174lm | 1289lm | 1202lm |





## Scoop Series


- COB LED Chip.
- Adjustable and Directional.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.




SCOOP-13-BLK



SCOOP-25-WHT




Cutout: Ø85mm

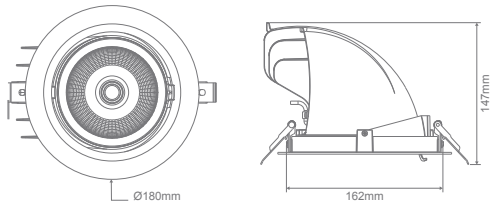


Cutout: Ø160mm - Ø170mm


| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| | Blk | Wht | Blk | Wht | | | | | | |
| SCOOP-13 | 20466 | 20468 | 20467 | 20469 | 13W | 20 | TRIO | 780lm | 880lm | 870lm |
| SCOOP-25 | 20470 | 20472 | 20471 | 20473 | 25W | 20 | TRIO | 2010lm | 2231lm | 2230lm |

## Expo Series

- Anti-glare deep-set frame.
- Low UGR ≤ 19.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply
- CRI 90




EXPO-10




Cutout: Ø90-95mm



EXPO-25

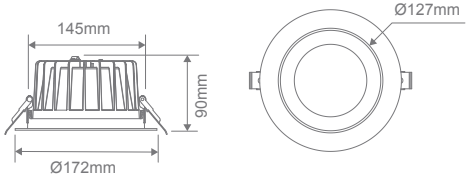


Cutout: Ø150-165mm

| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| | Blk | Wht | Blk | Wht | | | | | | |
| EXPO-10 | 20710 | 20711 | 21602 | 21601 | 10W | 44 | TRIO | 710lm | 780lm | 850lm |
| EXPO-25 | 20712 | 20713 | 21604 | 21603 | 25W | 44 | TRIO | 2200lm | 2400lm | 2600lm |





## Expo Series


- Anti-glare deep-set frame.
- Low UGR ≤ 19.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.
- CRI 90



EXPO-35



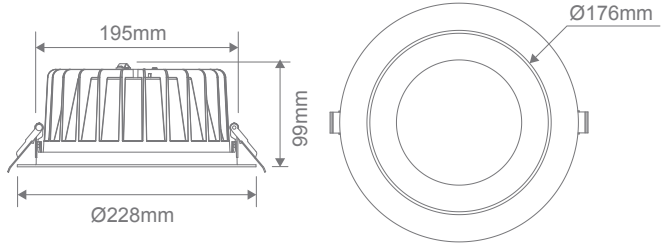


Cutout: Ø200-210mm

| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| | Blk | Wht | Blk | Wht | | | | | | |
| EXPO-35 | 20714 | 20715 | 21606 | 21605 | 35W | 44 | TRIO | 3650lm | 3750lm | 3850lm |

## Neo Pro Recessed Series

- SMD LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- Anti-glare deep set frame, frosted diffuser
- DALI option now available, production lead times apply.



NEO-PRO-35-REC

NEO-PRO-25-REC

NEO-PRO-13-REC




| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | | | |
| | Blk | Wht | Blk | Wht | | | | 3000K | 4000K | 5700K |
| NEO-PRO-13-REC | 20915 | 20916 | 21608 | 21607 | 13W | 65 | TRIO | 850lm | 1000lm | 900lm |
| NEO-PRO-25-REC | 20917 | 20918 | 21610 | 21609 | 25W | 65 | TRIO | 2250lm | 2400lm | 2300lm |
| NEO-PRO-35-REC | 20919 | 20920 | 21612 | 21611 | 35W | 65 | TRIO | 3200lm | 3400lm | 3300lm |




LED Downlights


Interior

Neo Pro Recessed Series


- SMD LED Chip.
- Cast Aluminium frame and heat sink.
- Fully dimmable with suitable dimmers.
- DALI option now available, production lead times apply.

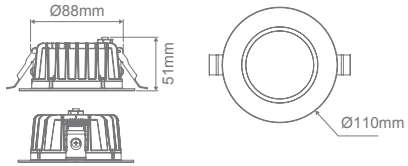


**Cutout: Ø90-95mm**

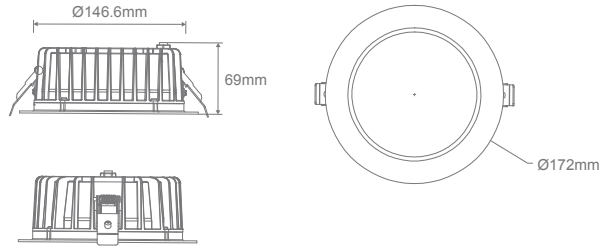


**Cutout: Ø150-165mm**

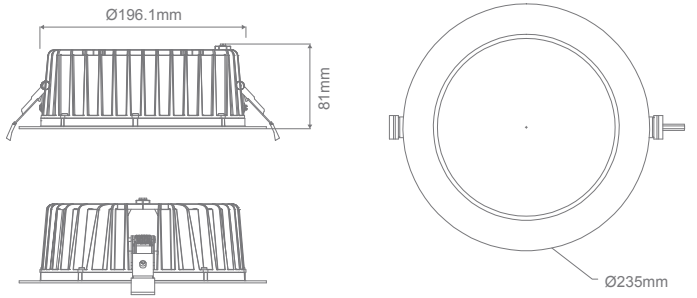


**Cutout: Ø200-220mm**

## Moon Recessed Series


- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.
- CRI 90




MOON-REC-SPOT



MOON-REC-TUBE




**Cutout: Ø110mm**




**Cutout: Ø110mm**

| Item No. | | Variants Blk | Variants Wht | Wattage | IP | CCT |
|---|---|---|---|---|---|---|
| MOON-REC | FLD | 22804 | 22805 | 6/9W | 20 | TRIO |
| | OPAL | 22806 | 22807 | | | |
| | SPOT | 22808 | 22809 | | | |
| | TUBE | 22810 | 22811 | | | |









MOON-REC-OPAL




MOON-REC-FLD




**Cutout: Ø110mm**




**Cutout: Ø110mm**

6W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| *Fld-60°* | *Opal-130°* | *Spot-30°* | *Tube-60°* | *Fld-60°* | *Opal-130°* | *Spot-30°* | *Tube-60°* | *Fld-60°* | *Opal-130°* | *Spot-30°* | *Tube-60°* |
| 477lm | 433lm | 498lm | 430lm | 556lm | 504lm | 534lm | 504lm | 561lm | 513lm | 536lm | 515lm |

9W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| *Fld-60°* | *Opal-130°* | *Spot-30°* | *Tube-60°* | *Fld-60°* | *Opal-130°* | *Spot-30°* | *Tube-60°* | *Fld-60°* | *Opal-130°* | *Spot-30°* | *Tube-60°* |
| 651lm | 600lm | 661lm | 593lm | 780lm | 719lm | 756lm | 716lm | 775lm | 729lm | 751lm | 708lm |

## Pico Series


- Complete with driver.
- Cast Aluminium frame and heat sink.
- DALI option now available, production lead times apply.




PICO-3-WHT





PICO-3-TILT-WHT




**Cutout: Ø35mm**
**Driver fits through cutout hole**




**Cutout: Ø45mm - Tilt: 20°**
**Driver fits through cutout hole**

| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | | | |
| | Blk | Wht | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| PICO-3 | 21575 | 21576 | 21662 | 21661 | 3W | 40 | TRIO | 180lm | 210lm | 210lm |
| PICO-3-TILT | 21577 | 21578 | 21664 | 21663 | 3W | 40 | TRIO | 180lm | 210lm | 210lm |




LED Cabinet Lights

Interior

Pico Series

- Complete with driver.
- Cast Aluminium frame and heat sink.
- DALI option now available, production lead times apply.




**Cutout: Ø50mm**
**Driver fits through cutout hole**



PICO-7



| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Standard | | DALI | | | | | | | |
| | Blk | Wht | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| PICO-7 | 21581 | 21582 | 21666 | 21665 | 7W | 40 | TRIO | 390lm | 470lm | 460lm |

## Astra Trio Series

- Recessed / Surface Mounted Installation options in one fitting.
- 12V DC Constant Voltage LED Driver required.


*Recessed Application*



*Surface Mounted Application*



*Surface Mounted*

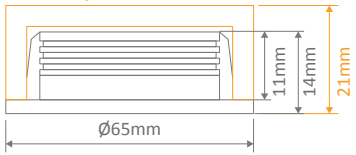


**Recessed Cutout: Ø57mm**

| Item No. | Variants | | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | Blk | Slr | Wht | Sbrs | Chr | | | | 3000K | 4000K | 5000K |
| ASTRA-TRIO | 21517 | 21518 | 21516 | 21519 | 21520 | 3.6W | 20 | TRIO | 200lm | 230lm | 205lm |

*Requires 12V DC Constant Voltage LED Driver - Wire in Parallel*



*ASTRA-TRIO*

## Moon Surface Mounted Series


- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.
- CRI 90




MOON-SM-SPOT



MOON-SM-TUBE




| Item No. | | Variants Blk | Variants Wht | Wattage | IP | CCT |
|---|---|---|---|---|---|---|
| MOON-SM | FLD | 22812 | 22813 | 6/9W | 20 | TRIO |
| | OPAL | 22814 | 22815 | | | |
| | SPOT | 22816 | 22817 | | | |
| | TUBE | 22818 | 22819 | | | |





LED Surface Mounted Downlights


Interior




MOON-SM-OPAL




MOON-SM-FLD




6W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 477lm | 433lm | 498lm | 430lm | 556lm | 504lm | 534lm | 504lm | 561lm | 513lm | 536lm | 515lm |

9W - Lumen Output


| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 651lm | 600lm | 661lm | 593lm | 780lm | 719lm | 756lm | 716lm | 775lm | 729lm | 751lm | 708lm |

## Neo Pro Surface Mounted Series

- SMD LED Chip.
- Cast Aluminium frame.
- Fully dimmable with suitable dimmers.
- Anti-glare deep set frame, frosted diffuser.
- DALI dimming (Remote Driver) optional extra upon request.




NEO-PRO-13-SM

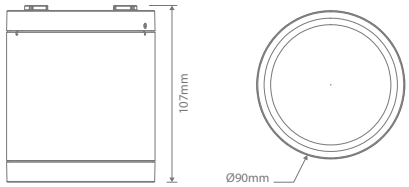




NEO-PRO-25-SM

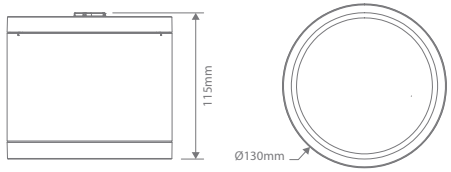


| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | 3000K | 4000K | 5700K |
| NEO-PRO-13-SM | 20890 | 20891 | 13W | 65 | TRIO | 1000lm | 1200lm | 1100lm |
| NEO-PRO-25-SM | 20892 | 20893 | 25W | 65 | TRIO | 2200lm | 2400lm | 2300lm |



LED Surface Mounted Downlights


Interior

## Neo Pro Surface Mounted Series


- SMD LED Chip.
- Cast Aluminium frame.
- Fully dimmable with suitable dimmers.
- Anti-glare deep set frame, frosted diffuser.
- DALI dimming (Remote Driver) optional extra upon request.




NEO-PRO-35-SM

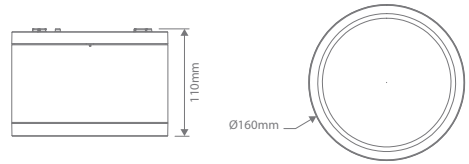


| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | 3000K | 4000K | 5700K |
| NEO-PRO-35-SM | 20894 | 20895 | 35W | 65 | TRIO | 3000lm | 3200lm | 3100lm |

## Neo Surface Mounted Tilt Series


- COB LED Chip.
- Cast Aluminium frame.
- Adjustable and Directional.
- Fully dimmable with suitable dimmers.
- DALI dimming (Remote Driver) optional extra upon request.



NEO-SM-10-TILT



NEO-SM-10-TILT




| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| NEO-10-SM-TILT | 21294 | 21298 | 10W | 20 | TRIO | 880lm | 960lm | 945lm |







## Neo Surface Mounted Tilt Series


- COB LED Chip.
- Cast Aluminium frame.
- Adjustable and Directional.
- Fully dimmable with suitable dimmers.
- DALI dimming (Remote Driver) optional extra upon request.



NEO-SM-20-TILT



NEO-SM-20-TILT




| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| NEO-20-SM-TILT | 21296 | 21297 | 20W | 20 | TRIO | 1950lm | 2030lm | 1920lm |


## Pistol Series

- COB LED Chip.
- Adjustable and Directional.
- Cast Aluminium frame, powder coated.
- Fully dimmable with suitable dimmers.



PISTOL-15



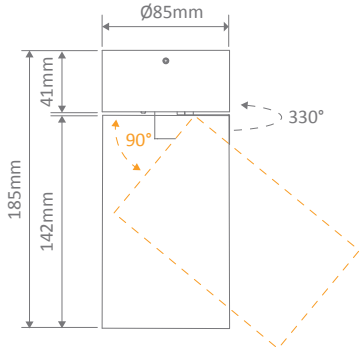


| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| PISTOL-15 | 20365 | 20366 | 15W | 20 | TRIO | 1230lm | 1420lm | 1385lm |








## Pistol Series

- COB LED Chip.
- Adjustable and Directional.
- Cast Aluminium frame, powder coated.
- Fully dimmable with suitable dimmers.



PISTOL-25



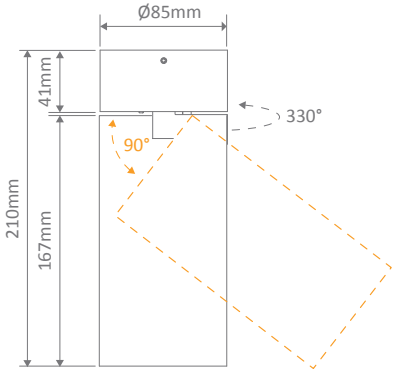


| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| PISTOL-25 | 20367 | 20368 | 25W | 20 | TRIO | 2370lm | 2570lm | 2440lm |

## LED Filament Series


IP Rating 64 · Dimmable · Replacement 3yr Warranty




LF-A60-CLR-E27



LF-A60-FRS-B22




| Item No. | Variants | | Watt | | Watt Equiv. | CCT | Lamp Base | CRI | Lumen Output | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | *Clr* | *Frst* | *Clr* | *Frst* | | | | | *Clr* | *Frst* | |
| LF-A60 | 65932 | 65976 | 7.8W | 8.5W | 75W | 2700K | E27 | ≥80 | 1055lm | 1055lm | 15,000h |
| | 65933 | 65977 | | | | 6500K | | | 1050lm | 1055lm | |
| | 65930 | 65974 | | | | 2700K | B22 | | 1055lm | 1055lm | |
| | 65931 | 65975 | | | | 6500K | | | 1050lm | 1055lm | |







## LED Filament Series


Dimmable · Replacement 3yr Warranty




LF-G95-CLR-E27



LF-G95-FRS-B22




| Item No. | Variants | | Watt | | Watt Equiv. | CCT | Lamp Base | CRI | Lumen Output | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | *Clr* | *Frst* | *Clr* | *Frst* | | | | | *Clr* | *Frst* | |
| LF-G95 | 65940 | 65984 | 7.2W | 8.5W | 75W | 2700K | E27 | ≥80 | 806lm | 1055lm | 15,000h |
| | 65941 | 65985 | | | | 6500K | | | 860lm | 1055lm | |
| | 65938 | 65982 | | | | 2700K | B22 | | 806lm | 1055lm | |
| | 65939 | 65983 | | | | 6500K | | | 860lm | 1055lm | |


## LED Filament Series




LF-G120-CLR-E27



LF-G120-FRS-B22

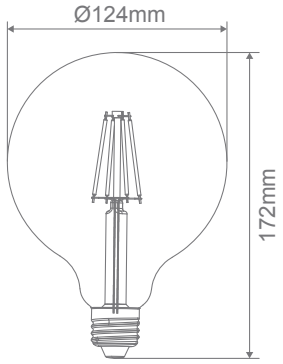

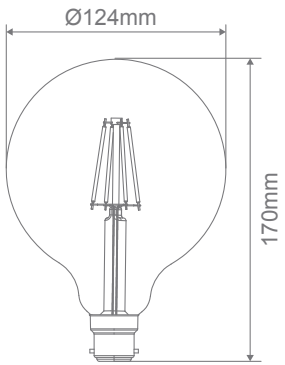
| Item No. | Variants | | Watt | | Watt Equiv. | CCT | Lamp Base | CRI | Lumen Output | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | Clr | Frst | Clr | Frst | | | | | Clr | Frst | |
| LF-G120 | 65944 | 65988 | 7.8W | 8.5W | 75W | 2700K | E27 | ≥80 | 1055lm | 1055lm | 15,000h |
| | 65945 | 65989 | | | | 6500K | | | 1055lm | 1050lm | |
| | 65942 | 65986 | | | | 2700K | B22 | | 1055lm | 1055lm | |
| | 65943 | 65987 | | | | 6500K | | | 1055lm | 1050lm | |











## LED Filament Series




LF-G45-CLR-E14


LF-G45-FRS-B15



LF-C35-CLR-E14

LF-C35-FRS-B15

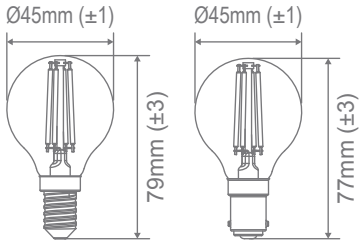




| Item No. | Variants | | Watt | Watt Equiv. | CCT | Lamp Base | CRI | Lumen Output | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|---|
| | Clr | Frst | | | | | | Clr | Frst | |
| LF-G45 | 65926 | 65970 | 4.2W | 75W | 2700K | E14 | ≥80 | 470lm | 470lm | 15,000h |
| | 65927 | 65971 | | | 6500K | | | 500lm | 470lm | |
| | 65928 | 65972 | | | 2700K | B15 | | 470lm | 470lm | |
| | 65929 | 65973 | | | 6500K | | | 500lm | 470lm | |

| Item No. | Variants | | Watt | Watt Equiv. | CCT | Lamp Base | CRI | Lumen Output | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|---|
| | Clr | Frst | | | | | | Clr | Frst | |
| LF-C35 | 65924 | 65968 | 4.2W | 75W | 2700K | E14 | ≥80 | 470lm | 470lm | 15,000h |
| | 65925 | 65969 | | | 6500K | | | 500lm | 470lm | |
| | 65922 | 65966 | | | 2700K | B15 | | 470lm | 470lm | |
| | 65923 | 65967 | | | 6500K | | | 500lm | 470lm | |


## LED Filament Series

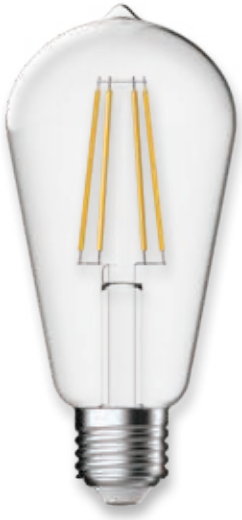


LF-ST64-CLR-E27

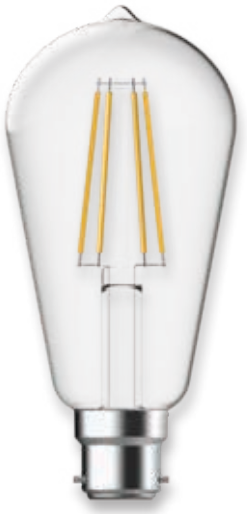

LF-ST64-CLR-B22




| Item No. | Variants Clr | Watt | Watt Equiv. | CCT | Lamp Base | CRI | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|---|---|
| LF-ST64 | 65936 | 7.2W | 75W | 2700K | E27 | ≥80 | 806lm | 15,000h |
| | 65937 | | | 6500K | | | 860lm | |
| | 65934 | | | 2700K | B22 | | 806lm | |
| | 65935 | | | 6500K | | | 860lm | |











## LED Retro Vintage Filament Lamp


- Banana shape.




LRF-T30-E27



LRF-T30-B22

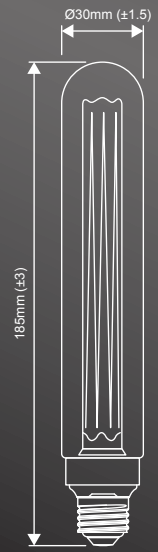

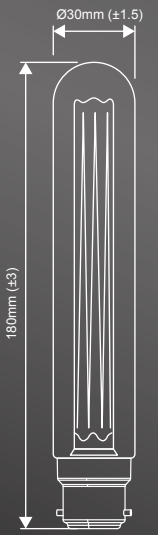

| Item No. | Variants | Watt | CCT | Lamp Base | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|
| LRF-T30 | 65961 | 2.3W | 1800K | E27 | 65lm | 15,000hrs |
| | 65960 | | | B22 | | |

## LED Retro Vintage Filament Lamp

- Mini-Banana shape.




LRF-T45-E27

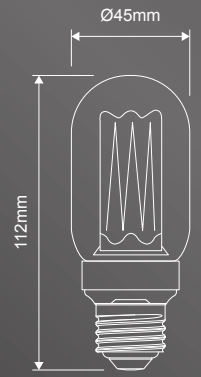




LRF-T45-B22

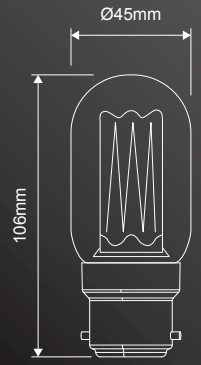


| Item No. | Variants | Watt | CCT | Lamp Base | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|
| LRF-T45 | 65963 | 3.5W | 1800K | E27 | 120lm | 15,000hrs |
| | 65962 | | | B22 | | |











## LED Retro Vintage Filament Lamp


- Pear shape.




LRF-ST64-E27



LRF-ST64-B22

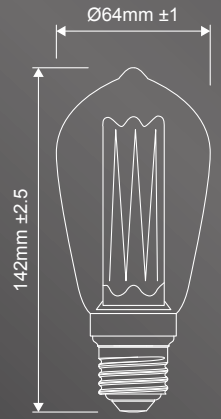

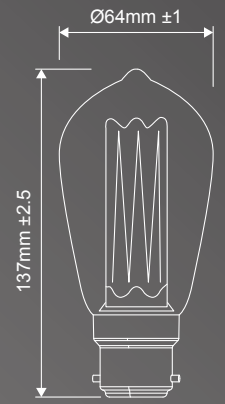
| Item No. | Variants | Watt | CCT | Lamp Base | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|
| LRF-ST64 | 65955 | 3.5W | 1800K | E27 | 120lm | 15,000hrs |
| | 65954 | | | B22 | | |

## LED Retro Vintage Filament Lamp


- G95 Spherical shape.




LRF-G95-E27



LRF-G95-B22

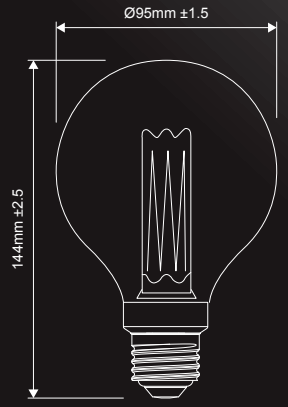

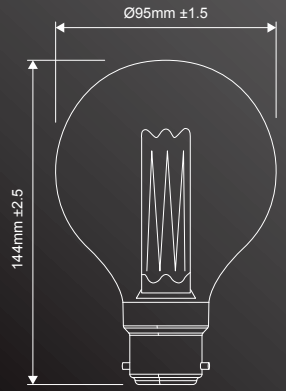
| Item No. | Variants | Watt | CCT | Lamp Base | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|
| LRF-G95 | 65957<br>65956 | 3.5W | 1800K | E27<br>B22 | 120lm | 15,000hrs |





LED Globes

Interior

## LED Retro Vintage Filament Lamp


- G125 Spherical shape.




LRF-G125-E27



LRF-G125-B22

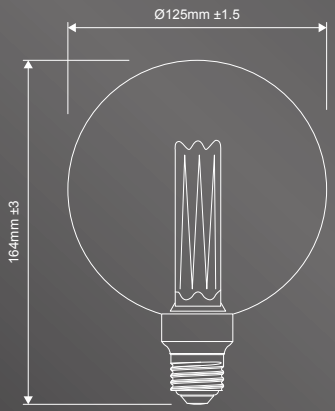

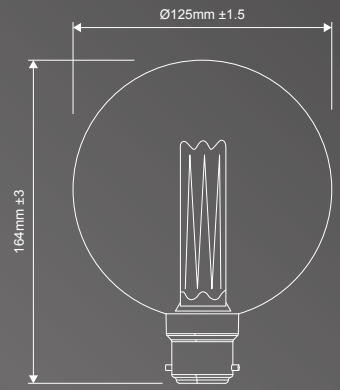




| Item No. | Variants | Watt | CCT | Lamp Base | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|
| LRF-G125 | 65959<br>65958 | 3.5W | 1800K | E27<br>B22 | 120lm | 15,000hrs |

## Key GLS 12V

- 12V DC Low Voltage LED A60 GLS Globe.
- 12V DC Constant Voltage LED Driver required.

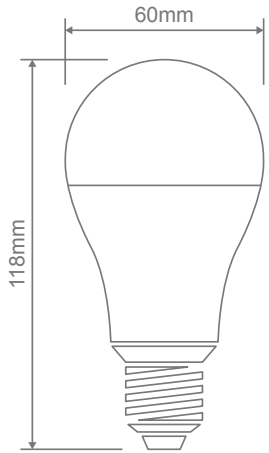




| Item No. | Variants | Watt | Watt Equiv. | CCT | Lamp Base | CRI | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|---|---|
| KEY-GLS-E27-12V | 65108 | 8W | 75W | 3000K | E27 | ≥80 | 720lm | 20,000hrs |
| | 65109 | | | 5000K | | | 720lm | |










## Key GLS TRIO

- Fully dimmable with suitable dimmers.




Available in these two bases




*KEY-GLS-TRIO*

| Item No. | Variants | | CCT | Wattage | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | E27 | B22 | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| KEY-GLS-TRIO | 65114 | 65116 | TRIO | 12W | 20 | 1050lm | 1150lm | 1150lm |

## Key G5.3 TRIO

- 4W LED 12V DC G5.3 Base Bi-Pin Lamp
- 12V DC Constant Voltage LED Driver required.




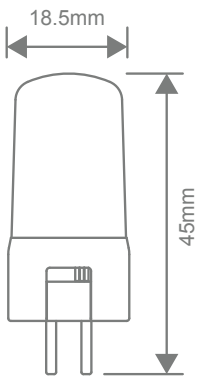


## Key G9 TRIO

- Fully dimmable with suitable dimmers.



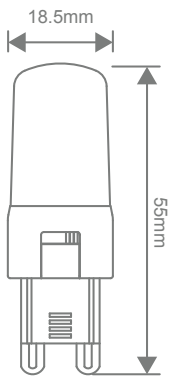


| Item No. | Variant | Watt | Beam Angle | CCT | CRI | Lumen Output Warm White 3000K | Lumen Output Neutral White 5000K | Lumen Output White 5000K | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| KEY-G5.3-TRIO | 65124 | 4W | 280° | TRIO | ≥90 | 330lm | 350lm | 330lm | 50,000hrs |
| KEY-G9-TRIO | 65126 | | | | | 330lm | 350lm | 330lm | |












## Key G9

- Fully dimmable with suitable dimmers.



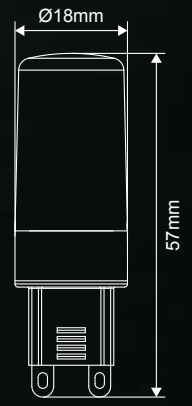




| Item No. | Variants 3000K | Variants 5000K | Watt | Beam Angle | CCT | CRI | Lumen Output Warm White 3000K | Lumen Output White 5000K | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| KEY-G9 | 65104 | 65106 | 3.5W | 280° | 3000K - 5000K | ≥80 | 280lm | 300lm | 15,000hrs |

## Key MR11-3

- MR11 shape G5.3 base.
- 38° Beam Angle.
- 12V DC Constant Voltage LED Driver required.






| Item No. | Variant 3000K | Variant 6000K | Watt | Beam Angle | CCT | CRI | Lumen Output Warm White 3000K | Lumen Output Daylight 6000K | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| KEY-MR11 | 65016 | 65017 | 3W | 38° | 3000K - 6000K | ≥80 | 240lm | 240lm | 35,000hrs |










## Key MR16 Glass

- MR16 shape GU5.3 base.
- 60° Beam Angle.
- 12V DC Constant Voltage LED Driver required.







| Item No. | Variant 3000K | Variant 5000K | Watt | Beam Angle | CCT | CRI | Lumen Output Warm White 3000K | Lumen Output White 5000K | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| KEY-MR16-GLASS | 65100 | 65102 | 4.7W | 60° | 3000K - 5000K | ≥80 | 390lm | 420lm | 15,000hrs |

## Key GU10 Glass

- GU10 shape.
- 60° Beam Angle.






| Item No. | Variant 3000K | Variant 5000K | Watt | Beam Angle | CCT | CRI | Lumen Output Warm White 3000K | Lumen Output White 5000K | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| KEY-GU10-GLASS | 65096 | 65098 | 6.2W | 60° | 3000K - 5000K | ≥80 | 520lm | 540lm | 15,000hrs |









## Key MR16 & GU10 TRIO


- 12V DC Constant Voltage LED Driver required.




KEY-MR16-TRIO



KEY-GU10-TRIO




| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output Warm White 3000K | Lumen Output Neutral White 4000K | Lumen Output White 6500K | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| KEY-GU10-TRIO | 65112 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |
| KEY-MR16-TRIO | 65122 | | | | | | | | |

## Key T40 TRIO


- Fully dimmable with suitable dimmers.




KEY-T40-TRIO-E27



KEY-T40-TRIO-B22




| Item No. | Variants E27 | Variants B22 | Watt | Beam Angle | CCT | CRI | Lumen Output Warm White 3000K | Lumen Output Neutral White 4000K | Lumen Output White 6500K | Lifetime |
|---|---|---|---|---|---|---|---|---|---|---|
| KEY-T40-TRIO | 65118 | 65120 | 8W | 220° | TRIO | ≥80 | 650lm | 720lm | 720lm | 15,000hrs |










## Key-PAR Series




KEY-PAR-30



KEY-PAR-38



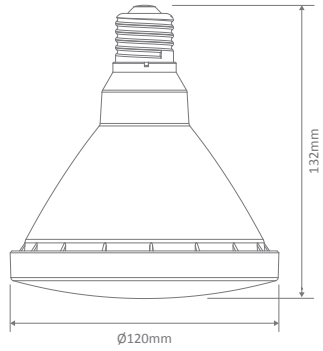
| Item No. | Variants | Watt | Watt Equiv. | IP Rating | CCT | Cap | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|---|---|
| KEY-PAR-30 | 65130 | 10W | 75W | 65 | 3000K | E27 | ≥80 | 900lm | 1000lm | 950lm | 30,000hrs |


| Item No. | Variants | Watt | Watt Equiv. | IP Rating | CCT | Cap | CRI | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| KEY-PAR-38 | 65195 | 16W | 90W | 44 | 3000K | E27 | ≥80 | 1350lm | 30,000hrs |
| | 65197 | | | | 5000K | | | 1400lm | |

# How to build a profile

## 1- Choose your application and profile





## 2- Finish colour



Black | Anodised Aluminium | White

## 3- Measure the area of application

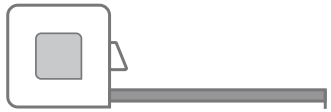

## 4- Choose the desired light output

*(wattage and colour temperature from selected range "LED Strip")*




## 5- Choose your driver

*(from selected range "LED Drivers")*

**twr = wpm x l + 20%**

| | |
|---|---|
| twr = | total wattage required |
| wpm = | watts per metre |
| l = | length |

















## Bloc 20

| Specification | |
|---|---|
| **Installation:** | Surface, wall or suspension mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Square (PMMA) Opal colour |
| **Length:** | 2500mm continuous* |
| **Size:** | Profile (W) 19.7mm, (H) 19.6mm |
| **Accessories:** | Wire suspensions** |
| **Special:** | Custom powder coated colour upon request*** |
| **Driver installation:** | Remote driver required |

* *Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps & mounting clips.*

** *Accessories to be ordered separately.*

*** *Special powder coat finishes upon request. Surcharges apply.*






*Aluminium*



*White*




*Suspension Kit*

**Compatible PLEX-COB LED Strip**

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Item No | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| BLOC-20-SM | 22068 | 22010 | 22069 | Sold per 1 metre |
| SUSP-KIT-2M | 22041 | | | 2 Metres standard height, sold individually |

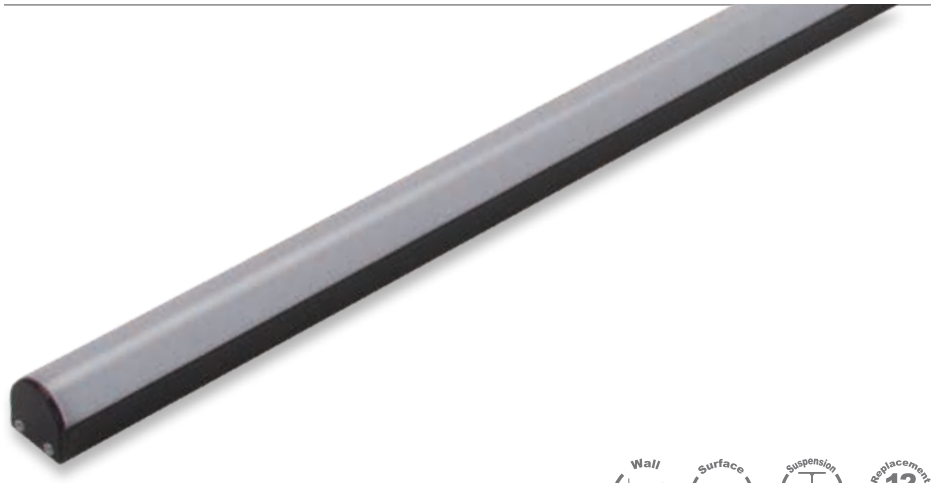

Wall Surface Suspension Replacement 12 month Warranty


## Curve 20

| Specification | |
|---|---|
| **Installation:** | Surface, wall or suspension mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Curved (PMMA) Opal colour |
| **Length:** | 2500mm continuous* |
| **Size:** | Profile (W) 19.7mm (H) 19.6mm |
| **Accessories:** | Wire suspensions** |
| **Special:** | Custom powder coated colour upon request*** |
| **Driver** | Remote driver required |

* *Profile sold per metre. Can be cut to suit any length up to 2.5m. Endcaps & mounting clips.*

** *Accessories to be ordered separately.*

*** *Special powder coat finishes upon request. Surcharges apply.*






*Aluminium*



*White*



*Suspension Kit*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| CURVE-20-SM | 22066 | 22008 | 22067 | Sold per 1 metre |
| SUSP-KIT-2M | 22041 | | | 2 Metres standard height, sold individually |












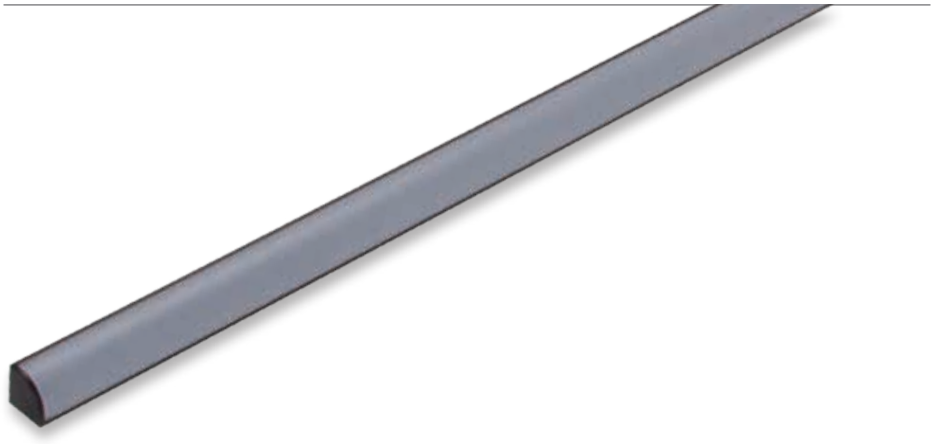


Surface Replacement 12 month Warranty

## Corner 16 RND

| Specification: | |
|---|---|
| **Installation:** | Surface mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Curved (PMMA) Opal/Frost colour |
| **Length:** | 2500mm continuous* |
| **Size:** | Profile (W) 16mm, (H) 16mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

* *Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps & mounting clips.*

** *Special powder coat finishes upon request. Surcharges apply.*




### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

**Does not fit the IP67 version of this strip*



*Simulation*




*Aluminium*



*White*

| Profile | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| CORNER-16-RND | 22070 | 22026 | 22071 | Sold per 1 metre |

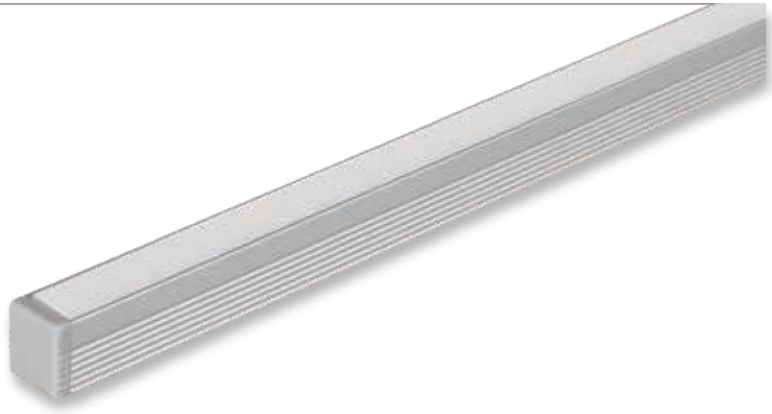


Wall Surface Replacement 12 month Warranty

## Micro SM

| Specification | |
|---|---|
| **Installation:** | Surface or wall mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) High Output Opal/Frost colour |
| **Length:** | 2000mm continuous* |
| **Size:** | Profile (W) 8mm, (H) 9mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 2m. Includes Endcaps & mounting clips.*

*** Special powder coat finishes upon request. Surcharges apply.*






*Black* *Aluminium* *White*

| Profile | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| MICRO-SM | 21941 | 21940 | 21942 | Sold per 1 metre |

*Compatible with PLEX-MICRO-8W LED Strip*












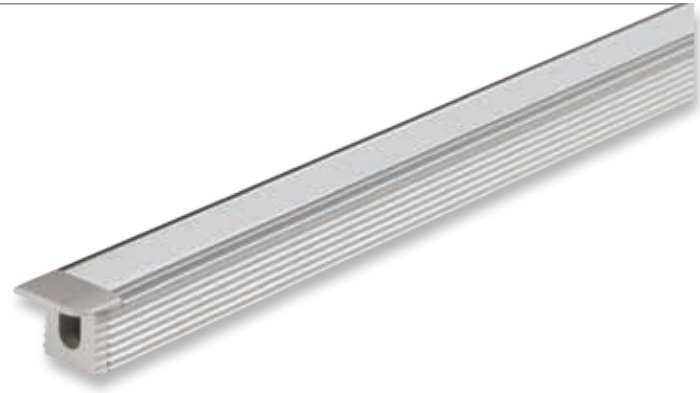


Recessed Replacement 12 month Warranty


## Micro REC

| Specification | |
|---|---|
| **Installation:** | Recess mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) High Output Opal/Frost colour |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 10.9mm, (H) 9.1mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes endcaps.*

*** Special powder coat finishes upon request. Surcharges apply.*




*Black* *Aluminium* *White*

| Profile | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| MICRO-REC | 21957 | 21956 | 21958 | Sold per 1 metre |

*Compatible with PLEX-MICRO-8W LED Strip*

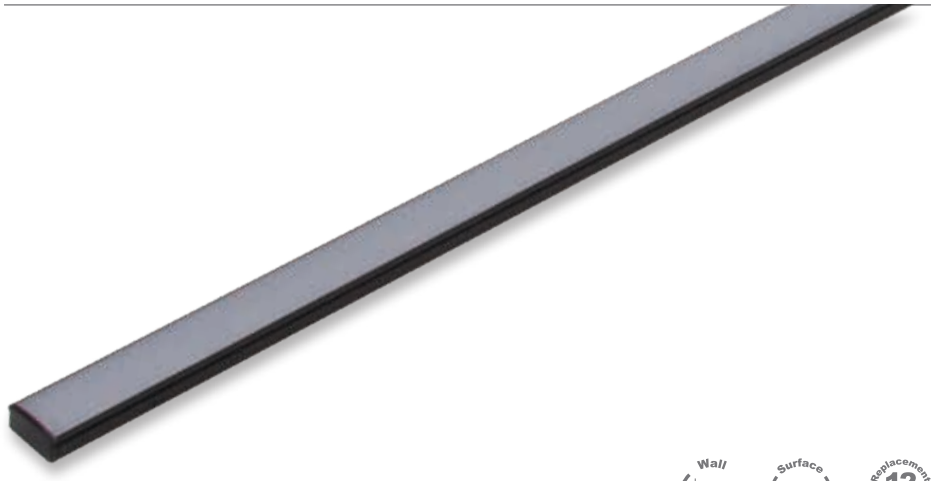


Wall Surface Replacement 12 month Warranty

## Nova 17 SM

| Specification | |
|---|---|
| **Installation:** | Surface or wall mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) High Output Opal/Frost colour |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 17mm, (H) 8mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes Endcaps & mounting clips.*

*** Special powder coat finishes upon request. Surcharges apply.*






*Aluminium* *White*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

**Does not fit the IP67 version of this strip*

| Profile | Length | Variants | | |
|---|---|---|---|---|
| | | Blk | Alu | Wht |
| NOVA-17-SM | 1 Metre | 22078 | 22045 | 22079 |
| | 3 Metre | 22013 | 22102 | 22104 |










Recessed Replacement 12 month Warranty


## Nova 17 REC

| Specification | |
|---|---|
| **Installation:** | Recess mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) High Output Opal/Frost colour |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 23mm, (H) 8mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes endcaps.*

*** Special powder coat finishes upon request. Surcharges apply.*

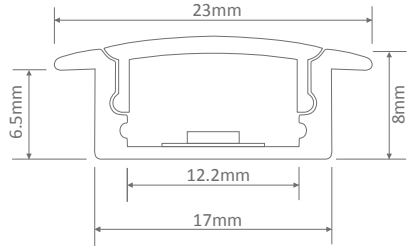


*Simulation* *Aluminium* *White*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

**Does not fit the IP67 version of this strip*

| Profile | Length | Variants | | |
|---|---|---|---|---|
| | | Blk | Alu | Wht |
| NOVA-17-REC | 1 Metre | 22092 | 22048 | 22093 |
| | 3 Metre | 22108 | 22107 | 22109 |

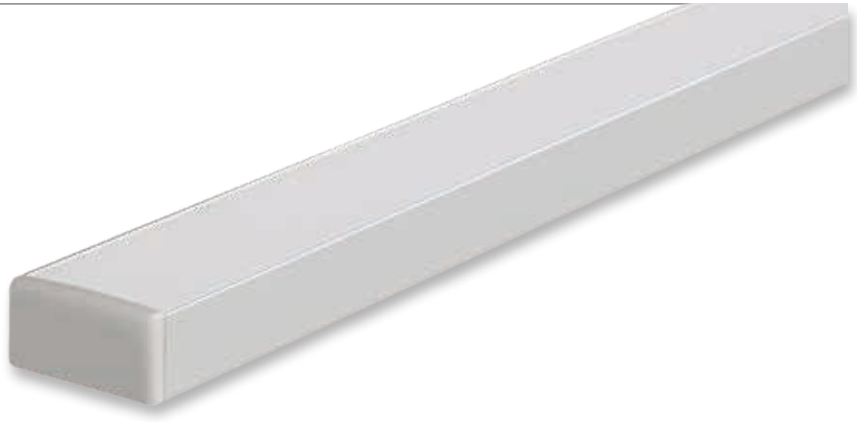


Wall Surface Replacement 12 month Warranty

## Nova 20 SM

| Specification | |
|---|---|
| **Installation:** | Surface or wall mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) high output opal/frost |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 20mm (H) 10mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes Endcaps & mounting clips.*

*** Special powder coat finishes upon request. Surcharges apply.*






*Black* *Aluminium* *White*

### Compatible PLEX-COB LED Strip


| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Length | Variants | | |
|---|---|---|---|---|
| | | Blk | Alu | Wht |
| NOVA-20-SM | 1 Metre | 22938 | 22937 | 22939 |
| | 3 Metre | 22930 | 22929 | 22931 |







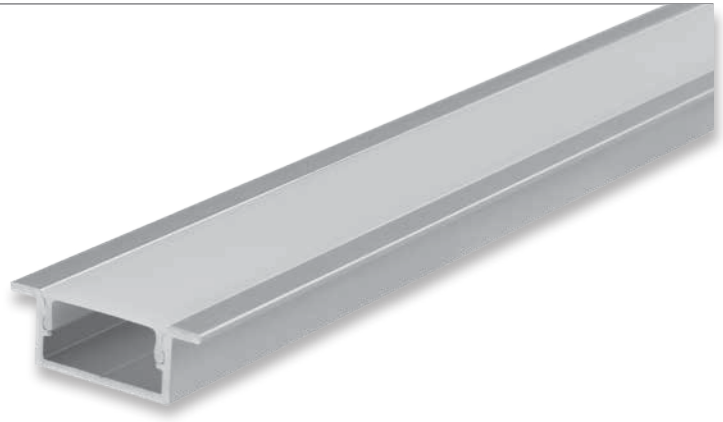


Recessed Replacement 12 month Warranty


## Nova 20 REC

| Specification | |
|---|---|
| **Installation:** | Recess mounted |
| **Material:** | Extruded aluminium 6063 |
| **Finish:** | Natural clear anodised |
| **Diffuser:** | Flat (PMMA) high output opal/frost |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 28mm (H) 10mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes endcaps.*

*** Special powder coat finishes upon request. Surcharges apply.*







*Black* *Aluminium* *White*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Length | Variants | | |
|---|---|---|---|---|
| | | Blk | Alu | Wht |
| NOVA-20-REC | 1 Metre | 22942 | 22941 | 22943 |
| | 3 Metre | 22934 | 22933 | 22935 |

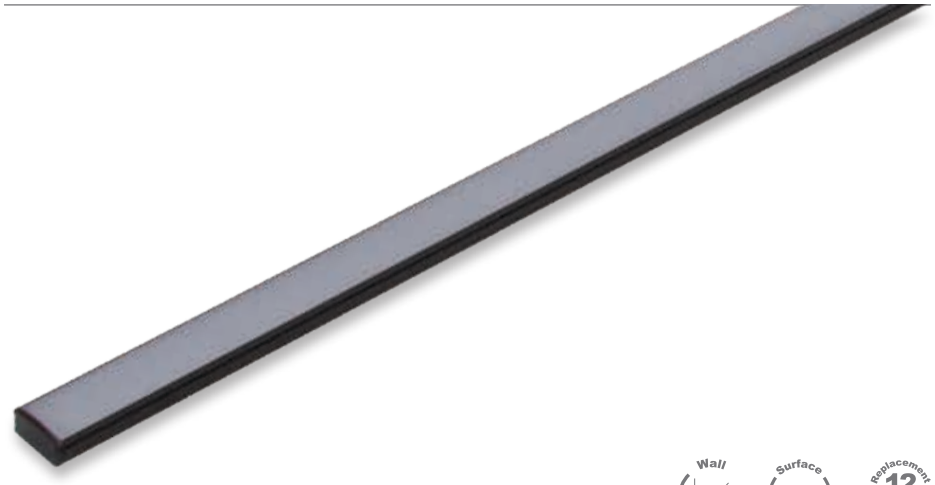


Wall Surface Replacement 12 month Warranty


## Nova 24 SM

| Specification | |
|---|---|
| **Installation:** | Surface or Wall mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) high output opal/frost |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 23.5mm (H) 11mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes Endcaps & mounting clips.*

*** Special powder coat finishes upon request. Surcharges apply.*



*Aluminium* *White*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Length | Variants | | |
|---|---|---|---|---|
| | | Blk | Alu | Wht |
| NOVA-24-SM | 1 Metre | 22435 | 22434 | 22436 |
| | 3 Metre | 22958 | 22957 | 22959 |














Recessed Replacement 12 month Warranty


## Nova 24 REC

| Specification | |
|---|---|
| **Installation:** | Recess mounted |
| **Material:** | Extruded aluminium 6063 |
| **Finish:** | Natural clear anodised |
| **Diffuser:** | Flat (PMMA) high output opal/frost |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 30.5mm (H) 11mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes endcaps.*

*** Special powder coat finishes upon request. Surcharges apply.*

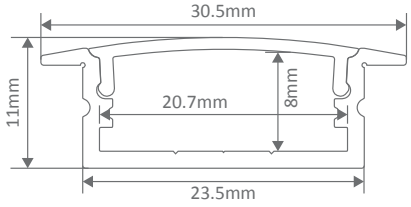





*Aluminium* *White*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Length | Variants | | |
|---|---|---|---|---|
| | | Blk | Alu | Wht |
| NOVA-24-REC | 1 Metre | 22431 | 22430 | 22432 |
| | 3 Metre | 22962 | 22961 | 22963 |

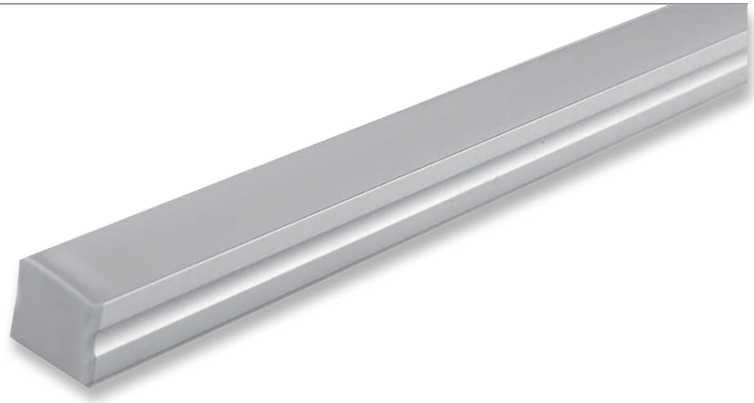


Wall | Surface | Replacement 12 month Warranty


## Omega 17 SM

| Specification | |
|---|---|
| **Installation:** | Surface or Wall mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) high output Frost colour |
| **Length:** | 3000mm continuous* |
| **Size:** | Profile (W) 17mm, (H) 15.2mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 3m. Includes endcaps.*

*** Special powder coat finishes upon request. Surcharges apply.*



*Black* *Aluminium* *White*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |


**Does not fit the IP67 version of this strip*

| Profile | Length | Variants | | |
|---|---|---|---|---|
| | | Blk | Alu | Wht |
| OMEGA-17-SM | 1 Metre | 22127 | 22126 | 22128 |
| | 3 Metre | 22112 | 22111 | 22113 |







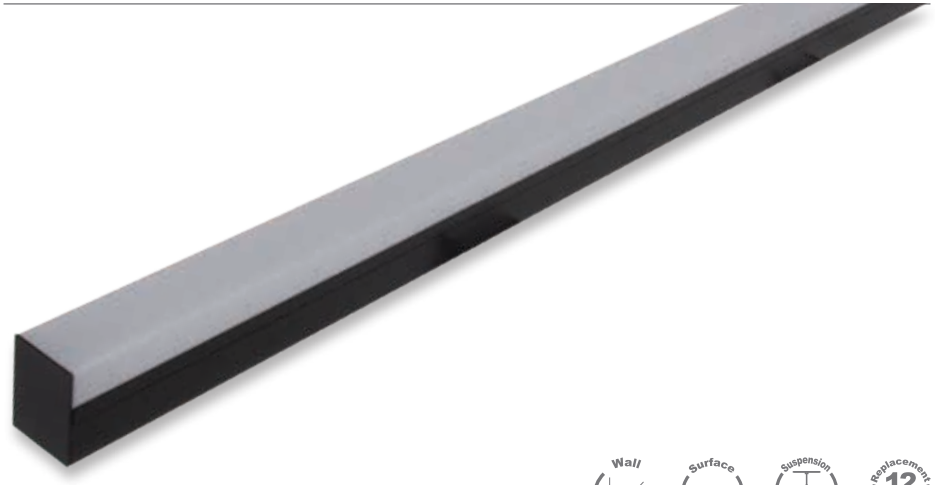

Wall | Surface | Suspension | Replacement 12 month Warranty


## Bloc 42

| Specification | |
|---|---|
| **Installation:** | Surface, wall or suspension mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Wrap around (PMMA) Frost colour |
| **Length:** | 2500mm continuous* |
| **Size:** | Profile (W) 42.5mm, (H) 56mm |
| **Accessories:** | Wire suspensions** |
| **Special:** | Custom powder coated colour upon request*** |
| **Driver installation:** | Remote or integral driver required |

** Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps.*

*** Accessories to be ordered separately.*

**** Special powder coat finishes upon request. Surcharges apply.*







*Aluminium* *White* *Suspension Kit*

### Compatible PLEX-COB LED Strip

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| BLOC-42 | 22294 | 22020 | 22295 | Sold per 1 metre |
| SUSP-KIT-2M | 22041 | | | 2 Metres standard height, sold individually |

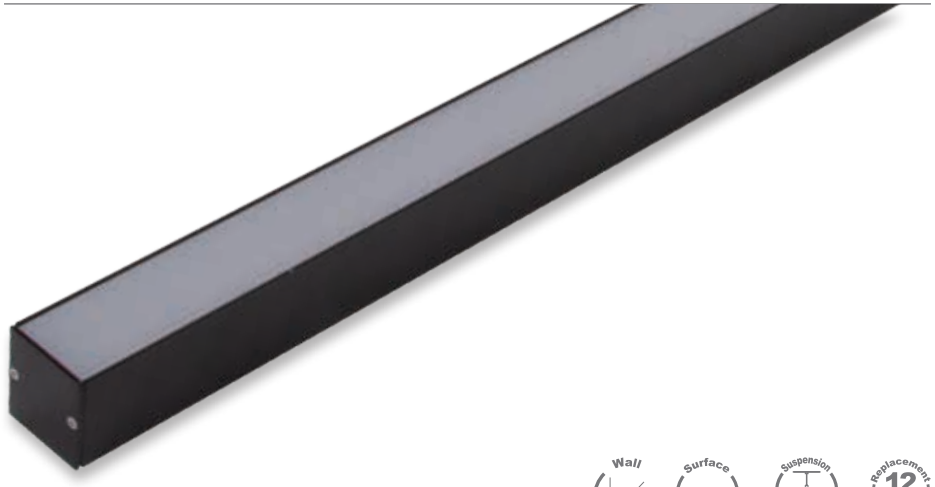

Wall Surface Suspension Replacement 12 month Warranty


## Omega 35 SM


| Specification | |
|---|---|
| **Installation:** | Surface, wall or suspension mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White |
| **Diffuser:** | Flat (PMMA) high output Frost colour |
| **Length:** | 2500mm continuous* |
| **Size: Profile** | Profile (W) 34.8mm, (H) 37.5mm |
| **Accessories:** | Wire suspensions** |
| **Special:** | Custom powder coated colour upon request*** |
| **Driver installation:** | Remote driver required |

** Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps.*


*** Accessories to be ordered separately.*

**** Special powder coat finishes upon request. Surcharges apply.*



*Aluminium*



*White*



*Suspension Kit*

**Compatible PLEX-COB LED Strip**

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| OMEGA-35-SM | 22076 | 22050 | 22077 | Sold per 1 metre |
| SUSP-KIT-2M | 22041 | | | 2 Metres standard height, sold individually |










Recessed Replacement 12 month Warranty


## Omega 35 REC

| Specification | |
|---|---|
| **Installation:** | Recess mounted |
| **Material:** | Extruded Aluminium 6063 |
| **Finish:** | Natural clear anodised, Black or White. |
| **Diffuser:** | Flat (PMMA) high output Frost colour |
| **Length:** | 2500mm continuous* |
| **Size:** | Profile (W) 43.8mm, (H) 34.8mm |
| **Special:** | Custom powder coated colour upon request** |
| **Driver installation:** | Remote driver required |


** Profile sold per metre. Can be cut to suit any length up to 2.5m. Includes endcaps & mounting clips.*

*** Special powder coat finishes upon request. Surcharges apply.*




*Simulation*



*Aluminium*



*White*

**Compatible PLEX-COB LED Strip**

| 5W | 10W | 15W | 20W |
|---|---|---|---|
| • | • | • | • |

| Profile | Variants | | | Details |
|---|---|---|---|---|
| | Blk | Alu | Wht | |
| OMEGA-35-REC | 22074 | 22034 | 22075 | Sold per 1 metre |



PLEX-COB-5-3K

## Plex COB 5

- True Dotless Technology
- Reduced Welded Joints
- Connector and Joiner Accessories available

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 5W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes*** |
| IES files: | Yes |
| Continuous Run: | 10m Max |


* *With the use of Domus drivers*
* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*
** *Indoor Use Only - Suitable for indoor wet areas.*
*** *Fully dimmable with suitable dimmers.*


*5 Metre*


*20 Metre*


*50 Metre*

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | *Per Mt* | *20M* | *50M* | | | |
| PLEX-COB-5 | 24000 | 24014 | 24028 | 3000K | 450Lm/m | Warm White |
| | 24001 | 24015 | 24029 | 4000K | 500lm/m | Neutral White |
| | 24002 | 24016 | 24030 | 5000K | 500lm/m | White |

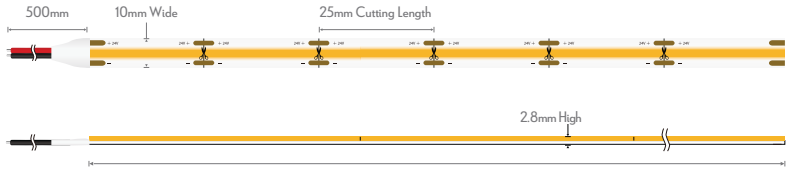








PLEX-COB-10-3K

## Plex COB 10

- True Dotless Technology
- Reduced Welded Joints
- Connector and Joiner Accessories available

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 10W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes*** |
| IES files: | Yes** |
| Continuous Run: | 5m Max |


* *With the use of Domus drivers*
* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*
** *Indoor Use Only - Suitable for indoor wet areas.*
*** *Fully dimmable with suitable dimmers.*


*5 Metre*


*20 Metre*


*50 Metre*

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | *Per Mt* | *20M* | *50M* | | | |
| PLEX-COB-10 | 24003 | 24017 | 24031 | 3000K | 900lm/m | Warm White |
| | 24004 | 24018 | 24032 | 4000K | 900lm/m | Neutral White |
| | 24005 | 24019 | 24033 | 5000K | 1000lm/m | White |

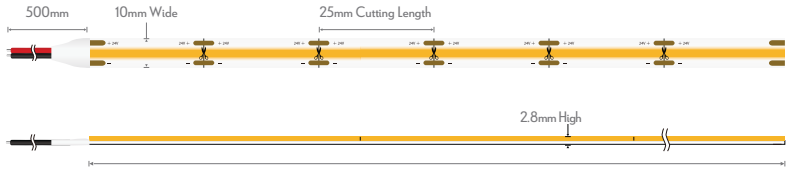



PLEX-COB-15-3K



# Plex COB 15

- True Dotless Technology
- Reduced Welded Joints
- Connector and Joiner Accessories available

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 15W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes*** |
| IES files: | Yes** |
| Continuous Run: | 5 m Max |

* *With the use of Domus drivers*
* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*
** *Indoor Use Only - Suitable for indoor wet areas.*
*** *Fully dimmable with suitable dimmers.*



*5 Metre*




*20 Metre*



*50 Metre*

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | *Per Mt* | *20M* | *50M* | | | |
| PLEX-COB-15 | 24006 | 24020 | 24034 | 3000K | 1350Lm/m | Warm White |
| | 24007 | 24021 | 24035 | 4000K | 1500lm/m | Neutral White |
| | 24008 | 24022 | 24036 | 5000K | 1500lm/m | White |

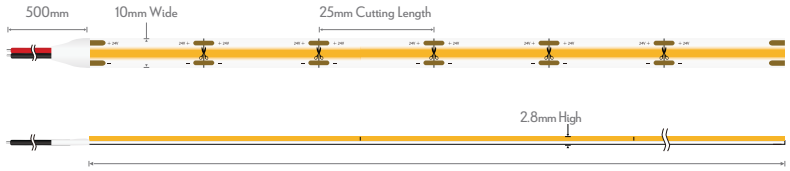








PLEX-COB-20-3K



# Plex COB 20

- True Dotless Technology
- Reduced Welded Joints
- Connector and Joiner Accessories available

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 20W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes*** |
| IES files: | Yes** |
| Continuous Run: | 3m Max |

* *With the use of Domus drivers*
* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*
** *Indoor Use Only - Suitable for indoor wet areas.*
*** *Fully dimmable with suitable dimmers.*



*5 Metre*




*20 Metre*



*50 Metre*

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | *Per Mt* | *20M* | *50M* | | | |
| PLEX-COB-20 | 24009 | 24023 | 24037 | 3000K | 1800lm/m | Warm White |
| | 24010 | 24024 | 24038 | 4000K | 2000lm/m | Neutral White |
| | 24011 | 24025 | 24039 | 5000K | 2000lm/m | White |

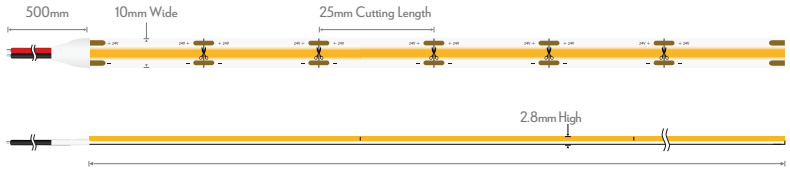




STRIP-COB-KIT-3000K



# Strip COB Kit


IP Rating 44 | Replacement 3yr Warranty | VDC 24

- True Dotless Technology
- Reduced Welded Joints

| Specification: | |
|---|---|
| Colours: | 2 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K & 4000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 608 |
| Wattage Per Metre: | 6W |
| Input Voltage: | 24V DC |
| Beam angle: | 120° |
| IP Rating: | IP44 |
| Dimmable: | No |




| Item No. | Variants | | CCT | Lumen Output | |
|---|---|---|---|---|---|
| | 2M | 5M | | 3000K | 4000K |
| STRIP-COB-KIT | 23900 | 23901 | 3000K-4000K | 610lm | 715lm |











# Plex COB 5 IP67

Waterproof · Dimmable · IP Rating 67 · Replacement Warranty 3+2 yr * · VDC 24

- True Dotless Technology
- Reduced Welded Joints

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 5W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 10m Max |

* *With the use of Domus drivers*

* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*

** *Fully dimmable with suitable dimmers.*



*5 Metre*




*20 Metre*



*50 Metre*

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | *Per Mt* | *20M* | *50M* | | | |
| PLEX-COB-5-IP67 | 24042 | 24056 | 24070 | 3000K | 380Lm/m | Warm White |
| | 24043 | 24057 | 24071 | 4000K | 425lm/m | Neutral White |
| | 24044 | 24058 | 24072 | 5000K | 425lm/m | White |













# Plex COB 10 IP67

Waterproof · Dimmable · IP Rating 67 · Replacement Warranty 3+2 yr * · VDC 24

- True Dotless Technology
- Reduced Welded Joints

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 10W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* *With the use of Domus drivers*

* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*

** *Fully dimmable with suitable dimmers.*



*5 Metre*




*20 Metre*



*50 Metre*

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | *Per Mt* | *20M* | *50M* | | | |
| PLEX-COB-10-IP67 | 24045 | 24059 | 24073 | 3000K | 760lm/m | Warm White |
| | 24046 | 24060 | 24074 | 4000K | 850lm/m | Neutral White |
| | 24047 | 24061 | 24075 | 5000K | 850lm/m | White |





PLEX-COB-5-IP67-3K



# Plex COB 15 IP67

- True Dotless Technology
- Reduced Welded Joints

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 15W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* With the use of Domus drivers

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

** Fully dimmable with suitable dimmers.



5 Metre




20 Metre



50 Metre

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | Per Mt | 20M | 50M | | | |
| PLEX-COB-15-IP67 | 24048 | 24062 | 24076 | 3000K | 1140Lm/m | Warm White |
| | 24049 | 24063 | 24077 | 4000K | 1275lm/m | Neutral White |
| | 24050 | 24064 | 24078 | 5000K | 1275lm/m | White |










PLEX-COB-10-IP67-3K



# Plex COB 20 IP67

- True Dotless Technology
- Reduced Welded Joints

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 20W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67** |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 3m Max |

* With the use of Domus drivers

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

** Fully dimmable with suitable dimmers.



5 Metre




20 Metre



50 Metre

| Item No. | Variants | | | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|---|---|
| | Per Mt | 20M | 50M | | | |
| PLEX-COB-20-IP67 | 24051 | 24065 | 24079 | 3000K | 1520lm/m | Warm White |
| | 24052 | 24066 | 24080 | 4000K | 1700lm/m | Neutral White |
| | 24053 | 24067 | 24081 | 5000K | 1700lm/m | White |








# Plex Vivid Series

## Single Vivid Colour LED Strip


| Specification: | |
|---|---|
| Colours: | Red, Blue, Green & Yellow |
| Light Source: | COB LED |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 15W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54 |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* *With the use of Domus drivers*

* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*

* * *For dimming options please refer to the controller section for further details.*

| Strip | Variants | Colour | Lumen Output |
|---|---|---|---|
| PLEX-VIVID | 24130 | Red | 105lm/m |
| | 24131 | Blue | 270lm/m |
| | 24132 | Green | 1650lm/m |
| | 24133 | Yellow | 1200lm/m |

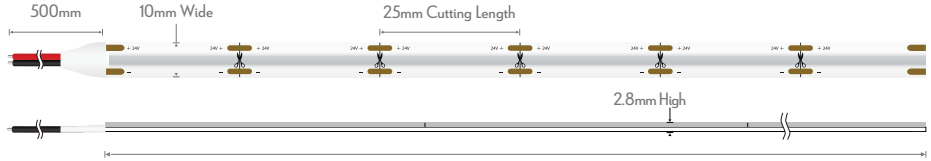











# Plex Vivid IP67 Series

## Single Vivid Colour LED Strip


| Specification: | |
|---|---|
| Colours: | Red, Blue, Green & Yellow |
| Light Source: | COB LED |
| Number of LED Per Metre: | 640 |
| Wattage Per Metre: | 15W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67 |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* *With the use of Domus drivers*

* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*

* * *For dimming options please refer to the controller section for further details.*

| Strip | Variants | Colour | Lumen Output |
|---|---|---|---|
| PLEX-VIVID-IP67 | 24140 | Red | 89lm/m |
| | 24141 | Blue | 230lm/m |
| | 24142 | Green | 1400lm/m |
| | 24143 | Yellow | 1020lm/m |

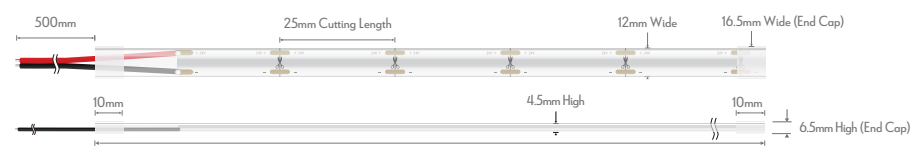







## Plex RGBTW Series

| Specification: | |
|---|---|
| Colours: | RGB + Tuneable White |
| Light Source: | COB LED |
| CRI: | ≥90 |
| Number of LED Per Metre: | 840 |
| Wattage Per Metre: | 21W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54 |
| Cutting Increments/Sections: | 35.7mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

* * For dimming options please refer to the controller section for further details.

| Strip | Variants | CCT | Lumen Output | | | |
|---|---|---|---|---|---|---|
| | | | Red | Green | Blue | Warm White to White |
| PLEX-RGBTW | 24151 | RGBTW | 130lm | 310lm | 65lm | 335lm - 380lm |

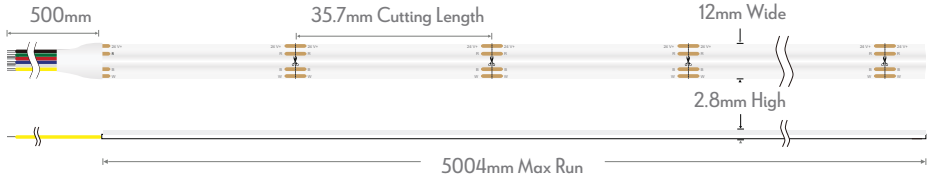












## Plex RGBTW IP67 Series


| Specification: | |
|---|---|
| Colours: | RGB + Tuneable White |
| Light Source: | COB LED |
| CRI: | ≥90 |
| Number of LED Per Metre: | 840 |
| Wattage Per Metre: | 21W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67 |
| Cutting Increments/Sections: | 35.7mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

* * For dimming options please refer to the controller section for further details.

| Strip | Variants | CCT | Lumen Output | | | |
|---|---|---|---|---|---|---|
| | | | Red | Green | Blue | Warm White to White |
| PLEX-RGBTW-IP67 | 24152 | RGBTW | 110lm | 260lm | 55lm | 285lm - 325lm |

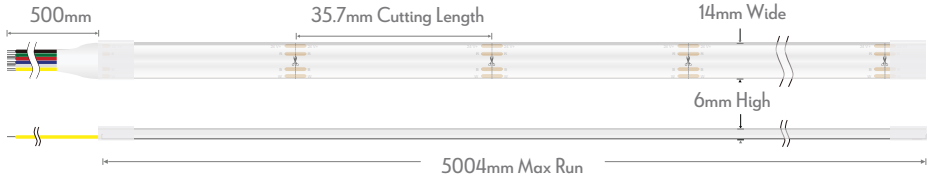

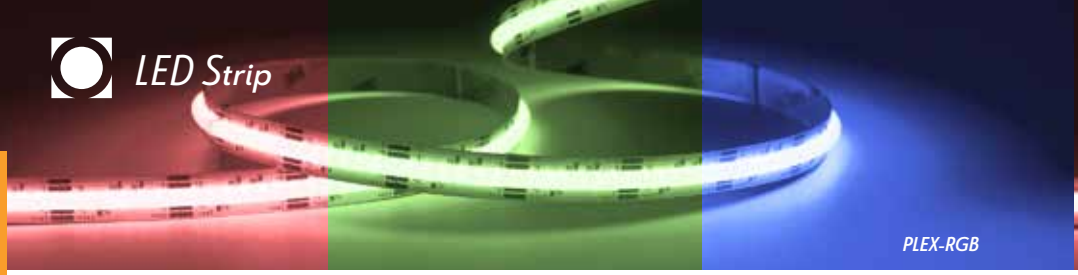



## Plex RGB Series

| Specification: | |
|---|---|
| Colours: | RGB |
| Light Source: | COB LED |
| Number of LED Per Metre: | 840 |
| Wattage Per Metre: | 14W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54 |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

* * For dimming options please refer to the controller section for further details.

| Strip | Variants | CCT | Lumen Output | | |
|---|---|---|---|---|---|
| | | | Red | Green | Blue |
| PLEX-RGB | 24156 | RGB | 120lm | 400lm | 55lm |

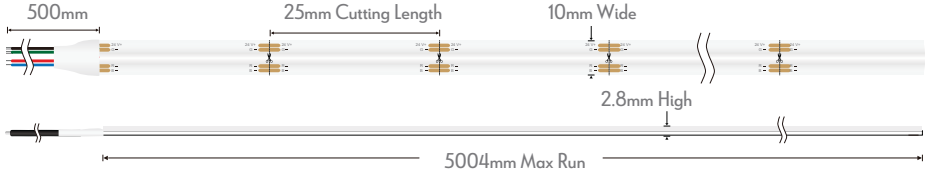










## Plex RGB IP67 Series

| Specification: | |
|---|---|
| Colours: | RGB |
| Light Source: | COB LED |
| Number of LED Per Metre: | 840 |
| Wattage Per Metre: | 14W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67 |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

* * For dimming options please refer to the controller section for further details.

| Strip | Variants | CCT | Lumen Output | | |
|---|---|---|---|---|---|
| | | | Red | Green | Blue |
| PLEX-RGB-IP67 | 24158 | RGB | 102lm | 340lm | 47lm |

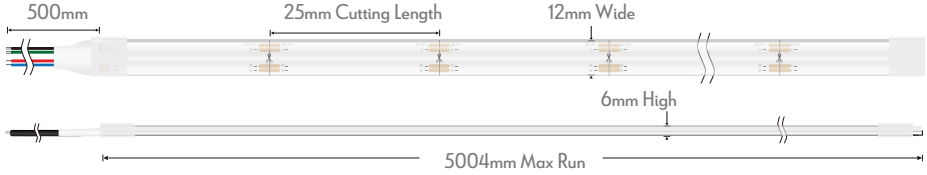





# Plex COB TW Series

| Specification: | |
|---|---|
| Light Source: | COB LED |
| Colour Temperature: | 2700K - 6500K (Tuneable) |
| CRI: | ≥90 |
| Number of LED Per Metre: | 840 |
| Wattage Per Metre: | 20W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54 |
| Cutting Increments/Sections: | 50mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

* * For dimming options please refer to the controller section for further details.

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-COB-TW | 24171 | 2700K - 6500K (Tuneable) | 800-1700lm/m |

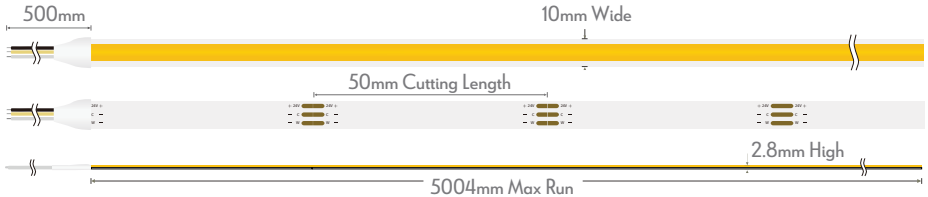








# Plex COB TW IP67 Series


| Specification: | |
|---|---|
| Light Source: | COB LED |
| Colour Temperature: | 2700K - 6500K (Tuneable) |
| CRI: | ≥90 |
| Number of LED Per Metre: | 840 |
| Wattage Per Metre: | 20W |
| Input Voltage: | 24V DC |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP67 |
| Cutting Increments/Sections: | 50mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.

* * For dimming options please refer to the controller section for further details.

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-COB-TW-IP67 | 24173 | 2700K - 6500K (Tuneable) | 680-1450lm/m |

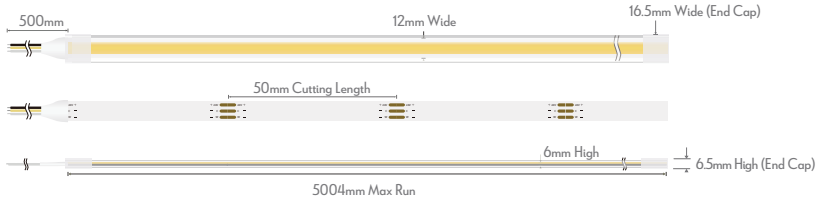

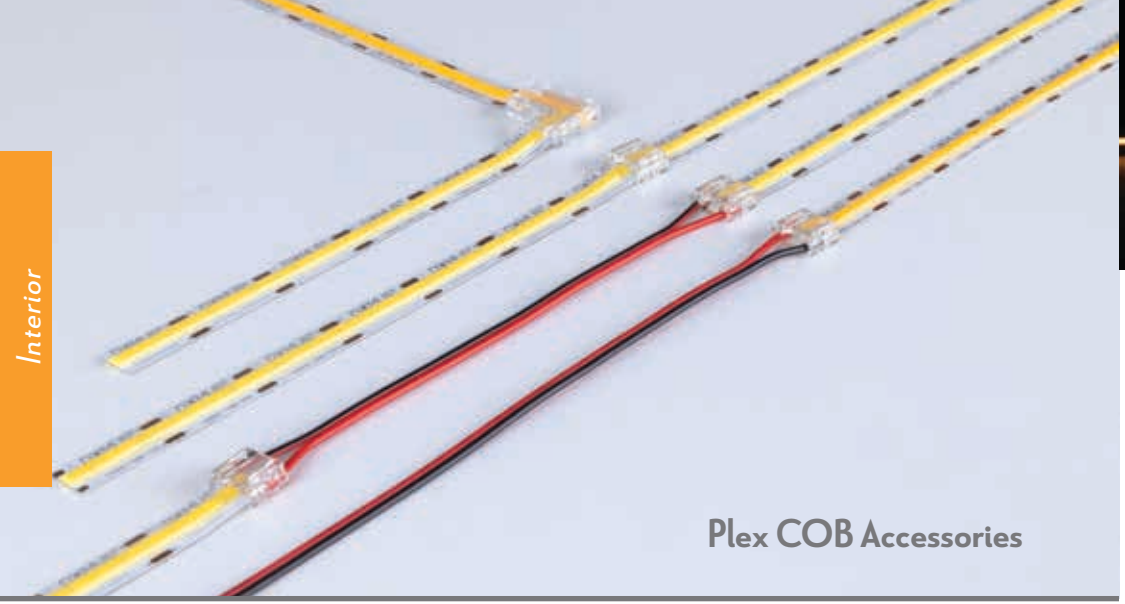

# Plex COB Accessories



*PLEX-COB-FCCON* - **23992**
PLEX-COB 126mm Flexible Strip To Strip Connector (5 Pack)



*PLEX-COB-LCCON* - **23991**
PLEX-COB 500mm Live Cable Connector (5 Pack)




*PLEX-COB-LCON* - **23993**
PLEX-COB L-Shape Strip To Strip Connector (5 Pack)



*PLEX-COB-SCON* - **23990**
PLEX-COB Straight Strip To Strip Connector (5 Pack)

| | *LCCON* | *LCON* | *SCON* | *FCCON* |
|---|---|---|---|---|
| PLEX-COB | 23991 | 23993 | 23990 | 23992 |



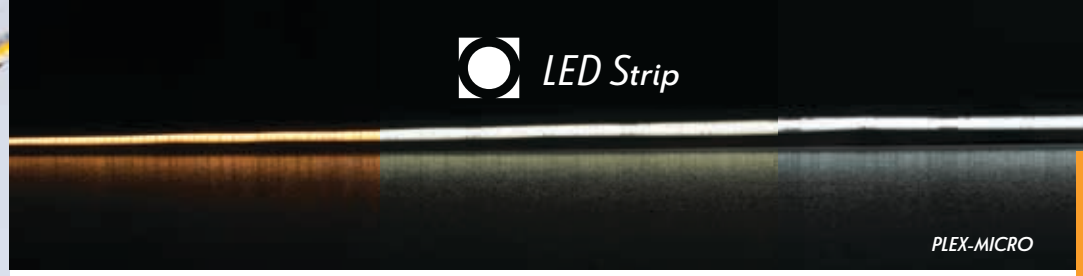




## Plex MICRO Series


| Specification: | |
|---|---|
| Light Source: | COB LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 480 |
| Wattage Per Metre: | 8W |
| Input Voltage: | 24V |
| Beam angle: | 180° |
| Wiring: | Parallel |
| IP Rating: | IP54 |
| Cutting Increments/Sections: | 50mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 5m Max |

* *With the use of Domus drivers*
* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*
** *Fully dimmable with suitable dimmers.*

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-MICRO | 24162 | 3000K | 640-720lm/m |
| | 24163 | 4000K | |
| | 24164 | 5000K | |

### Compatible Profile

| Micro SM | Micro REC |
|---|---|
| • | • |

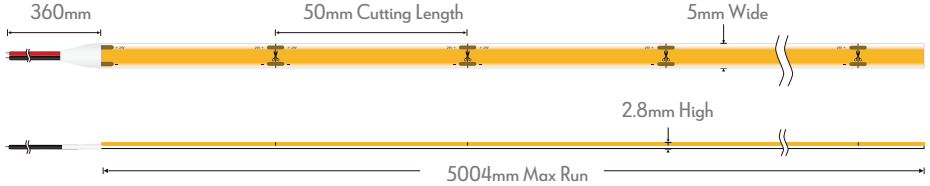



## Plex ULTRA Series
(Designed for long run lengths)

| | |
|---|---|
| **Specification:** | |
| **Light Source:** | COB LED |
| **Colour Temperature:** | 3000K, 4000K & 5000K |
| **CRI:** | ≥90 |
| **Number of LED Per Metre:** | 560 |
| **Wattage Per Metre:** | 10W |
| **Input Voltage:** | 24V DC |
| **Beam angle:** | 180° |
| **Wiring:** | Parallel |
| **IP Rating:** | IP54 |
| **Cutting Increments/Sections:** | 25mm |
| **Requires:** | 24V DC Constant Voltage LED Driver |
| **Dimmable:** | Yes** |
| **IES files:** | Yes |
| **Continuous Run:** | 13m Max |

* *With the use of Domus drivers*
* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*
** *Fully dimmable with suitable dimmers.*

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-ULTRA | 24177 | 3000K | 770-810lm/m |
| | 24178 | 4000K | |
| | 24179 | 5000K | |











## Plex ULTRA IP67 Series
(Designed for long run lengths)

| | |
|---|---|
| **Specification:** | |
| **Light Source:** | COB LED |
| **Colour Temperature:** | 3000K, 4000K & 5000K |
| **CRI:** | ≥90 |
| **Number of LED Per Metre:** | 560 |
| **Wattage Per Metre:** | 10W |
| **Input Voltage:** | 24V DC |
| **Beam angle:** | 180° |
| **Wiring:** | Parallel |
| **IP Rating:** | IP67 |
| **Cutting Increments/Sections:** | 25mm |
| **Requires:** | 24V DC Constant Voltage LED Driver |
| **Dimmable:** | Yes** |
| **IES files:** | Yes |
| **Continuous Run:** | 13m Max |

* *With the use of Domus drivers*
* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*
** *Fully dimmable with suitable dimmers.*

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-ULTRA-IP67 | 24184 | 3000K | 650-688lm/m |
| | 24185 | 4000K | |
| | 24186 | 5000K | |

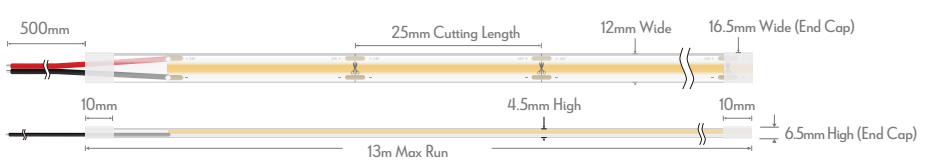




# Plex SMD-5 IP66 Series

**(Designed for extra long run lengths)**


| | |
|---|---|
| **Specification:** | |
| **Light Source:** | SMD LED |
| **Colour Temperature:** | 3000K, 4000K & 5000K |
| **CRI:** | ≥90 |
| **Number of LED Per Metre:** | 70 |
| **Wattage Per Metre:** | 5W |
| **Input Voltage:** | 24V DC |
| **Beam angle:** | 120° |
| **Wiring:** | Parallel |
| **IP Rating:** | IP66 |
| **Cutting Increments/Sections:** | 100mm |
| **Requires:** | 24V DC Constant Voltage LED Driver |
| **Dimmable:** | Yes** |
| **IES files:** | Yes |
| **Continuous Run:** | 40m Max |

* *With the use of Domus drivers*

* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*

** *Fully dimmable with suitable dimmers.*

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-SMD-5-IP66 | 24207 | 3000K | 500-550lm/m |
| | 24208 | 4000K | |
| | 24209 | 5000K | |

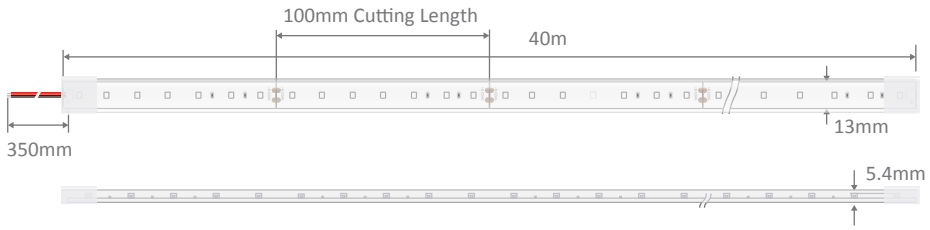









## Plex SMD-9 Series

(Designed for long run lengths)


| Specification: | |
|---|---|
| Light Source: | SMD LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 120 |
| Wattage Per Metre: | 9W |
| Input Voltage: | 24V DC |
| Beam angle: | 120° |
| Wiring: | Parallel |
| IP Rating: | IP54 |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 20m Max |

* *With the use of Domus drivers*

* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*

** *Fully dimmable with suitable dimmers.*

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-SMD-9 | 24192 | 3000K | 765-855lm/m |
| | 24193 | 4000K | |
| | 24194 | 5000K | |

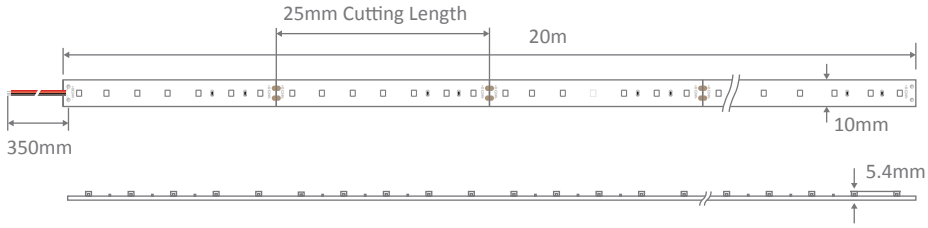











## Plex SMD-9 IP67 Series

(Designed for long run lengths)


| Specification: | |
|---|---|
| Light Source: | SMD LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | ≥90 |
| Number of LED Per Metre: | 120 |
| Wattage Per Metre: | 9W |
| Input Voltage: | 24V DC |
| Beam angle: | 120° |
| Wiring: | Parallel |
| IP Rating: | IP67 |
| Cutting Increments/Sections: | 25mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes** |
| IES files: | Yes |
| Continuous Run: | 20m Max |

* *With the use of Domus drivers*

* *All LED strip must be installed on an aluminium heat sink, failure to do so WILL VOID WARRANTY.*

** *Fully dimmable with suitable dimmers.*

| Strip | Variants | CCT | Lumen Output |
|---|---|---|---|
| PLEX-SMD-9-IP67 | 24199 | 3000K | 650-725lm/m |
| | 24200 | 4000K | |
| | 24201 | 5000K | |

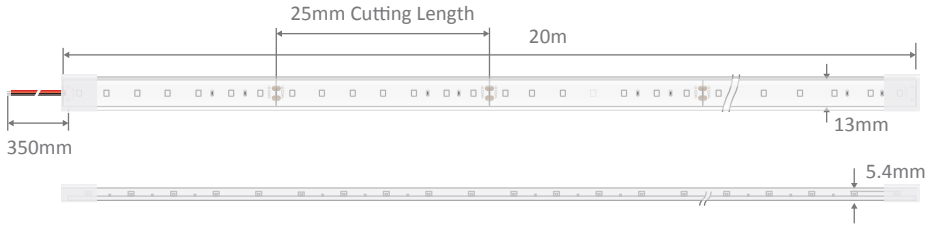






## Pleo 14.4

- LED Neon Flex


| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | 2835 SMD LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | 90 |
| Number of LED Per Metre: | 140 |
| Wattage Per Metre: | 14.4W |
| Input Voltage: | 24V DC |
| Beam angle: | 120° |
| Wiring: | Parallel |
| IP Rating: | IP66 |
| Cutting Increments/Sections: | 50mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes* |
| IES files: | Yes** |
| Continuous Run: | 5m Max |

* *For dimming options please refer to the controller section for further details.*

** *Available upon request.*

| Strip | Variants | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|
| PLEO-14.4 | 20353 | 3000K | 1181lm/m | Warm White |
| | 20354 | 4000K | 1253lm/m | Neutral White |
| | 20355 | 5000K | 1253lm/m | White |

*2700K available upon request*

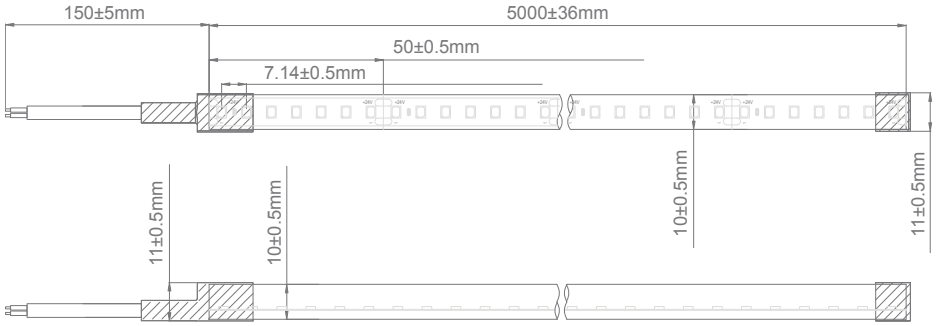











## Pleo 14.4S

- LED Neon Flex
- Side Emitting
- Ideal for curved features

| Specification: | |
|---|---|
| Colours: | 3 colour temperatures |
| Light Source: | 2835 SMD LED |
| Colour Temperature: | 3000K, 4000K & 5000K |
| CRI: | 90 |
| Number of LED Per Metre: | 140 |
| Wattage Per Metre: | 14.4W |
| Input Voltage: | 24V DC |
| Beam angle: | 120° |
| Wiring: | Parallel |
| IP Rating: | IP66 |
| Cutting Increments/Sections: | 50mm |
| Requires: | 24V DC Constant Voltage LED Driver |
| Dimmable: | Yes* |
| IES files: | Yes** |
| Continuous Run: | 5m Max |

* *For dimming options please refer to the controller section for further details.*

** *Available upon request.*

| Strip | Variants | CCT | Lumen Output | Colour Simulation |
|---|---|---|---|---|
| PLEO-14.4-S | 20357 | 3000K | 320lm/m | Warm White |
| | 20358 | 4000K | 346lm/m | Neutral White |
| | 20359 | 5000K | 370lm/m | White |

*2700K available upon request*

# CHAM-BT-RF-5C

The CHAM-BT-RF-5C is a 5-channel controller that can be used with a remote, touch panel wall control, or Bluetooth. Intended for use with constant voltage 12-24V DC lighting products the CHAM-BT-RF-5C offers various ways to control LED strip just by pairing it with a remote control, or a touch wall panel, or by using Bluetooth and controlling with a smart phone with the app. The CHAM-BT-RF-5C also works with GOOGLE and Alexa. Featuring 5 channels allowing control over single colour, RGB or RGBW lighting products.

| Specification: | |
|---|---|
| **Type of controller:** | 5ch 4 in 1 universal RF+ Bluetooth controller |
| **Method of control:** | PWM |
| **Method of dimming:** | PWM (Pulse Width Modulation) |
| **Housing colour:** | Black plastic colour housing |
| **Housing size (mm):** | (L) 145mm x (W) 46.5mm x (H) 16mm |
| **Input voltage (VDC):** | 12-24V DC |
| **Output voltage (VDC):** | 12-24V DC |
| **Output current (A):** | 5x4A |
| **Output wattage (W):** | 12V DC - 48W per channel (x5). 24V DC - 96W per channel (x5). |
| **Expandable signal:** | Yes* |
| **Requires:** | Constant Voltage 12-24V DC LED driver** |

* *Multiple 5CH data repeaters can be used in a single circuit.*

** *Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).*

| Item No. | Variants | Details |
|---|---|---|
| CHAM-BT-RF-5C | 20141 | 5CH Controller |





*CHAM-BT-RF-5C*

## CHAM-REM-3C

The CHAM-REM-3C is an RF + Bluetooth RGBW remote control that is to be used with the CHAM-BT-RF-5C receiver. This remote allows you to dim the LED strip, change the colour and speed up or slow down the speed of the changing colour mode. It also allows you to save specific scenes that you use on a regular basis. The CHAM-REM-3C also has a magnet on the back which allows for ease of use with the mounting bracket.

| Specification: | |
|---|---|
| Type of controller: | RGBW Remote control |
| Protocol: | RF + Bluetooth |
| Dimming range: | 0.1% - 100% |
| Remote colour: | Black |
| Remote size (mm): | (L) 136.3mm x (W) 38.9mm x (D) 10.7mm |
| Transmission frequency: | 2.4GHz |
| Transmission range: | 30m |
| Operation voltage: | 3VDC (CR2025) |

| Item No. | Variants | Details |
|---|---|---|
| CHAM-REM-3C | 20142 | RGBW Remote |



Dimmable · Replacement 3yr Warranty · IP Rating 20 · RGB





## CHAM-REM-1C

The CHAM-REM-1C is an RF + Bluetooth Single colour remote control that is to be used with the CHAM-BT-RF-5C receiver. This remote allows you to dim the LED strip. It also allows you to save specific scenes that you use on a regular basis. The CHAM-REM-1C also has a magnet on the back which allows for ease of use with the mounting bracket.

| Specification: | |
|---|---|
| Type of controller: | Single colour dimming remote control |
| Protocol: | RF + Bluetooth |
| Dimming range: | 0.1% - 100% |
| Remote colour: | Black |
| Remote size (mm): | (L) 150mm x (W) 38.6mm x (D) 12mm |
| Transmission frequency: | 2.4GHz |
| Transmission range: | 30m |
| Operation voltage: | 3VDC (CR2025) |

| Item No. | Variants | Details |
|---|---|---|
| CHAM-REM-1C | 20143 | Single Colour Remote |



Dimmable · Replacement 3yr Warranty · IP Rating 20

## CHAM-TOUCH-3C

The CHAM-TOUCH-3C is an RF + Bluetooth RGBW AC wall control that is to be used with the CHAM-BT-RF-5C receiver. The CHAM-TOUCH-3C wall control allows you to dim the LED strip, change the colour, and speed up or slow down the speed of the changing colour mode. It also allows you to save specific scenes that you use on a regular basis.

| Specification: | |
|---|---|
| Type of controller: | RGBW touch wall control |
| Output signal: | RF + Bluetooth |
| Dimming range: | 0.1% - 100% |
| Colour: | White (Glass) |
| Dimensions (mm): | (L) 120mm x (W) 75mm x (D) 29.1mm |
| Cut out (mm): | (L) 70mm x (W) 44mm x (D) 20mm |
| Transmission frequency: | 2.4GHz |
| Operating temperature: | 0-40°C |
| Power consumption: | < 15mA |
| Operation voltage: | 240V |




| Item No. | Variants | Details |
|---|---|---|
| CHAM-TOUCH-3C | 20144 | 3CH Wall Controller |













## CHAM-TOUCH-1C

The CHAM-TOUCH-1C is an RF + Bluetooth Single colour AC wall control that is to be used with the CHAM-BT-RF-5C receiver. The CHAM-TOUCH-1C wall control allows you to dim the LED strip, It also allows you to save specific scenes that you use on a regular basis.

| Specification: | |
|---|---|
| Type of controller: | Single colour touch wall control |
| Output signal: | RF + Bluetooth |
| Dimming range: | 0.1% - 100% |
| Colour: | White (Glass) |
| Dimensions (mm): | (L) 120mm x (W) 75mm x (D) 29.1mm |
| Cut out (mm): | (L) 70mm x (W) 44mm x (D) 20mm |
| Transmission frequency: | 2.4GHz |
| Operating temperature: | 0-40°C |
| Power consumption: | < 15mA |
| Operation voltage: | 240V |




| Item No. | Variants | Details |
|---|---|---|
| CHAM-TOUCH-1C | 20145 | 1CH Wall Controller |

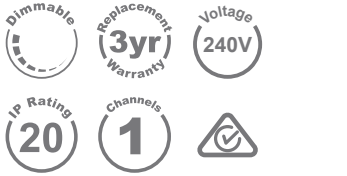

## CHAM-DR-4C

The CHAM-DR-4C is a 4 channel signal strength data repeater. The CHAM-DR-4C offers the ability to expand the signal strength generated by the master controller. In the situation where the load limit is exceeded or more than the limit set by the Master controller the CHAM-DR-4C is able to duplicate the signal without signal loss. This means whether using RGB, RGBW or single colour when colour changing or dimming the selected user colour will always remain the same. Particularly useful where a single master controller is used to control large areas or multiple zones.

| Specification: | |
|---|---|
| **Type of controller:** | 4ch Data Repeater |
| **Method of control:** | PWM* |
| **Method of dimming:** | PWM (Pulse Width Modulation) |
| **Housing colour:** | Black plastic colour housing |
| **Housing size (mm):** | (L) 168mm x (W) 58mm x (H) 28mm |
| **Input voltage (VDC):** | 12-24V DC |
| **Output voltage (VDC):** | 12-24V DC |
| **Output current (A):** | 4x8A |
| **Output wattage (W):** | 12V DC - 96W per channel (x4).<br>24V DC - 192W per channel (x4). |
| **Expandable signal:** | Yes** |
| **Requires:** | Constant Voltage 12-24V DC LED driver*** |

* *Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output.*

** *Multiple 4CH data repeaters can be used in a single circuit.*

*** *Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).*

| Item No. | Variants | Details |
|---|---|---|
| CHAM-DR-4C | 20114 | 4CH Data Repeater |














LED Controllers

Interior

## CHAM-DR-1C

The CHAM-DR-1C is a 1 channel high power data repeater. The CHAM-DR-1C offers the ability to expand the signal strength generated by the master controller for dimming circuits. In situations where the load limit is exceeded or more that the limit set by the Master controller the CHAM-DR-1C is able to duplicate the signal without signal loss.This means whether dimming via RF, 0-10V, DALI or DMX you can be assured that the dimming signal will always be stable thus avoiding the appearance of dim light over larger areas. Particularly useful where a single master controller is used to control large areas or multiple zones.

| Specification: | |
|---|---|
| **Type of controller:** | 1ch High Power Data Repeater |
| **Method of control:** | PWM* |
| **Method of dimming:** | PWM (Pulse Width Modulation) |
| **Housing colour:** | Black metal colour housing |
| **Housing size (mm):** | (L) 150mm x (W) 54mm x (H) 31mm |
| **Input voltage (VDC):** | 12-24V DC |
| **Output voltage (VDC):** | 12-24V DC |
| **Output current (A):** | 1x24A |
| **Output wattage (W):** | 12V DC - 288W (x1)<br>24V DC - 576W (x1) |
| **Expandable signal:** | Yes** |
| **Protection:** | Yes, replaceable external 25A blade fuse*** |
| **Requires:** | Constant Voltage 12-24V DC LED driver **** |

* *Accepts signal generated from a Master controller. The signal output from the Master controller must be a PWM type output.*

** *Multiple 1CH data repeaters can be used in a single circuit.*

*** *Standard replacement blade type fuse. Available from any electronics supplier.*

**** *Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).*

| Item No. | Variants | Details |
|---|---|---|
| CHAM-DR-1C | 20134 | 1CH Power Data Repeater |












Chameleon

# CHAM-DIM-DALI-4C

The CHAM-DIM-DALI-4C is an interface designed to suit DALI dim applications. Intended for use with Constant Voltage 12-24V DC lighting products the CHAM-DIM-DALI-4C offers seamless integration between automation systems. Accepts standard DALI signal generated from any automation system. Featuring 1-4CH of dimming, allowing control over single colour, RGB or RGBW LED lighting products. The CHAM-DIM-DALI-4C make integration a breeze with options for Auto addressing or manual addressing function.

| Specification: | |
|---|---|
| Type of controller: | 1-4ch Dimming Controller (selectable) |
| Method of control: | DALI signal* |
| Method of dimming: | PWM (Pulse Width Modulation) |
| Housing colour: | Black plastic colour housing |
| Housing size (mm): | (L) 169mm x (W) 58mm x (H) 28mm |
| Digital display: | Yes |
| Input voltage (VDC): | 12-24V DC |
| Output voltage (VDC): | 12-24V DC |
| Output current (A): | 4x8A |
| Output wattage (W): | 12V DC - 96W per channel (x4)<br>24V DC - 192W per channel (x4) |
| Expandable signal: | Yes** |
| Requires: | Constant Voltage 12-24V DC LED driver *** |

* *Accepts signal generated from automation systems via a DALI gateway (Type 6 device).*

** *4CH data repeater recommended for loads that exceed the CHAM-DIM-DALI-4C limits. CHAM-DR-4C (**20114**) not included.*

*** *Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).*

| Item No. | Variants | Details |
|---|---|---|
| CHAM-DIM-DALI-4C | 20149 | 4CH DALI Interface |
















# CHAM-DIM-DALI-1C

The CHAM-DIM-DALI-1C is an interface designed to suit DALI dim applications. Intended for use with Constant Voltage 12-24V DC lighting products the CHAM-DIM-DALI-1C offers seamless integration between automation systems. Accepts standard DALI signal generated from any automation system or simple dimming using the "Push Dim" function. Featuring 1CH of dimming, allowing control over single colour LED lighting products. The CHAM-DIM-DALI-1C make integration a breeze with options for Auto addressing or manual addressing function.

| Specification: | |
|---|---|
| Type of controller: | 1ch Dimmer |
| Method of control: | DALI or "Push Dim"* |
| Method of dimming: | PWM (Pulse Width Modulation) |
| Housing colour: | Black plastic colour housing |
| Housing size (mm): | (L) 169mm x (W) 58mm x (H) 28mm |
| Digital display: | Yes |
| Input voltage (VDC): | 12-24V DC |
| Output voltage (VDC): | 12-24V DC |
| Output current (A): | 1 x 8A |
| Output wattage (W): | 12V DC - 96W (x1)<br>24V DC - 192W (x1) |
| Expandable signal: | Yes** |
| Requires: | Constant Voltage 12-24V DC LED driver *** |

* *Accepts signal generated from automation systems via a DALI gateway or via momentary Switch when "Push dim" mode is selected (Type 6 device).*

*** *1CH data repeater recommended for loads that exceed the CHAM-DIM-DALI-1C limits. CHAM-DR-1C (**20134**) not included.*

**** *Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).*

| Item No. | Variants | Details |
|---|---|---|
| CHAM-DIM-DALI-1C | 20132 | DALI 1CH Interface |




CHAM-DIM-DMX





# CHAM-DIM-DMX

The CHAM-DIM-DMX is an interface designed to decode DMX-512 signals. Designed for use with Constant Voltage 12-24V DC lighting products the CHAM-DIM-DMX offers seamless integration between automation systems and/or lighting desk consoles and luminaires. Accepts standard DMX-512 signal generated from any automation system or lighting control console. Featuring up to 4CH of dimming, allowing control over RGB, RGBW or single colour LED lighting products.

| Specification: | |
|---|---|
| Type of interface: | RGBW 4ch Controller |
| Method of control: | DMX-512* |
| Method of dimming: | PWM (Pulse Width Modulation) |
| Housing colour: | Black plastic colour housing |
| Housing size (mm): | (L) 168mm x (W) 58mm x (H) 28mm |
| Digital display: | Yes |
| Input voltage (VDC): | 12-24V DC |
| Output voltage (VDC): | 12-24V DC |
| Output current (A): | 4 x 8A |
| Output wattage (W): | 12V DC - 96W per channel (x4)<br>24V DC - 192W per channel (x4) |
| Multi-channel operation: | Yes** |
| Expandable signal: | Yes*** |
| Requires: | Constant Voltage 12-24V DC LED driver **** |

* *Accepts signal generated from automation systems via a DMX-512 gateway or lighting control console.*
** *3-4CH selectable depending on use. RGB (3CH) or RGBW (4CH).*
*** *4CH data repeater recommended for loads that exceed the CHAM-DIM-DMX limits. CHAM-DR-4C (**20114**) not included.*
**** *Constant Voltage LED driver required (not included) depending on requirements of light source (12V or 24V DC).*

| Item No. | Variants | Details |
|---|---|---|
| CHAM-DIM-DMX | 20129 | 4CH DMX-512 Interface |




## Maxi Series

**Choose profile and choose from the available diffusers.**


Colour Legend

- Heat Sink
- Diffuser
- Upwards Emitting
- Honeycomb

### Maxi 40 Series





*Surface Mounted*





*Recessed*

### Maxi 50 Series





*Surface Mounted*





*Recessed*

### Maxi 75 Series





*Surface Mounted*




*Recessed*

### Maxi Curve Series










LED Profile Systems

Interior




domuslighting.com.au

DOMUS®

## Maxi-40 Recessed Flat Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Low and High Diffuser mounting options available upon request
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-40-REC-ALU



MAXI-40-REC-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-40-RC-FD | 27805 | 27810 | 27800 | 22W | Prismatic | 3000K | 2645lm |
| | 27806 | 27811 | 27801 | | Frosted | | |
| | 27807 | 27812 | 27802 | | Black | | |
| | 27808 | 27813 | 27803 | | Clear | | |
| MAXI-40-RC-FD | 27820 | 27825 | 27815 | 48W | Prismatic | 4000K | 2788lm |
| | 27821 | 27826 | 27816 | | Frosted | | |
| | 27822 | 27827 | 27817 | | Black | | |
| | 27823 | 27828 | 27818 | | Clear | | |










## Maxi-40 Surface Mount Flat Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Low and High Diffuser mounting options available upon request
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.

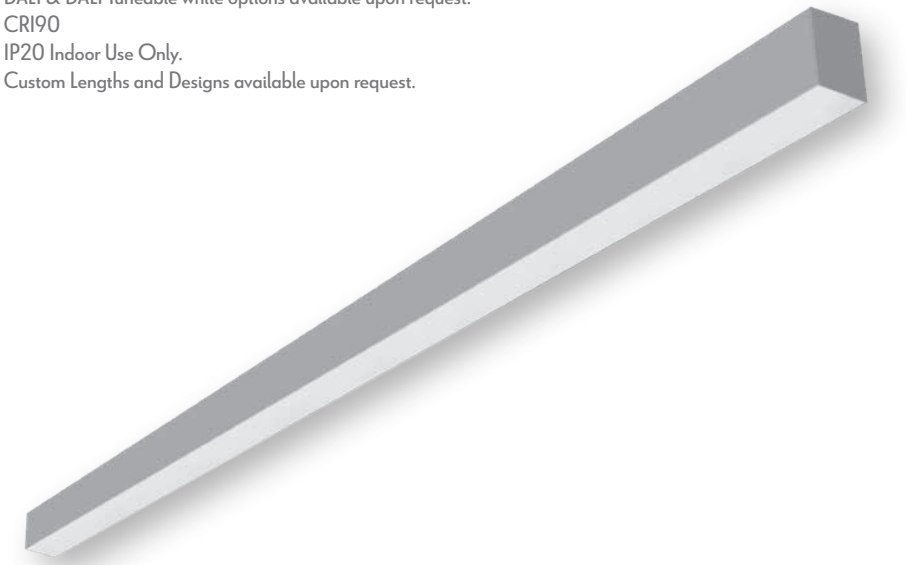




MAXI-40-SM-BLK




MAXI-40-SM-WHT





| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-40-SM-FD | 27535 | 27540 | 27530 | 22W | Prismatic | 3000K | 2645lm |
| | 27536 | 27541 | 27531 | | Frosted | | |
| | 27537 | 27542 | 27532 | | Black | | |
| | 27538 | 27543 | 27533 | | Clear | | |
| MAXI-40-SM-FD | 27550 | 27555 | 27545 | 22W | Prismatic | 4000K | 2788lm |
| | 27551 | 27556 | 27546 | | Frosted | | |
| | 27552 | 27557 | 24547 | | Black | | |
| | 27553 | 27558 | 27548 | | Clear | | |

## Maxi-40 Pendant Flat Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions and 3m clear power cable.
- Low and High Diffuser mounting options available upon request.
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.

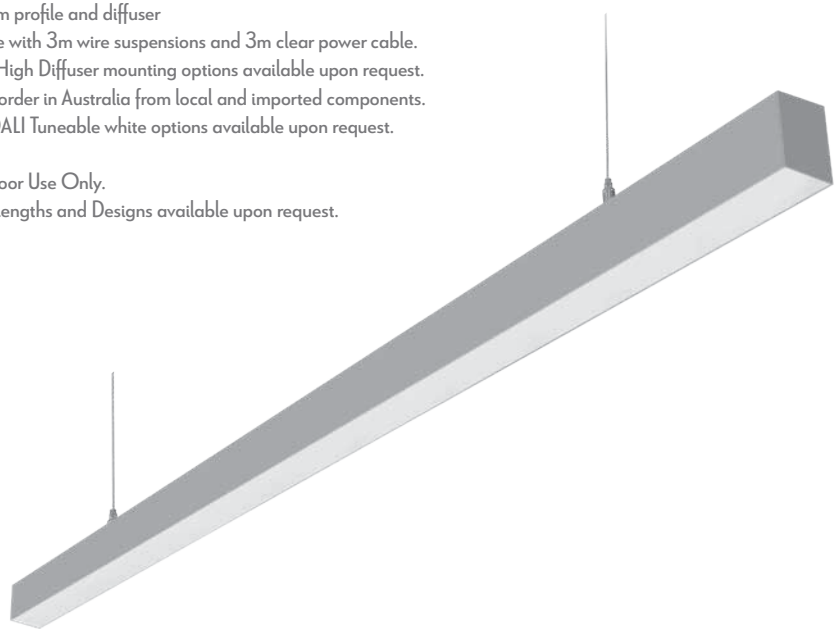




MAXI-40-DN-BLK



MAXI-40-DN-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-40-DN-FD | 27625 | 27630 | 27620 | 22W | Prismatic | 3000K | 2645lm |
| | 27626 | 27631 | 27621 | | Frosted | | |
| | 27627 | 27632 | 27622 | | Black | | |
| | 27628 | 27633 | 27623 | | Clear | | |
| MAXI-40-DN-FD | 27640 | 27645 | 27635 | 22W | Prismatic | 4000K | 2788lm |
| | 27641 | 27646 | 27636 | | Frosted | | |
| | 27642 | 27647 | 27637 | | Black | | |
| | 27643 | 27648 | 27638 | | Clear | | |









## Maxi-40 Down Only Wall Bracket Flat Series


- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Low and High Diffuser mounting options available upon request
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.

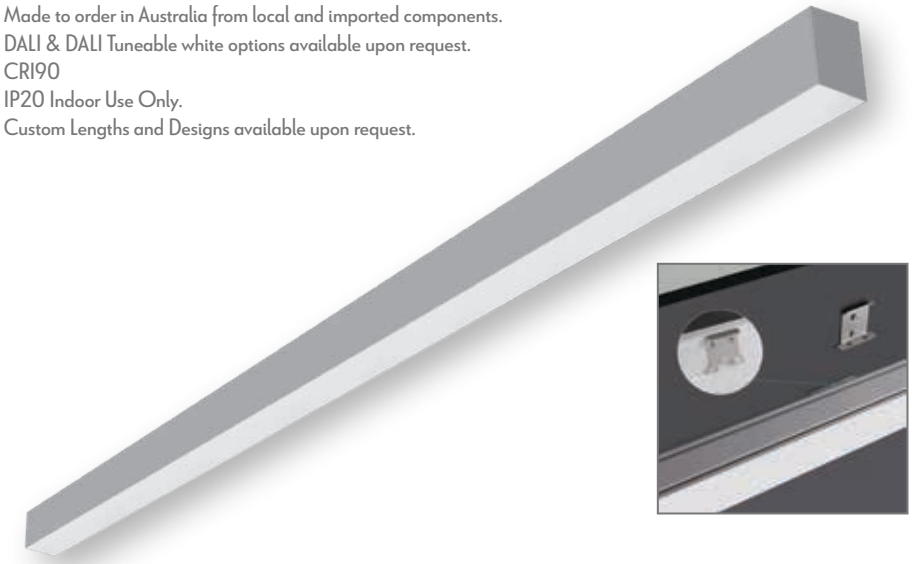






MAXI-40-WB-BLK



MAXI-40-WB-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-40-WB-FD | 27715 | 27720 | 27710 | 22W | Prismatic | 3000K | 2645lm |
| | 27716 | 27721 | 27711 | | Frosted | | |
| | 27717 | 27722 | 27712 | | Black | | |
| | 27718 | 27723 | 27713 | | Clear | | |
| MAXI-40-WB-FD | 27730 | 27645 | 27725 | 22W | Prismatic | 4000K | 2788lm |
| | 27731 | 27646 | 27726 | | Frosted | | |
| | 27732 | 27647 | 27727 | | Black | | |
| | 27733 | 27648 | 27728 | | Clear | | |

## Maxi-50 Recessed Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-50-REC-ALU



MAXI-50-REC-WHT

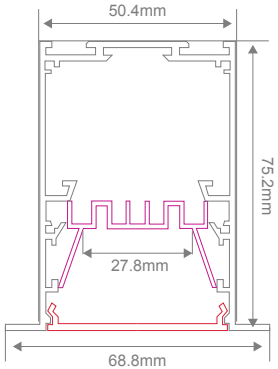


| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-RC | 28437 | 28444 | 28430 | 22W | Prismatic | 3000K | 2645lm |
| | 28438 | 28445 | 28431 | | Frosted | | |
| | 28439 | 28446 | 28432 | | Honeycomb | | |
| | 28440 | 28447 | 28433 | | Opal | | |
| | 28441 | 28448 | 28434 | | Black | | |
| | 28442 | 28449 | 28435 | | Clear | | |
| MAXI-50-RC | 28458 | 28465 | 28451 | 22W | Prismatic | 4000K | 2788lm |
| | 28459 | 28466 | 28452 | | Frosted | | |
| | 28460 | 28467 | 28453 | | Honeycomb | | |
| | 28461 | 28468 | 28454 | | Opal | | |
| | 28462 | 28469 | 28455 | | Black | | |
| | 28463 | 28470 | 28456 | | Clear | | |







## Maxi-50 Surface Mount Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-50-SM-BLK




MAXI-50-SM-WHT





| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-SM | 28227 | 28234 | 28220 | 22W | Prismatic | 3000K | 2645lm |
| | 28228 | 28235 | 28221 | | Frosted | | |
| | 28229 | 28236 | 28222 | | Honeycomb | | |
| | 28230 | 28237 | 28223 | | Opal | | |
| | 28231 | 28238 | 28224 | | Black | | |
| | 28232 | 28239 | 28225 | | Clear | | |
| MAXI-50-SM | 28248 | 28255 | 28241 | 22W | Prismatic | 4000K | 2788lm |
| | 28249 | 28256 | 28242 | | Frosted | | |
| | 28250 | 28257 | 28243 | | Honeycomb | | |
| | 28251 | 28258 | 28244 | | Opal | | |
| | 28252 | 28259 | 28245 | | Black | | |
| | 28253 | 28260 | 28246 | | Clear | | |

## Maxi-50 Down Pendant Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.

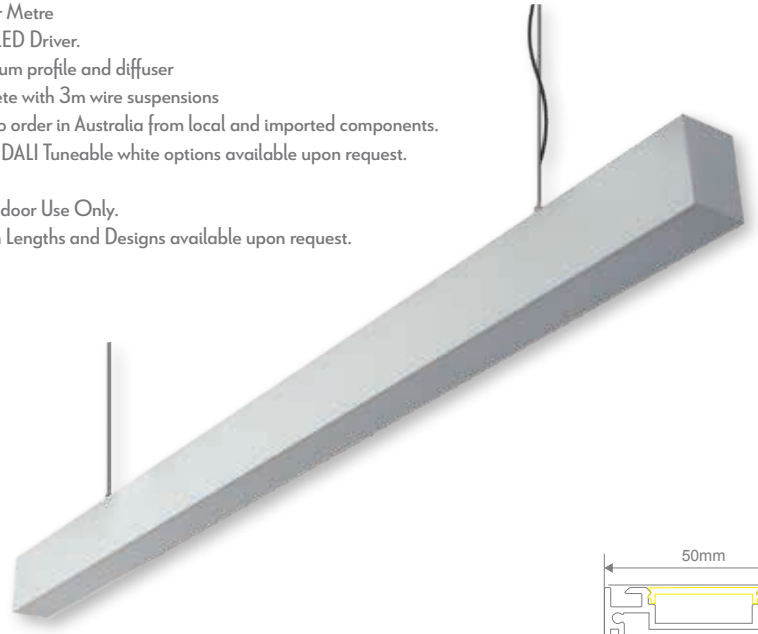




MAXI-50-DN-BLK



MAXI-50-DN-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-DN | 28269 | 28276 | 28262 | 22W | Prismatic | 3000K | 2645lm |
| | 28270 | 28277 | 28263 | | Frosted | | |
| | 28271 | 28278 | 28264 | | Honeycomb | | |
| | 28272 | 28279 | 28265 | | Opal | | |
| | 28273 | 28280 | 28266 | | Black | | |
| | 28274 | 28281 | 28267 | | Clear | | |
| MAXI-50-DN | 28290 | 28297 | 28283 | 22W | Prismatic | 4000K | 2788lm |
| | 28291 | 28298 | 28284 | | Frosted | | |
| | 28292 | 28299 | 28285 | | Honeycomb | | |
| | 28293 | 28300 | 28286 | | Opal | | |
| | 28294 | 28301 | 28287 | | Black | | |
| | 28295 | 28302 | 28288 | | Clear | | |










## Maxi-50 Up/Down Pendant Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions and 3m clear power cable
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-50-UD-BLK




MAXI-50-UD-WHT





| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-UD | 28311 | 28318 | 28304 | 2x22W | Prismatic | 3000K | 2x2645lm |
| | 28312 | 28319 | 28305 | | Frosted | | |
| | 28313 | 28320 | 28306 | | Honeycomb | | |
| | 28314 | 28321 | 28307 | | Opal | | |
| | 28315 | 28322 | 28308 | | Black | | |
| | 28316 | 28323 | 28309 | | Clear | | |
| MAXI-50-UD | 28332 | 28339 | 28325 | 2x22W | Prismatic | 4000K | 2x2788lm |
| | 28333 | 28340 | 28326 | | Frosted | | |
| | 28334 | 28341 | 28327 | | Honeycomb | | |
| | 28335 | 28342 | 28328 | | Opal | | |
| | 28336 | 28343 | 28329 | | Black | | |
| | 28337 | 28344 | 28330 | | Clear | | |

# Maxi-50 Down Only Wall Bracket Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.

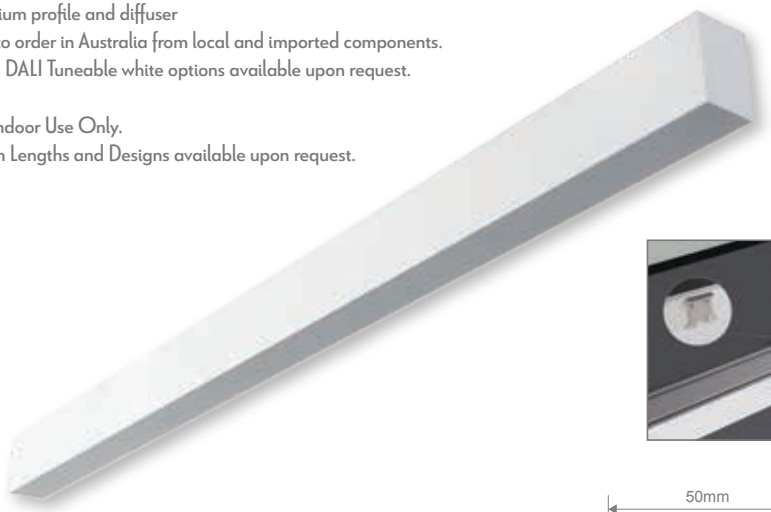








MAXI-50-WB-BLK



MAXI-50-WB-ALU

| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-WB-DN | 28353 | 28360 | 28346 | 22W | Prismatic | 3000K | 2645lm |
| | 28354 | 28361 | 28347 | | Frosted | | |
| | 28355 | 28362 | 28348 | | Honeycomb | | |
| | 28356 | 28363 | 28349 | | Opal | | |
| | 28357 | 28364 | 28350 | | Black | | |
| | 28358 | 28365 | 28351 | | Clear | | |
| MAXI-50-WB-DN | 28374 | 28381 | 28367 | 22W | Prismatic | 4000K | 2788lm |
| | 28375 | 28382 | 28368 | | Frosted | | |
| | 28376 | 28383 | 28369 | | Honeycomb | | |
| | 28377 | 28384 | 28370 | | Opal | | |
| | 28378 | 28385 | 28371 | | Black | | |
| | 28379 | 28386 | 28372 | | Clear | | |









# Maxi-50 Up/Down Wall Bracket Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.

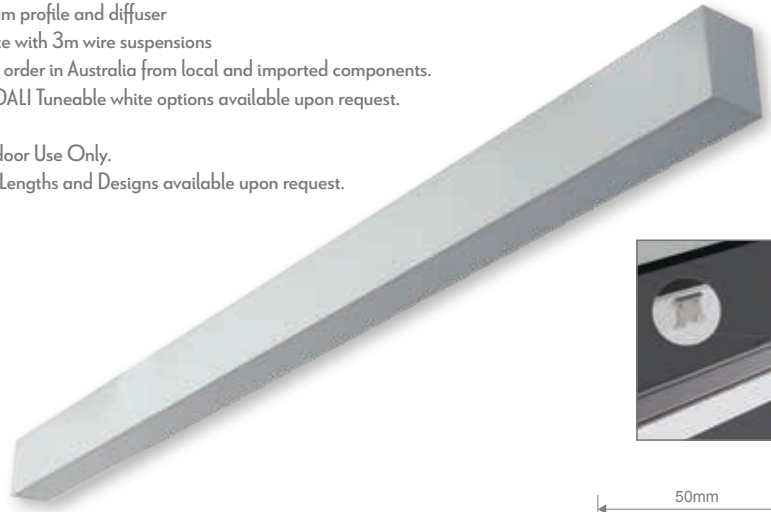








MAXI-50-WB-UD-BLK



MAXI-50-WB-UD-WHT

| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-WB-UD | 28395 | 28402 | 28388 | 2x22W | Prismatic | 3000K | 2x2645lm |
| | 28396 | 28403 | 28389 | | Frosted | | |
| | 28397 | 28404 | 28390 | | Honeycomb | | |
| | 28398 | 28405 | 28391 | | Opal | | |
| | 28399 | 28406 | 28392 | | Black | | |
| | 28400 | 28407 | 28393 | | Clear | | |
| MAXI-50-WB-UD | 28416 | 28423 | 28409 | 2x22W | Prismatic | 4000K | 2x2788lm |
| | 28417 | 28424 | 28410 | | Frosted | | |
| | 28418 | 28425 | 28411 | | Honeycomb | | |
| | 28419 | 28426 | 28412 | | Opal | | |
| | 28420 | 28427 | 28413 | | Black | | |
| | 28421 | 28428 | 28414 | | Clear | | |

## Maxi-Curve Surface Mount Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-CURVE-SM-BLK



MAXI-CURVE-SM-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-CUR-SM | 28731 | 28738 | 28724 | 22W | Prismatic | 3000K | 2645lm |
| | 28732 | 28739 | 28725 | | Frosted | | |
| | 28733 | 28740 | 28726 | | Honeycomb | | |
| | 28734 | 28741 | 28727 | | Opal | | |
| | 28735 | 28742 | 28728 | | Black | | |
| | 28736 | 28743 | 28729 | | Clear | | |
| MAXI-CUR-SM | 28752 | 28759 | 28745 | 22W | Prismatic | 4000K | 2788lm |
| | 28753 | 28760 | 28746 | | Frosted | | |
| | 28754 | 28761 | 28747 | | Honeycomb | | |
| | 28755 | 28762 | 28748 | | Opal | | |
| | 28756 | 28763 | 28749 | | Black | | |
| | 28757 | 28764 | 28750 | | Clear | | |







## Maxi-Curve Pendant Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-CURVE-DN-BLK



MAXI-CURVE-DN-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-CUR-DN | 28773 | 28780 | 28766 | 22W | Prismatic | 3000K | 2645lm |
| | 28774 | 28781 | 28767 | | Frosted | | |
| | 28775 | 28782 | 28768 | | Honeycomb | | |
| | 28776 | 28783 | 28769 | | Opal | | |
| | 28777 | 28784 | 28770 | | Black | | |
| | 28778 | 28785 | 28771 | | Clear | | |
| MAXI-CUR-DN | 28794 | 28801 | 28787 | 22W | Prismatic | 4000K | 2788lm |
| | 28795 | 28802 | 28788 | | Frosted | | |
| | 28796 | 28803 | 28789 | | Honeycomb | | |
| | 28797 | 28804 | 28790 | | Opal | | |
| | 28798 | 28805 | 28791 | | Black | | |
| | 28799 | 28806 | 28792 | | Clear | | |

## Maxi-75 Recessed Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-75-REC-WHT



MAXI-75-REC-ALU

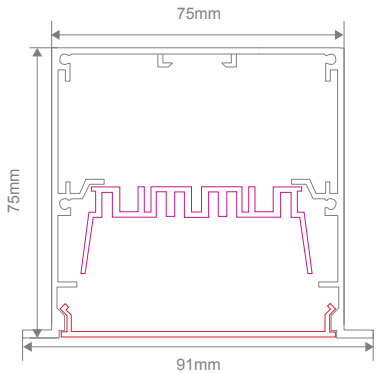


| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-75-REC | 29078 | 29084 | 29072 | 22W | Prismatic | 3000K | 2645lm |
| | 29079 | 29085 | 29073 | | Frosted | | |
| | 29080 | 29086 | 29074 | | Opal | | |
| | 29081 | 29087 | 29075 | | Black | | |
| | 29082 | 29088 | 29076 | | Clear | | |
| MAXI-75-REC | 29096 | 29102 | 29090 | 22W | Prismatic | 4000K | 2788lm |
| | 29097 | 29103 | 29091 | | Frosted | | |
| | 29098 | 29104 | 29092 | | Opal | | |
| | 29099 | 29105 | 29093 | | Black | | |
| | 29100 | 29106 | 29094 | | Clear | | |







## Maxi-75 Surface Mount Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-75-SM-BLK



MAXI-75-SM-ALU




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-75-SM | 28898 | 28904 | 28892 | 22W | Prismatic | 3000K | 2645lm |
| | 28899 | 28905 | 28893 | | Frosted | | |
| | 28900 | 28906 | 28894 | | Opal | | |
| | 28901 | 28907 | 28895 | | Black | | |
| | 28902 | 28908 | 28896 | | Clear | | |
| MAXI-75-SM | 28916 | 28922 | 28910 | 22W | Prismatic | 4000K | 2788lm |
| | 28917 | 28923 | 28911 | | Frosted | | |
| | 28918 | 28924 | 28912 | | Opal | | |
| | 28919 | 28925 | 28913 | | Black | | |
| | 28920 | 28926 | 28914 | | Clear | | |

## Maxi-75 Down Pendant Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-75-DN-BLK



MAXI-75-DN-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-75-DN | 28934 | 28940 | 28928 | 22W | Prismatic | 3000K | 2645lm |
| | 28935 | 28941 | 28929 | | Frosted | | |
| | 28936 | 28942 | 28930 | | Opal | | |
| | 28937 | 28943 | 28931 | | Black | | |
| | 28938 | 28944 | 28932 | | Clear | | |
| MAXI-75-DN | 28952 | 28958 | 28946 | 22W | Prismatic | 4000K | 2788lm |
| | 28953 | 28959 | 28947 | | Frosted | | |
| | 28954 | 28960 | 28948 | | Opal | | |
| | 28955 | 28961 | 28949 | | Black | | |
| | 28956 | 28962 | 28950 | | Clear | | |







## Maxi-75 Up/Down Pendant Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.






MAXI-75-UD-BLK



MAXI-75-UD-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-75-UD | 28970 | 28976 | 28964 | 2x22W | Prismatic | 3000K | 2x2645lm |
| | 28971 | 28977 | 28965 | | Frosted | | |
| | 28972 | 28978 | 28966 | | Opal | | |
| | 28973 | 28979 | 28967 | | Black | | |
| | 28974 | 28980 | 28968 | | Clear | | |
| MAXI-75-UD | 28970 | 28976 | 28964 | 2x22W | Prismatic | 4000K | 2x2788lm |
| | 28971 | 28977 | 28965 | | Frosted | | |
| | 28972 | 28978 | 28966 | | Opal | | |
| | 28973 | 28979 | 28967 | | Black | | |
| | 28974 | 28980 | 28968 | | Clear | | |

# Maxi-75 Down Only Wall Bracket Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.








MAXI-75-WB-BLK



MAXI-75-WB-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-75-WB-DN | 29006 | 29012 | 29000 | 22W | Prismatic | 3000K | 2645lm |
| | 29007 | 29013 | 29001 | | Frosted | | |
| | 29008 | 29014 | 29002 | | Opal | | |
| | 29009 | 29015 | 29003 | | Black | | |
| | 29010 | 29016 | 29004 | | Clear | | |
| MAXI-75-WB-DN | 29024 | 29030 | 29018 | 22W | Prismatic | 4000K | 2788lm |
| | 29025 | 29031 | 29019 | | Frosted | | |
| | 29026 | 29032 | 29020 | | Opal | | |
| | 29027 | 29033 | 29021 | | Black | | |
| | 29028 | 29034 | 29022 | | Clear | | |







# Maxi-75 Up/Down Wall Bracket Series

- Profile includes Driver and Osram LED Boards.
- Sold Per Metre
- Inbuilt LED Driver.
- Aluminium profile and diffuser
- Complete with 3m wire suspensions
- Made to order in Australia from local and imported components.
- DALI & DALI Tuneable white options available upon request.
- CRI90
- IP20 Indoor Use Only.
- Custom Lengths and Designs available upon request.








MAXI-75-WB-UD-ALU



MAXI-75-WB-UD-WHT





| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-75-WB-UD | 29042 | 29048 | 29036 | 2x22W | Prismatic | 3000K | 2x2645lm |
| | 29043 | 29049 | 29037 | | Frosted | | |
| | 29044 | 29050 | 29038 | | Opal | | |
| | 29045 | 29051 | 29039 | | Black | | |
| | 29046 | 29052 | 29040 | | Clear | | |
| MAXI-75-WB-UD | 29060 | 29066 | 29054 | 2x22W | Prismatic | 4000K | 2x2788lm |
| | 29061 | 29067 | 29055 | | Frosted | | |
| | 29062 | 29068 | 29056 | | Opal | | |
| | 29063 | 29069 | 29057 | | Black | | |
| | 29064 | 29070 | 29058 | | Clear | | |


## Mondo Round Series

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (No Earth Required)



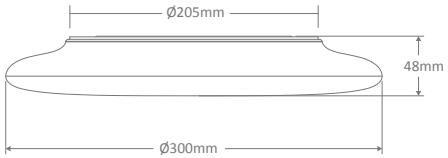


*MONDO-300*

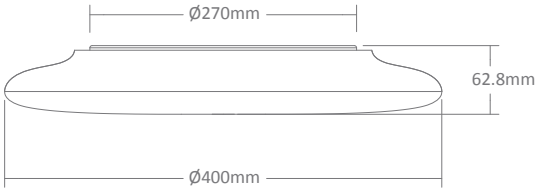


*MONDO-400*

| Item No. | Variants | Wattage | CCT | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|
| | Opal | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| MONDO-300 | 20873 | 20W | TRIO | 44 | 1700lm | 1750lm | 1800lm |
| MONDO-400 | 20879 | 30W | TRIO | 44 | 2400lm | 2450lm | 2500lm |






## Solar Round Series

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (No Earth Required)




*SOLAR-RND-200*







*SOLAR-RND-300*






*SOLAR-RND-400*




| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Wht | Blk | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| SOLAR-200-RND | 20938 | 20939 | 15W | 54 | TRIO | 1350lm | 1400lm | 1450lm |
| SOLAR-300-RND | 20940 | 20941 | 25W | 54 | TRIO | 2250lm | 2300lm | 2350lm |
| SOLAR-400-RND | 20942 | 20943 | 35W | 54 | TRIO | 3150lm | 3200lm | 3250lm |

## Solar Square Series


- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (No Earth Required)




SOLAR-SQR-300



SOLAR-SQR-400




| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| SOLAR-300-SQR | 20946 | 20944 | 25W | 54 | TRIO | 2250lm | 2300lm | 2350lm |
| SOLAR-400-SQR | 20947 | 20945 | 35W | 54 | TRIO | 3000lm | 3050lm | 3100lm |








## Easy Series

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.
- Double Insulated
- Class II (No Earth Required)




EASY-250







EASY-300

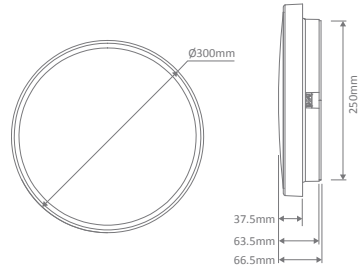




EASY-400

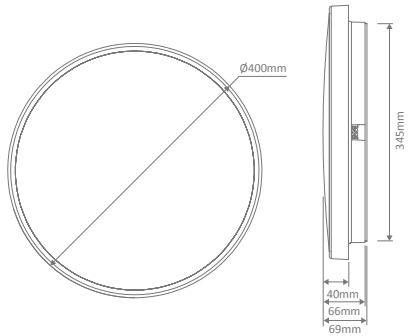



| Item No. | Variants | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|
| | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| EASY-250-RND | 20954 | 10W | 54 | TRIO | 930lm | 965lm | 1000lm |
| EASY-300-RND | 20955 | 18W | 54 | TRIO | 1500lm | 1600lm | 1820lm |
| EASY-400-RND | 20956 | 25W | 54 | TRIO | 2220lm | 2435lm | 2650lm |

## Sunset Series

- Polycarbonate Body and Diffuser.
- Fully dimmable with suitable dimmers.
- Available in Sensor and Emergency Models (SUNSET-300-RND)
- Double Insulated
- CLass II (No Earth Required)



SUNSET-RND

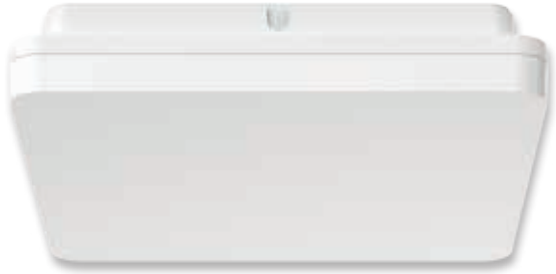


SUNSET-SQR













SUNSET-250-RND





SUNSET-250-SQR





SUNSET-300-RND




SUNSET-300-SQR




SUNSET-400-RND




SUNSET-400-SQR

| Item No. | Variants | Wattage | CCT | IP Rating | Lumen Output | | |
|---|---|---|---|---|---|---|---|
| | Stn Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| SUNSET-250-RND | 20880 | 15W | TRIO | 54 | 1300lm | 1400lm | 1320lm |
| SUNSET-300-RND | 20881 | 25W | TRIO | 54 | 2160lm | 2410lm | 2200lm |
| SUNSET-400-RND | 20882 | 35W | TRIO | 54 | 3020lm | 3420lm | 3240lm |
| SUNSET-250-SQR | 20886 | 15W | TRIO | 54 | 1430lm | 1520lm | 1460lm |
| SUNSET-300-SQR | 20887 | 25W | TRIO | 54 | 2380lm | 2620lm | 2490lm |
| SUNSET-400-SQR | 20888 | 35W | TRIO | 54 | 3300lm | 3570lm | 3380lm |

## Panel Backlit Series

- White trim frame.
- DALI option now available, production lead times apply.
- CRI 80








PANEL-BLT-606

LED Panel

Interior

## Available Sizes

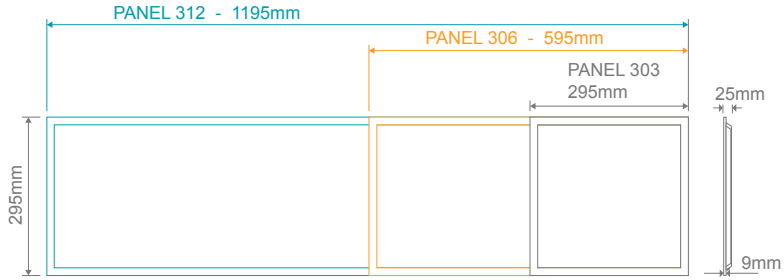

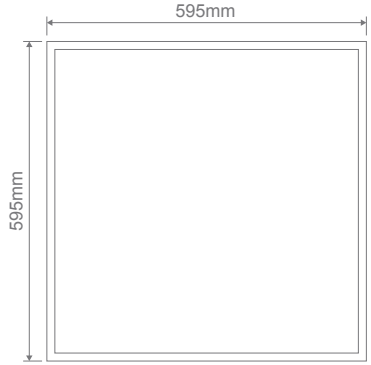
| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Standard | DALI | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| PANEL-BLT-303 | 17615 | 21645 | 10W | 20 | TRIO | 900lm | 1050lm | 1000lm |
| PANEL-BLT-306 | 17617 | 21646 | 12W | 20 | TRIO | 1200lm | 1320lm | 1250lm |
| PANEL-BLT-312 | 17619 | 21647 | 30W | 20 | TRIO | 3500lm | 3600lm | 3550lm |
| PANEL-BLT-606 | 17621 | 21648 | 30W | 20 | TRIO | 3500lm | 3600lm | 3550lm |

## LED Panel Recessed Plaster Frames

- Satin White metal frame.
- To suit Plaster ceilings.



TRIM-606

| Item No. | Variants | Frame Dimensions | Cutout |
|---|---|---|---|
| TRIM-303 | 19324 | (L)330x(W)330x(H)41mm | (L)310x(W)310mm |
| TRIM-306 | 19325 | (L)630x(W)330x(H)41mm | (L)610x(W)310mm |
| TRIM-312 | 19326 | (L)1230x(W)330x(H)41mm | (L)1210x(W)310mm |
| TRIM-606 | 19327 | (L)630x(W)630x(H)41mm | (L)610x(W)610mm |

## LED Panel Surface Mount Frames

- Satin White frame.
- To suit surface mounted applications.
- Also require when suspending the panel in conjunction with 4 x suspension kits.



SM-KIT-303-606-BLT


| Item No. | Variants | Frame Dimensions |
|---|---|---|
| SM-KIT-303-BLT | 19340 | (L)300x(W)355x(H)66mm |
| SM-KIT-306-BLT | 19341 | (L)600x(W)355x(H)66mm |
| SM-KIT-312-BLT | 19342 | (L)1200x(W)355x(H)66mm |
| SM-KIT-606-BLT | 19343 | (L)600x(W)655x(H)66mm |







## LED Panel Surface Mount Frames Installation Guide

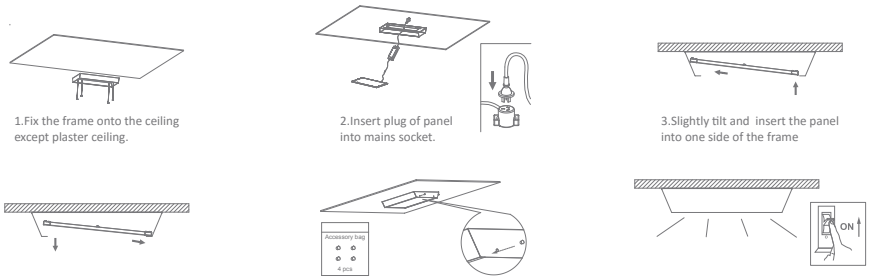


## LED Panel Wire Suspension Kit



| Item No. | Variants | Length |
|---|---|---|
| SUSP-KIT-2M | 22041 | 2M Wire Suspension Kit (each) |
| SUS-KIT-3M | 22044 | 3M Wire Suspension Kit (each) |

*Minimum 4 required per surface mount frame*



*PANEL-BLT-303*
*SM-KIT-303-BLT*

## Moon Track Series


- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.
- CRI 90




MOON-TRK-SPOT



MOON-TRK-TUBE




| Item No. | | Variants Blk | Variants Wht | Wattage | IP | CCT |
|---|---|---|---|---|---|---|
| MOON-TRK | FLD | 22796 | 22797 | 6/9W | 20 | TRIO |
| | OPAL | 22798 | 22799 | | | |
| | SPOT | 22800 | 22801 | | | |
| | TUBE | 22802 | 22803 | | | |

6W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 477lm | 433lm | 498lm | 430lm | 556lm | 504lm | 534lm | 504lm | 561lm | 513lm | 536lm | 515lm |

9W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 651lm | 600lm | 661lm | 593lm | 780lm | 719lm | 756lm | 716lm | 775lm | 729lm | 751lm | 708lm |









MOON-TRK-OPAL




MOON-TRK-FLD




**Up to 45° tilt, 355° Rotation**

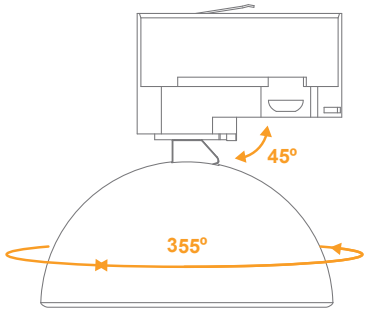


## Moon Track Pendant Series


- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.
- CRI 90

| Item No. | | Variants Blk | Variants Wht | Wattage | IP | CCT |
|---|---|---|---|---|---|---|
| MOON-TRK-PDT | FLD | 22788 | 22789 | 6/9W | 20 | TRIO |
| | OPAL | 22790 | 22791 | | | |
| | SPOT | 22792 | 22793 | | | |
| | TUBE | 22794 | 22795 | | | |

### Up to 45° tilt, 355° Rotation







MOON-TRK-PDT-SPOT






MOON-TRK-PDT-TUBE






6W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 477lm | 433lm | 498lm | 430lm | 556lm | 504lm | 534lm | 504lm | 561lm | 513lm | 536lm | 515lm |

9W - Lumen Output


| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 651lm | 600lm | 661lm | 593lm | 780lm | 719lm | 756lm | 716lm | 775lm | 729lm | 751lm | 708lm |






MOON-TRK-PDT-OPAL






MOON-TRK-PDT-FLD

## Thor Series

- To suit 3-circuit 240V Track.
- Fully dimmable with suitable dimmers.
- Black model comes standard with black baffle and 36 degree lens.
- White model comes standard with white baffle and 36 degree lens.



THOR-15


THOR-25

THOR-35

LED Track Lights

Interior

## Thor Series

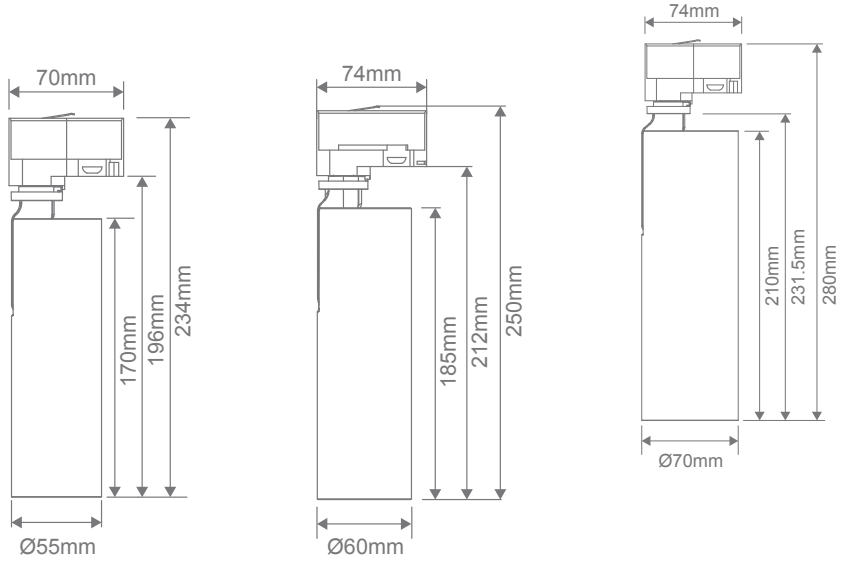


THOR-15 THOR-25 THOR-35


| Item No. | Variants | | | | | | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | 15W | | 25W | | 35W | | | | 15W | 25W | 35W |
| | Blk | Wht | Blk | Wht | Blk | Wht | | | | | |
| THOR | 22250 | 22255 | 22410 | 22414 | 22418 | 22422 | 20 | 3000K | 1068lm | 1751lm | 2950lm |
| | 22251 | 22256 | 22411 | 22415 | 22419 | 22423 | | 4000K | 1147lm | 2011lm | 2990lm |



Coffee & Tea
MATTHEW'S
SINCE 1978
Short Black $3.50
Long Black $3.90
Flat White $4.00
Cappuccino $4.10
Latte $4.20
Mocha $4.50
Macchiato $3.70
Vienna $4.20
Hot Chocolate $4.00

## Trak-3 Series

- Three Circuit 240V Track.
- Available in 1m or 2m lengths.





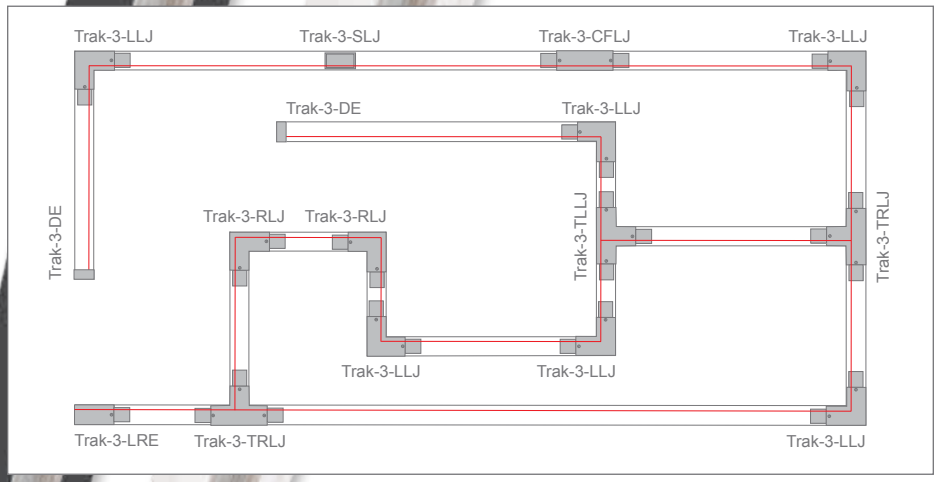
*(LRE) Live Right End*
*(LLE) Live Left End*
*(DE) Dead End*
*(SLJ) Straight Live Joiner*
*(LLLJ) L Shape Left Live Joiner*
*(LRLJ) L Shape Right Live Joiner*
*(SDJ) Straight Dead Joiner*
*(TLLJ) T Shape Left Live Joiner*
*(TRLJ) T Shape Right Live Joiner*
*(ADA) Adaptor*
*(CFLJ) Centre Feed Live Joiner*

| Item No. | Variants | | Voltage | IP Rating | Length |
|---|---|---|---|---|---|
| | Blk | Wht | | | |
| TRAK-3-S1M | 22152 | 22153 | 240V | 20 | 1M |
| TRAK-3-S2M | 22150 | 22151 | 240V | 20 | 2M |














## Trak-3 Accessories

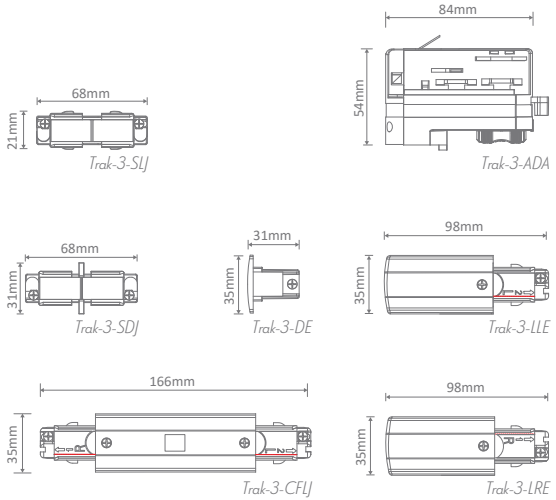


| Item No. | Variants | |
|---|---|---|
| | Black | White |
| TRAK-3-SLJ | 22162 | 22163 |
| TRAK-3-SDJ | 22170 | 22171 |
| TRAK-3-DE | 22160 | 22161 |
| TRAK-ADA | 22186 | 22187 |
| TRAK-3-LLE | 22158 | 22159 |
| TRAK-3-CFLJ | 22188 | 22189 |
| TRAK-3-LRE | 22156 | 22157 |

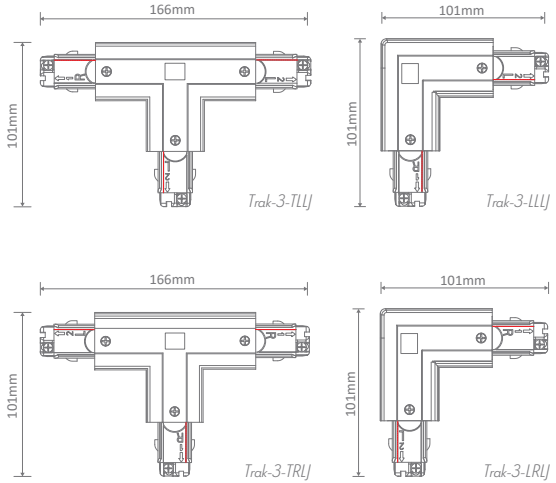



| Item No. | Variants | |
|---|---|---|
| | Blk | Wht |
| TRAK-3-TLLJ | 22176 | 22177 |
| TRAK-3-LLLJ | 22164 | 22165 |
| TRAK-3-TRLJ | 22178 | 22179 |
| TRAK-3-LRLJ | 22166 | 22167 |
| TRAK-3-ROD | 22182 | 22183 |
| TRAK-3-SUS | 22184 | 22185 |
| TRAK-3-SUS-3M | 22190 | 22191 |

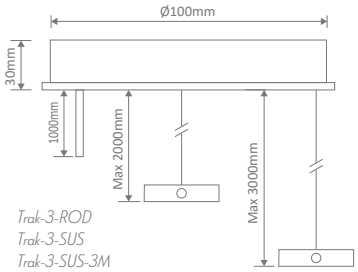


*Trak-3-ROD*
*Trak-3-SUS*
*Trak-3-SUS-3M*

## Allegra Series

- Adjustable length cord suspension.
- Part of a family of matching pendant, table lamp and floor lamp.

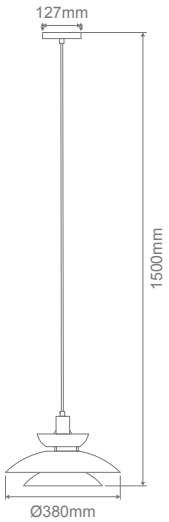




| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Blk | Wht | Schr | | |
| ALLEGRA-PDT | 22701 | 22702 | 22703 | 25W LED Max | 1xE27 Globe (Not Included) |








## Forge Series

- Adjustable length cord suspension.
- Part of a family of matching pendant, table lamp and floor lamp.




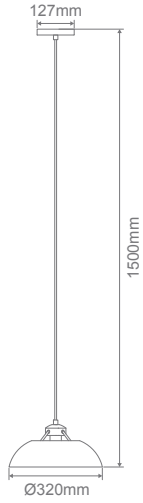


| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| FORGE-PDT | 22711 | 25W LED Max | 1xE27 Globe (Not Included) |

## Strap Series

- Part of a family of matching pendant, table, floor lamp and wall light.
- Adjustable length cord suspension.

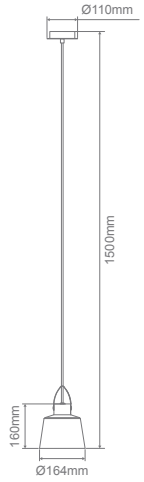





| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Wht | | |
| STRAP-PDT | 22716 | 22717 | 25W LED Max | 1xE27 Globe (Not Included) |


## Carter Series


Voltage 240V

Replacement 12 month Warranty

- Modern thin paper rope shade design.
- Featuring Matt Black metalware, black cable with a choice of Black or Natural colour shade options.

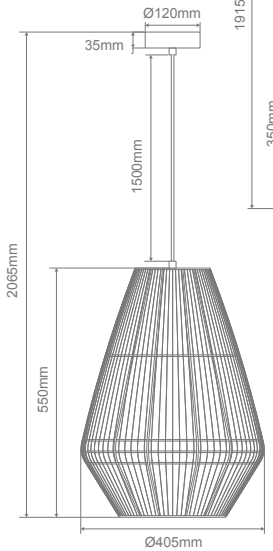

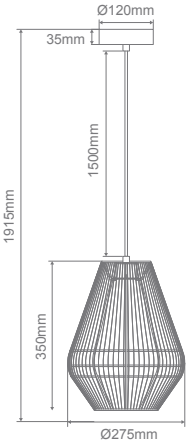


*Small Natural*

*Medium Black*


*Large Natural*

| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | *Blk* | *Ntr* | | |
| CARTER-PDT-SML | 23140 | 23141 | 25W LED Max | 1xE27 Globe (Not Included) |
| CARTER-PDT-MED | 23142 | 23143 | | |
| CARTER-PDT-LRG | 23144 | 23145 | | |



## Spin

- Fully dimmable with suitable dimmers.
- Adjustable length cord suspension.

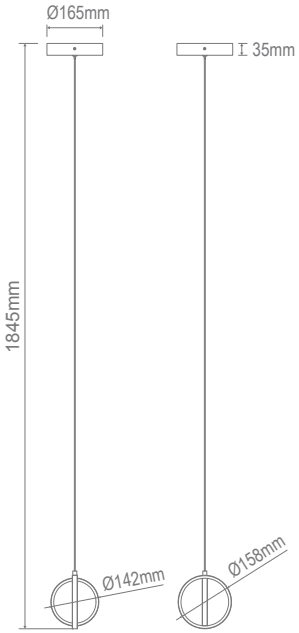





| Item No. | Variants | | | CCT | Wattage | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Sbrs | Wht | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| SPIN-PDT | 22726 | 22727 | 22728 | TRIO | 12W | 1320lm | 1320lm | 1320lm |





## Felix Series

- Adjustable length cord suspension.
- Natural Plywood wood finish.

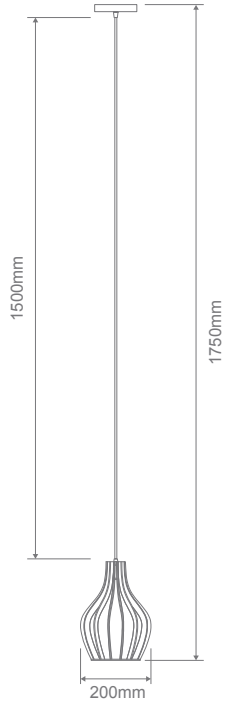





| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| FELIX-PDT | 22765 | 25W LED Max | 1xE27 Globe (Not Included) |

## Hoist Series

- Adjustable length cord suspension.



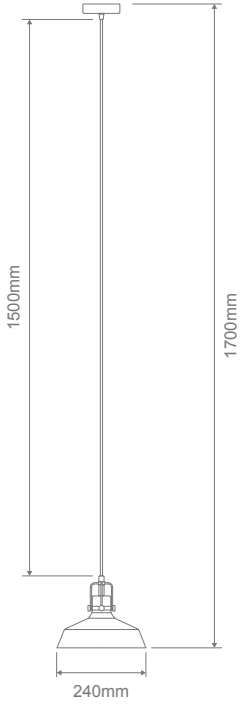


| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Blk/Clear | Sch/Smoke | Abr/Amber | | |
| HOIST-PDT | 22731 | 22732 | 22733 | 25W LED Max | 1xE27 Globe (Not Included) |







## Bubble Series

- Adjustable length cord suspension.






*Available Canopies*

| Item No. | Variants | | | | | | | Wattage | Requires |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | Chr | Schr | Rgld | Sbrs | Abrs | | |
| BUBBLE-200-CLR | 31450 | 31451 | 31452 | 31453 | 31454 | 31455 | 31456 | 25W LED Max | 1xE27 Globe (Not Included) |
| BUBBLE-250-CLR | 31464 | 31465 | 31466 | 31467 | 31468 | 31469 | 31470 | | |
| BUBBLE-300-CLR | 31478 | 31479 | 31480 | 31481 | 31482 | 31483 | 31484 | | |

| Item No. | Variants | | | | | | | Wattage | Requires |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | Chr | Schr | Rgld | Sbrs | Abrs | | |
| BUBBLE-200-OPL | 31457 | 31458 | 31459 | 31460 | 31461 | 31462 | 31463 | 25W LED Max | 1xE27 Globe (Not Included) |
| BUBBLE-250-OPL | 31471 | 31472 | 31473 | 31474 | 31475 | 31476 | 31477 | | |
| BUBBLE-300-OPL | 31485 | 31486 | 31487 | 31488 | 31489 | 31490 | 31491 | | |

## Flaunt Series

- Adjustable length cord suspension.




| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Smoke | Clear | Opal | | |
| FLAUNT-BLK | 22737 | 22738 | 22739 | 25W LED Max | 1xE27 Globe (Not Included) |
| FLAUNT-SBR | 22740 | 22741 | 22742 | | |
| FLAUNT-SCH | 22743 | 22744 | 22745 | | |








## Sands

- Part of a family of matching pendant and table lamp.
- Adjustable length cord suspension.

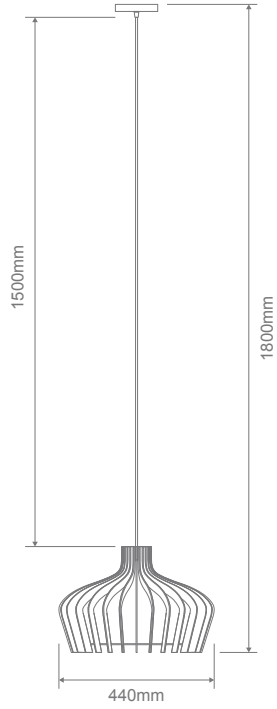




| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| SANDS-PDT | 22749 | 25W LED Max | 1xE27 Globe (Not Included) |

## Sail Series

- Adjustable length cord suspension.




| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Blk/Clear | Sch/Smoke | Abr/Amber | | |
| SAIL-PDT | 22753 | 22754 | 22755 | 25W LED Max | 1xE27 Globe (Not Included) |










## Eva Series

- Glass shade, antique brass glass holder.
- Adjustable length cord suspension.



*Opal*

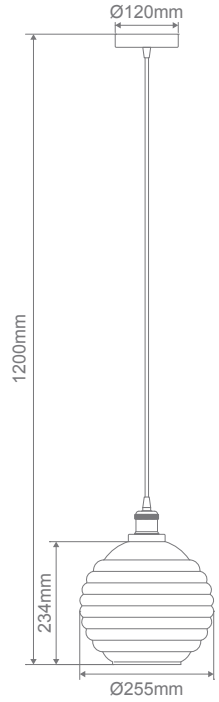



| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| EVA | 31306 | 25W LED Max | 1xE27 Globe (Not Included) |

## Diana

- Glass shade, painted black metalware.
- Adjustable length chain suspension.



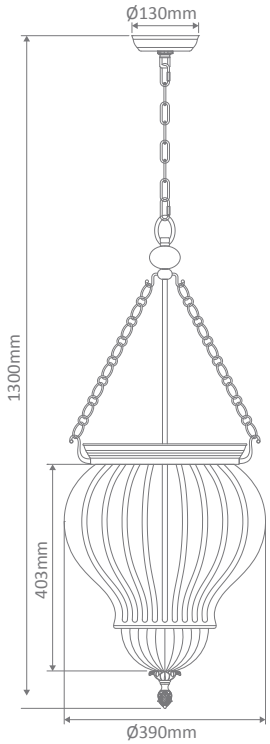


| Item No. | Variant | Wattage | Colour | Requires |
|---|---|---|---|---|
| DIANA | 31323 | 3x25W LED Max | Clear | 3xE14 Globes (Not Included) |








## Ashley

- Wire guard shade.
- Featuring plated Matt black with Antique Brass hightlights.
- Part of a family of matching pendant, table lamp, floor lamp and desk lamp.

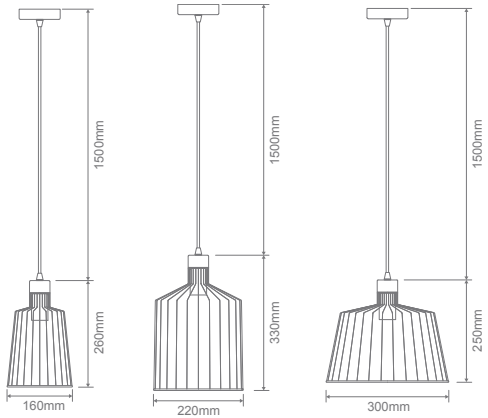



| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Small | Medium | Large | | |
| ASHLEY-PDT | 22508 | 22509 | 22510 | 25W LED Max | 1xE27 Globe (Not Included) |

## Evelyn Series

- Glass shade, antique brass glass holder.
- Adjustable length cord suspension.



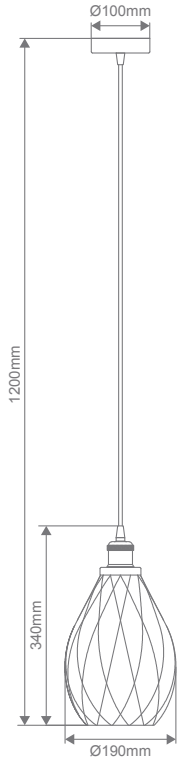


*Amber*

*Clear*

*Grey*

| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Amber | Clear | Grey | | |
| EVELYN | 31350 | 31351 | 31352 | 25W LED Max | 1xE27 Globe (Not Included) |



*EVELYN-GREY*

## Moon Pendant Series


- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.
- CRI 90




MOON-PDT-SPOT



MOON-PDT-TUBE




| Item No. | | Variants Blk | Variants Wht | Wattage | IP | CCT |
|---|---|---|---|---|---|---|
| MOON-PDT | FLD | 22772 | 22773 | 6/9W | 20 | TRIO |
| | OPAL | 22774 | 22775 | | | |
| | SPOT | 22776 | 22777 | | | |
| | TUBE | 22778 | 22779 | | | |

6W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 477lm | 433lm | 498lm | 430lm | 556lm | 504lm | 534lm | 504lm | 561lm | 513lm | 536lm | 515lm |

9W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 651lm | 600lm | 661lm | 593lm | 780lm | 719lm | 756lm | 716lm | 775lm | 729lm | 751lm | 708lm |









MOON-PDT-OPAL



MOON-PDT-FLD








**Up to 45° tilt, 355° Rotation**

## Luna Series

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.



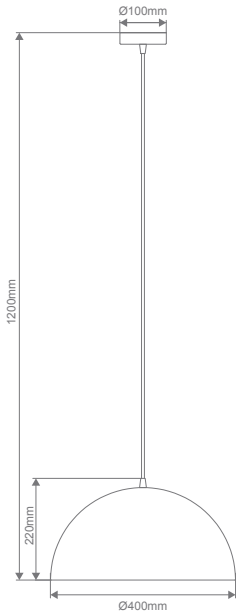



| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Black | White | | |
| LUNA-400 | 31366 | 31367 | 25W LED Max | 1xE27 Globe (Not Included) |




## Zoey Series

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.



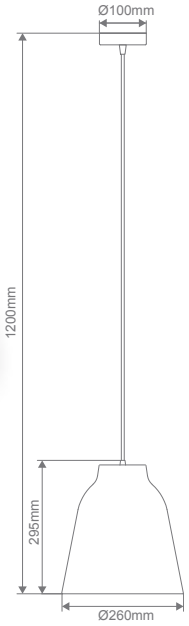


ZOEY-260

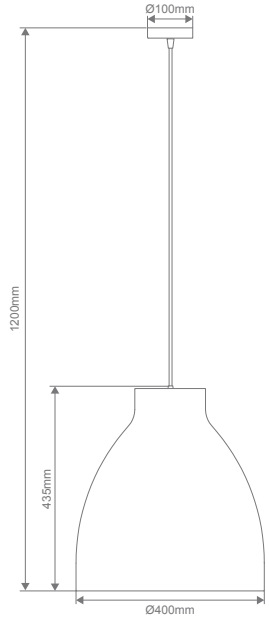


ZOEY-400

| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Black | White | | |
| ZOEY-260 | 31377 | 31378 | 25W LED Max | 1xE27 Globe (Not Included) |
| ZOEY-400 | 31382 | 31383 | 25W LED Max | 1xE27 Globe (Not Included) |








## Ruby Series

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.



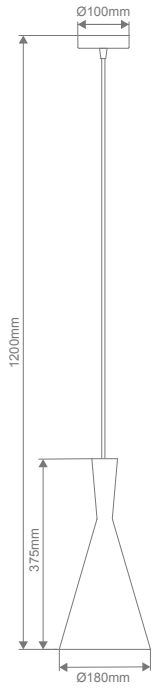



| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Black | White | | |
| RUBY-185 | 31395 | 31396 | 25W LED Max | 1xE27 Globe (Not Included) |

## Jade-220 Series

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.



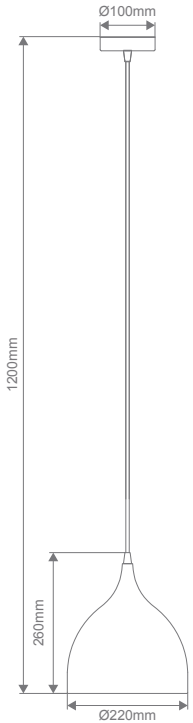



| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Black | White | | |
| JADE-220 | 31415 | 31416 | 25W LED Max | 1xE27 Globe (Not Included) |



# Jade-240 Series

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.
- Matching small and large shade option.

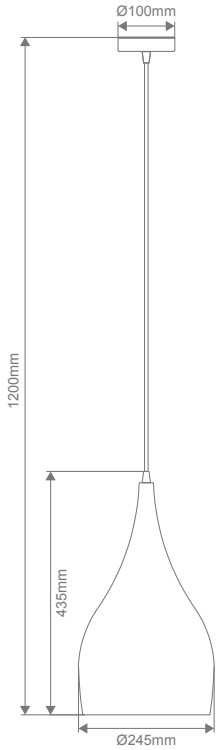




| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Black | White | | |
| JADE-240 | 31420 | 31421 | 25W LED Max | 1xE27 Globe (Not Included) |



# Melody Series

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.







| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Black | White | | |
| MELODY-300 | 31443 | 31444 | 25W LED Max | 1xE27 Globe (Not Included) |




## Nova Series

Voltage 240V

Replacement 12 month Warranty

- Coloured metal shade with painted white interior.
- Adjustable length cord suspension.



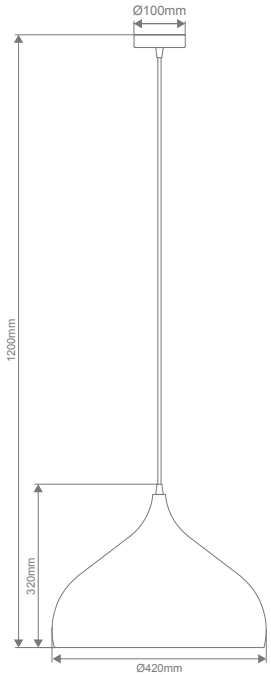


| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Black | White | | |
| NOVA-420 | 31433 | 31434 | 25W LED Max | 1xE27 Globe (Not Included) |



*NOVA-420-BLK*

# LED Linear Pendants

## Max-35 Series

- Fully dimmable with suitable dimmers.
- Aluminium profile and PMMA opal diffuser.
- Adjustable length wire suspension.
- Removable Honeycomb Reflector.











*Black*

| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output *(Standard / Honeycomb)* | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| MAX-35-1.2M | 22648 | 22649 | 30W | 20 | TRIO | 2800lm/1050lm | 3000m/1200lm | 3050lm/1400lm |
| MAX-35-1.7M | 22651 | 22652 | 40W | 20 | TRIO | 3500lm/1500lm | 3700lm/1700lm | 3750lm/1900lm |

## Maxi-40 Flat Series

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- Black and Clear diffuser options available upon request.
- CRI90
- IP20 Indoor Use Only.

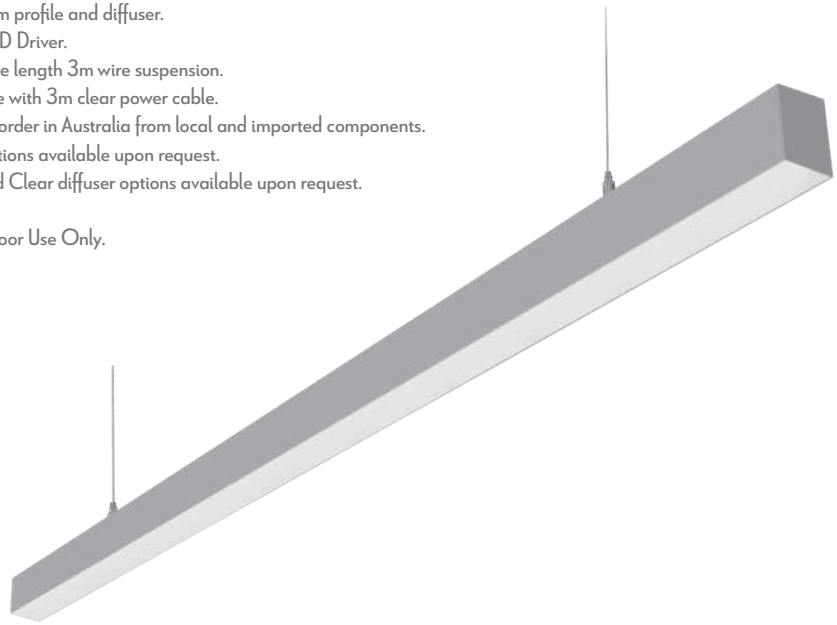




MAXI-40-FD-BLK



MAXI-40-FD-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-40-1.2M-FD | 30135 | 30140 | 30130 | 24W | Prismatic Frosted | 3000K | 2160lm |
| | 30136 | 30141 | 30131 | | | | |
| | 30150 | 30156 | 30145 | | Pristmatic Frosted | 4000K | 2400lm |
| | 30151 | 30157 | 30146 | | | | |
| MAXI-40-1.7M-FD | 30225 | 30230 | 30220 | 34W | Prismatic Frosted | 3000K | 3060lm |
| | 30226 | 30231 | 30221 | | | | |
| | 30240 | 30245 | 30235 | | Pristmatic Frosted | 4000K | 3400lm |
| | 30241 | 30246 | 30236 | | | | |
| MAXI-40-2.4M-FD | 30315 | 30320 | 30310 | 48W | Prismatic Frosted | 3000K | 4320lm |
| | 30316 | 30321 | 30311 | | | | |
| | 30330 | 30335 | 30325 | | Pristmatic Frosted | 4000K | 4800lm |
| | 30331 | 30336 | 30326 | | | | |









## Maxi-40 Low Series

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- Black and Clear diffuser options available upon request.
- CRI90
- IP20 Indoor Use Only.

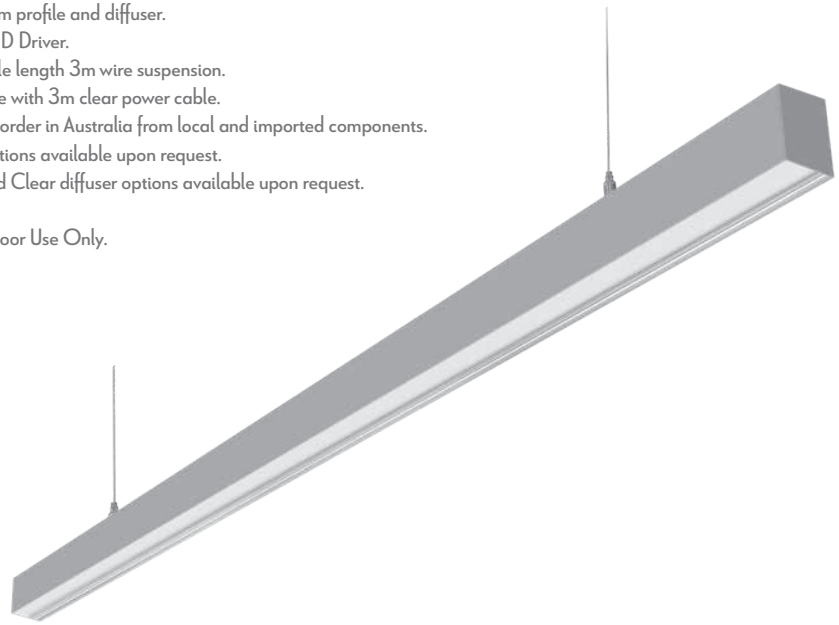




MAXI-40-LD-BLK




MAXI-40-LD-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-40-1.2M-LD | 30105 | 30110 | 30100 | 24W | Prismatic Frosted | 3000K | 2160lm |
| | 30106 | 30111 | 30101 | | | | |
| | 30120 | 30125 | 30115 | | Pristmatic Frosted | 4000K | 2400lm |
| | 30121 | 30126 | 30116 | | | | |
| MAXI-40-1.7M-LD | 30195 | 30200 | 30190 | 34W | Prismatic Frosted | 3000K | 3060lm |
| | 30196 | 30201 | 30191 | | | | |
| | 30210 | 30215 | 30205 | | Pristmatic Frosted | 4000K | 3400lm |
| | 30211 | 30216 | 30206 | | | | |
| MAXI-40-2.4M-LD | 30285 | 30290 | 30280 | 48W | Prismatic Frosted | 3000K | 4320lm |
| | 30286 | 30291 | 30281 | | | | |
| | 30300 | 30305 | 30295 | | Pristmatic Frosted | 4000K | 4800lm |
| | 30301 | 30306 | 30296 | | | | |

## Maxi-40 High Series

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- Black and Clear diffuser options available upon request.
- CRI90
- IP20 Indoor Use Only.

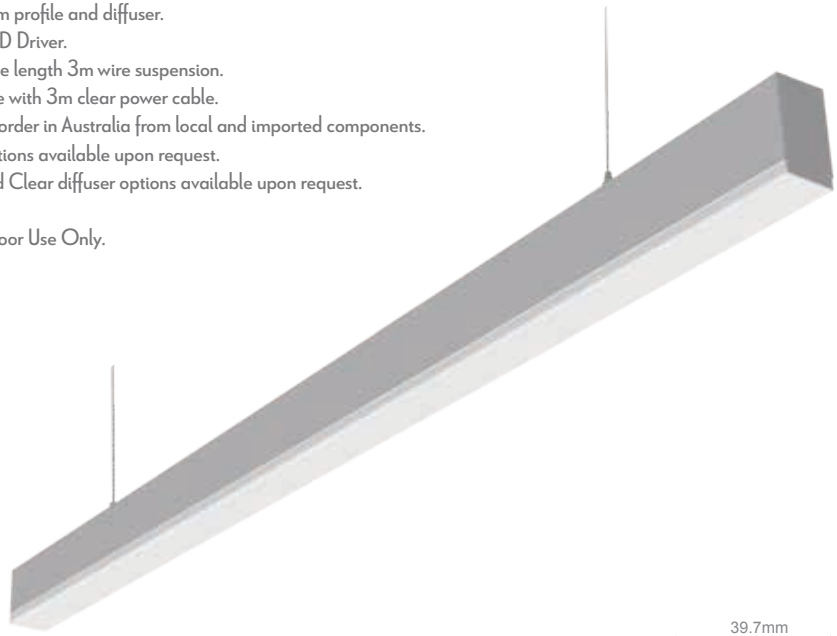




MAXI-40-HD-BLK



MAXI-40-HD-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-40-1.2M-HD | 30165 | 30170 | 30160 | 24W | Prismatic | 3000K | 2160lm |
| | 30166 | 30171 | 30161 | | Frosted | | |
| | 30180 | 30185 | 30175 | | Pristmatic | 4000K | 2400lm |
| | 30181 | 30186 | 30176 | | Frosted | | |
| MAXI-40-1.7M-HD | 30255 | 30260 | 30250 | 34W | Prismatic | 3000K | 3060lm |
| | 30256 | 30261 | 30251 | | Frosted | | |
| | 30270 | 30275 | 30265 | | Pristmatic | 4000K | 3400lm |
| | 30271 | 30276 | 30266 | | Frosted | | |
| MAXI-40-2.4M-HD | 30345 | 30350 | 30340 | 48W | Prismatic | 3000K | 4320lm |
| | 30346 | 30351 | 30341 | | Frosted | | |
| | 30360 | 30365 | 30355 | | Pristmatic | 4000K | 4800lm |
| | 30361 | 30366 | 30356 | | Frosted | | |









## Maxi-50 1.2M Series

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- CRI90
- IP20 Indoor Use Only.

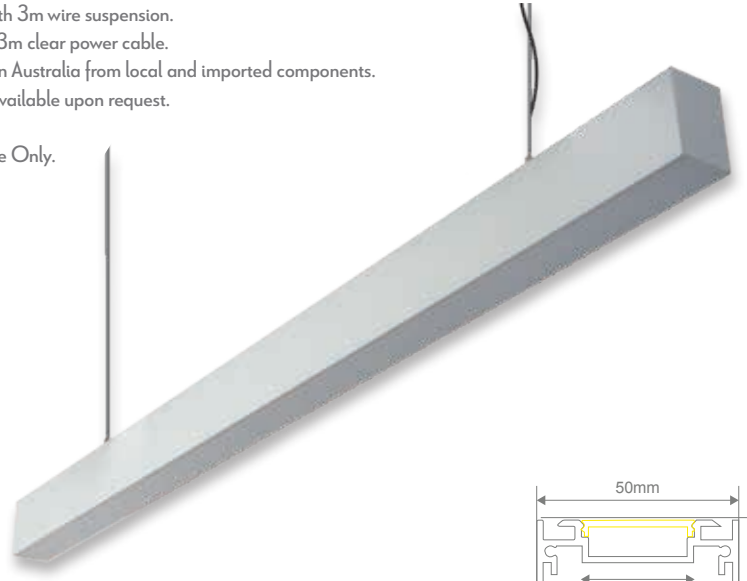




MAXI-50-DN-BLK




MAXI-50-DN-WHT

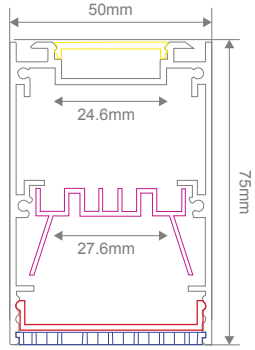



| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-1.2M | 30503 | 30510 | 30496 | 24W | Prismatic | 3000K | 2160lm |
| | 30504 | 30511 | 30497 | | Frosted | | |
| | 30505 | 30512 | 30498 | | Honeycomb | | |
| | 30506 | 30513 | 30499 | | Opal | | |
| | 30507 | 30514 | 30500 | | Black | | |
| | 30508 | 30515 | 30501 | | Clear | | |
| MAXI-50-1.2M | 30524 | 30531 | 30517 | 24W | Frosted | 4000K | 2400lm |
| | 30525 | 30532 | 30518 | | Prismatic | | |
| | 30526 | 30533 | 30519 | | Honeycomb | | |
| | 30527 | 30534 | 30520 | | Opal | | |
| | 30528 | 30535 | 30521 | | Black | | |
| | 30529 | 30536 | 30522 | | Clear | | |

## Maxi-50 1.7M Series

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- CRI90
- IP20 Indoor Use Only.

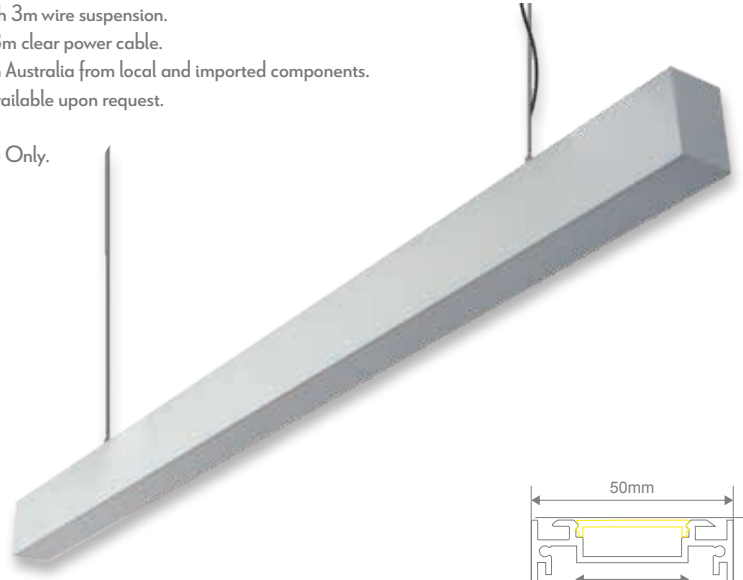




MAXI-50-DN-BLK



MAXI-50-DN-WHT

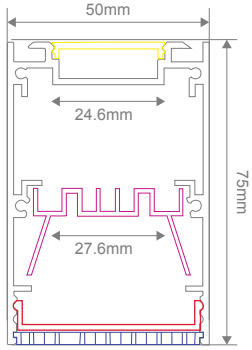


| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-1.7M | 30545 | 30552 | 30538 | 34W | Prismatic | 3000K | 3060lm |
| | 30546 | 30553 | 30539 | | Frosted | | |
| | 30547 | 30554 | 30540 | | Honeycomb | | |
| | 30548 | 30555 | 30541 | | Opal | | |
| | 30549 | 30556 | 30542 | | Black | | |
| | 30550 | 30557 | 30543 | | Clear | | |
| MAXI-50-1.7M | 30566 | 30573 | 30559 | 34W | Frosted | 4000K | 3400lm |
| | 30567 | 30574 | 30560 | | Prismatic | | |
| | 30568 | 30575 | 30561 | | Honeycomb | | |
| | 30569 | 30576 | 30562 | | Opal | | |
| | 30570 | 30577 | 30563 | | Black | | |
| | 30571 | 30578 | 30564 | | Clear | | |









## Maxi-50 2.4M Series

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- CRI90
- IP20 Indoor Use Only.

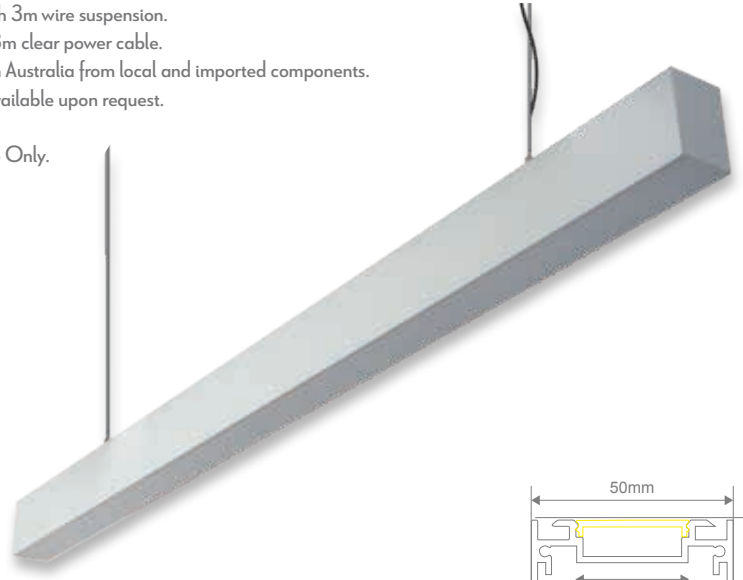




MAXI-50-DN-BLK



MAXI-50-DN-WHT

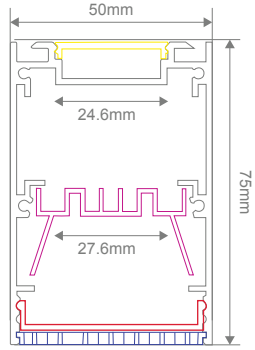


| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-50-2.4M | 30587 | 30594 | 30580 | 48W | Prismatic | 3000K | 4320lm |
| | 30588 | 30595 | 30581 | | Frosted | | |
| | 30589 | 30596 | 30582 | | Honeycomb | | |
| | 30590 | 30597 | 30583 | | Opal | | |
| | 30591 | 30598 | 30584 | | Black | | |
| | 30592 | 30599 | 30585 | | Clear | | |
| MAXI-50-2.4M | 30608 | 30615 | 30601 | 48W | Frosted | 4000K | 4800lm |
| | 30609 | 30616 | 30602 | | Prismatic | | |
| | 30610 | 30617 | 30603 | | Honeycomb | | |
| | 30611 | 30618 | 30604 | | Opal | | |
| | 30612 | 30619 | 30605 | | Black | | |
| | 30613 | 30620 | 30606 | | Clear | | |

## Maxi-Curve 1.2M Series

Suspension · Dimmable · Voltage 240V · 120° Beam Angle · Replacement 3yr Warranty

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- CRI90
- IP20 Indoor Use Only.






MAXI-CURVE-DN-BLK



MAXI-CURVE-DN-WHT




| Item No. | Variants Blk | Variants Wht | Variants Alu | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| MAXI-CURVE-1.2M | 30377 | 30384 | 30370 | 24W | Prismatic | 3000K | 2160lm |
| | 30378 | 30385 | 30371 | | Frosted | | |
| | 30379 | 30386 | 30372 | | Honeycomb | | |
| | 30380 | 30387 | 30373 | | Opal | | |
| | 30381 | 30388 | 30374 | | Black | | |
| | 30382 | 30389 | 30375 | | Clear | | |
| MAXI-CURVE-1.2M | 30398 | 30404 | 30391 | 24W | Frosted | 4000K | 2400lm |
| | 30399 | 30405 | 30392 | | Prismatic | | |
| | 30400 | 30406 | 30393 | | Honeycomb | | |
| | 30401 | 30407 | 30394 | | Opal | | |
| | 30402 | 30408 | 30395 | | Black | | |
| | 30403 | 30409 | 30396 | | Clear | | |







## Maxi-Curve 1.7M Series

Suspension · Dimmable · Voltage 240V · 120° Beam Angle · Replacement 3yr Warranty

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- CRI90
- IP20 Indoor Use Only.






MAXI-CURVE-DN-BLK



MAXI-CURVE-DN-WHT




| Item No. | Variants Blk | Variants Wht | Variants Alu | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| MAXI-CURVE-1.7M | 30419 | 30426 | 30412 | 34W | Prismatic | 3000K | 3060lm |
| | 30420 | 30427 | 30413 | | Frosted | | |
| | 30421 | 30428 | 30414 | | Honeycomb | | |
| | 30422 | 30429 | 30415 | | Opal | | |
| | 30423 | 30430 | 30416 | | Black | | |
| | 30424 | 30431 | 30417 | | Clear | | |
| MAXI-CURVE-1.7M | 30440 | 30447 | 30433 | 34W | Frosted | 4000K | 3400lm |
| | 30441 | 30448 | 30434 | | Prismatic | | |
| | 30442 | 30449 | 30435 | | Honeycomb | | |
| | 30443 | 30450 | 30436 | | Opal | | |
| | 30444 | 30451 | 30437 | | Black | | |
| | 30445 | 30452 | 30438 | | Clear | | |

## Maxi-Curve 2.4M Series

- Profile includes Driver and PLEX-COB-20W LED Strip.
- Aluminium profile and diffuser.
- Inbuilt LED Driver.
- Adjustable length 3m wire suspension.
- Complete with 3m clear power cable.
- Made to order in Australia from local and imported components.
- DALI Options available upon request.
- CRI90
- IP20 Indoor Use Only.






MAXI-CURVE-DN-BLK



MAXI-CURVE-DN-WHT




| Item No. | Variants | | | Wattage | Diffuser | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | Alu | | | | |
| MAXI-CURVE-2.4M | 30461 | 30468 | 30454 | 48W | Prismatic | 3000K | 4320lm |
| | 30462 | 30469 | 30455 | | Frosted | | |
| | 30463 | 30470 | 30456 | | Honeycomb | | |
| | 30464 | 30471 | 30457 | | Opal | | |
| | 30465 | 30472 | 30458 | | Black | | |
| | 30466 | 30473 | 30459 | | Clear | | |
| MAXI-CURVE-2.4M | 30482 | 30489 | 30475 | 48W | Frosted | 4000K | 4800lm |
| | 30483 | 30490 | 30476 | | Prismatic | | |
| | 30484 | 30491 | 30477 | | Honeycomb | | |
| | 30485 | 30492 | 30478 | | Opal | | |
| | 30486 | 30493 | 30479 | | Black | | |
| | 30487 | 30494 | 30480 | | Clear | | |








## Strap Series

- Part of a family of matching pendant, table, floor lamp and wall light.







| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Wht | | |
| STRAP-TL | 22720 | 22721 | 25W LED Max | 1xE27 Globe (Not Included) |

## Allegra Series

- Part of a family of matching pendant, table and floor lamp.



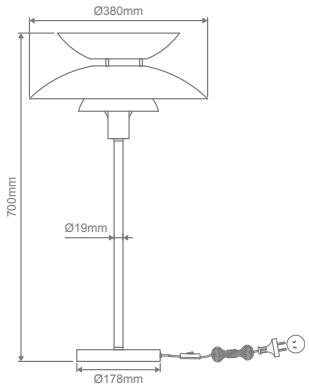


| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Blk | Wht | Schr | | |
| ALLEGRA-TL | 22704 | 22705 | 22706 | 25W LED Max | 1xE27 Globe (Not Included) |










## Forge

- Part of a family of matching pendant, table lamp and floor lamp.




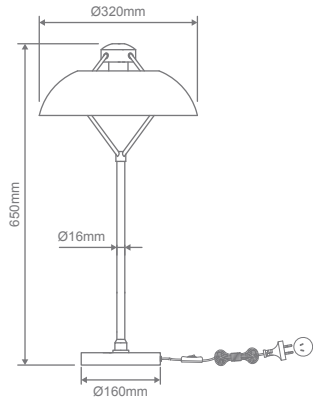


| Item No. | Variants | Wattage | Requires |
|---|---|---|---|
| FORGE-TL | 22712 | 25W LED Max | 1xE27 Globe (Not Included) |

## Sands

- Part of a family of matching pendant and table lamp.
- Natural Plywood wood finish.

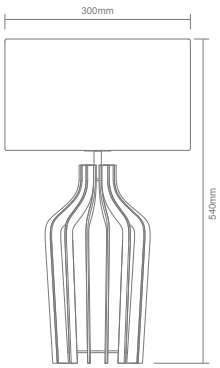




| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| SANDS-TL | 22750 | 25W LED Max | 1xE27 Globe (Not Included) |







## Ashley Series

- Part of a family of matching pendant, table lamp, floor lamp and desk lamp.
- Matt Black plated with Antique Brass highlights and a black cloth shade.
- Available in three sizes.




*Small*





*Medium*



*Large*

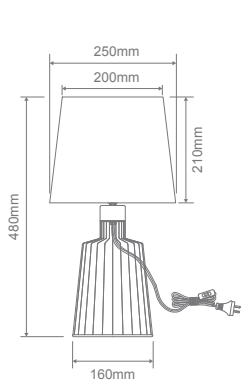

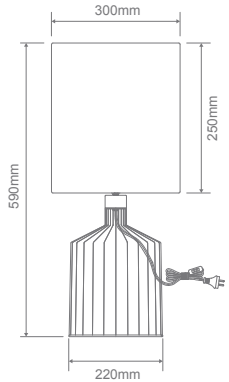
| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Small | Medium | Large | | |
| ASHLEY-TL | 22512 | 22513 | 22514 | 25W LED Max | 1xE27 Globe (Not Included) |

## Giana Series


- Square tube base with linen fabric shade.
- Includes 2A USB port.
- Available in the choice of Satin Brass metalware with a black shade, or Satin Chrome metalware with a white shade.



GIANA-TL-SCHR



GIANA-TL-SBRS

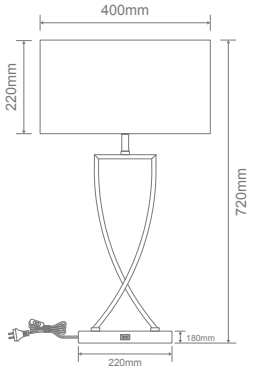


Depth of shade is 160mm

| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Satin Brass | Satin Chrome | | |
| GIANA-TL | 22542 | 22543 | 25W LED Max | 1xE27 Globe (Not Included) |








## Sandra Series

- Available Antique Brass or Satin Chrome base complete. with a cylindrical white linen fabric shade.



SANDRA-TL-SCHR

SANDRA-TL-ABR

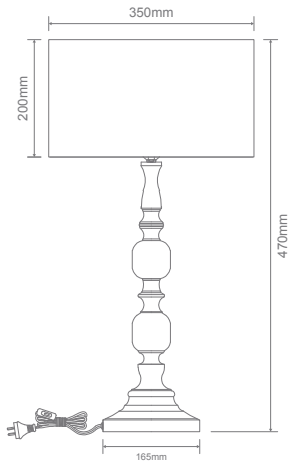


| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Antique Brass | Satin Chrome | | |
| SANDRA-TL | 22545 | 22546 | 25W LED Max | 1xE27 Globe (Not Included) |

## Carter Series


- Modern thin paper rope shade design.
- Featuring a choice of Black base with Black shade or Natural base with White shade options.



*Black*



*Natural*

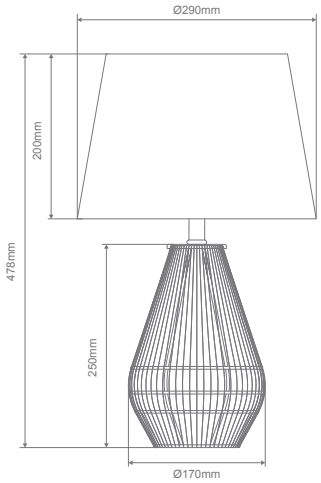


| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | *Blk* | *Ntr* | | |
| CARTER-TL | 23146 | 23147 | 25W LED Max | 1xE27 Globe (Not Included) |








## Ashley

- Metal base, thin frame and wire guard shade.
- Featuring plated Matt Black with Antique Brass highlights.
- Part of a family of matching pendant, table lamp, floor lamp and desk lamp.



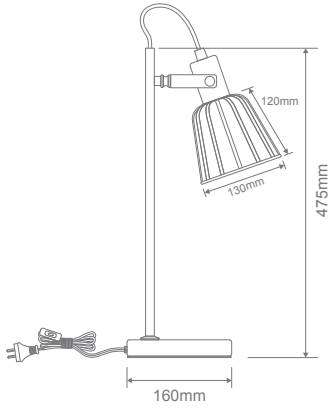


| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| ASHLEY-DL | 22516 | 25W LED Max | 1xE14 Globe (Not Included) |


## Leah Series

- Metal base, thin metal frame and a traditional conical shade.
- Available Matt White and Matt Black with Antique Brass highlights.
- Part of a family of matching desk lamp and floor lamp.



LEAH-DL-WHT

LEAH-DL-BLK

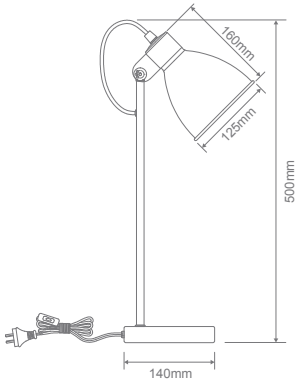


| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Wht | | |
| LEAH-DL | 22536 | 22537 | 25W LED Max | 1xE27 Globe (Not Included) |








## Marisol

- White marble base, thin frame and metal cylindrical shade.
- Featuring plated Antique Brass and painted Black Shade.
- Part of a family of matching desk lamp and floor lamp.



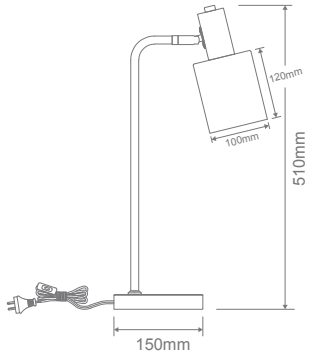



| Item No. | Variants | Wattage | Requires |
|---|---|---|---|
| MARISOL-DL | 22522 | 25W LED Max | 1xE14 Globe (Not Included) |

## Rustica

- Metal base, thin frame and a wire mesh shade.
- Featuring plated Matt Black with Antique Brass highlights.
- Part of a family of matching desk lamp and floor lamp.



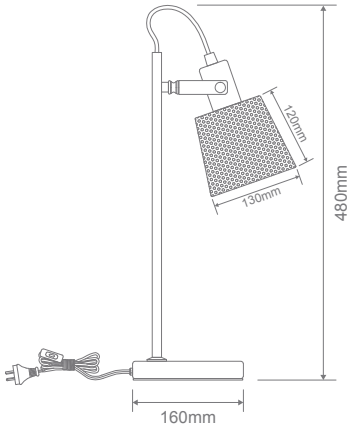


| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| RUSTICA-DL | 22519 | 25W LED Max | 1xE14 Globe (Not Included) |








## Tinley Series

- Slim metal tube design and an adjustable knuckle holding a stylish dome shade.
- Available in Antique Chrome, Antique Brass and Antique Copper.
- Part of a family of matching table lamp, and floor lamp.



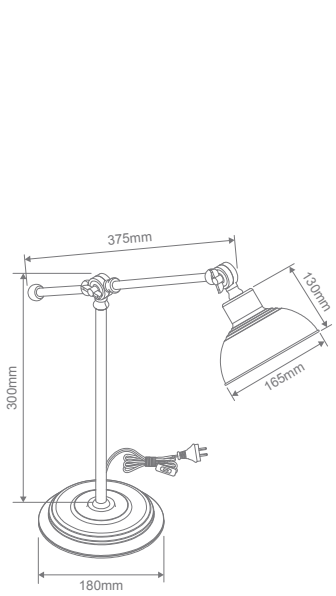




| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | A/Brs | A/Chr | A/Cop | | |
| TINLEY-DL | 22525 | 22526 | 22527 | 25W LED Max | 1xE27 Globe (Not Included) |

## Carter Series

- Modern thin paper rope shade design.
- Featuring Matt Black metalware with a choice of Black or Natural colour shade options.

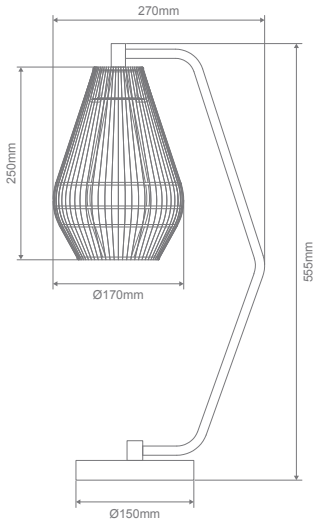


| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Ntr | | |
| CARTER-DL | 23148 | 23149 | 25W LED Max | 1xE27 Globe (Not Included) |









## Strap Series

- Part of a family of matching pendant, table, floor lamp and wall light.

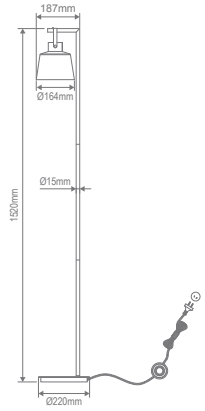

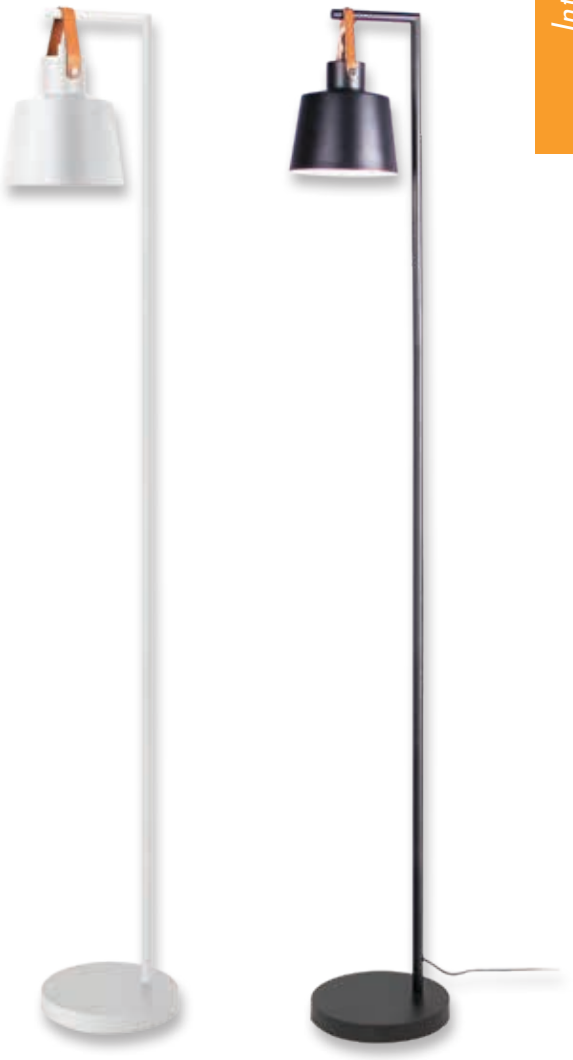



| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Wht | | |
| STRAP-FL | 22718 | 22719 | 25W LED Max | 1xE27 Globe (Not Included) |

## Allegra Series

- Part of a family of matching pendant, table lamp and floor lamp.



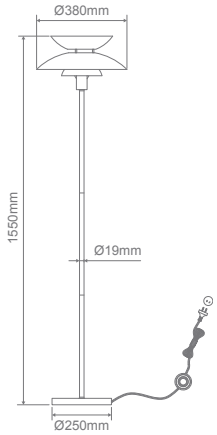


| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Blk | Wht | Schr | | |
| ALLEGRA-FL | 22707 | 22708 | 22709 | 25W LED Max | 1xE27 Globe (Not Included) |








## Forge

- Part of a family of matching pendant, table lamp and floor lamp.



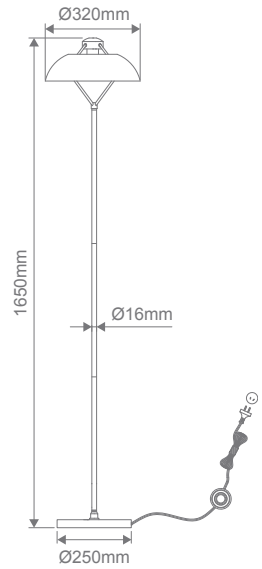



| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| FORGE-FL | 22713 | 25W LED Max | 1xE27 Globe (Not Included) |

## Ashley

- Metal base, thin frame and a wire mesh shade.
- Featuring plated Matt Black with Antique Brass highlights.
- Part of a family of matching pendant, table lamp, floor lamp and desk lamp.



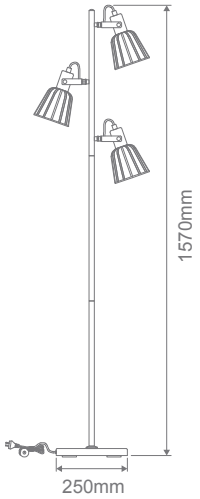


| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| ASHLEY-3FL | 22517 | 3x25W LED Max | 3xE14 Globes (Not Included) |








## Cyclops

- Features a 20W LED uplighter (Mother) and a 7W task light (Child).
- Push and hold dimmable function available for both lights.
- Push switchable 4-CCT colour temperature options (3000K - 4000K - 5000K - 6000K).



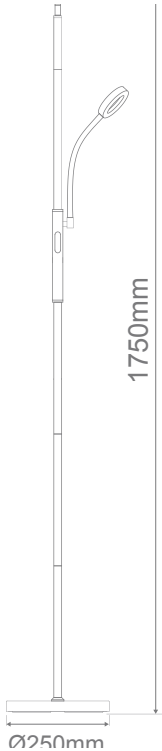



| Item No. | Variant | CCT |
|---|---|---|
| CYCLOPS-FL | 22832 | QUAD |

## Samson

- Features a 30W LED uplighter (Mother) and a 5W task light (Child).
- Push and hold dimmable function available for both lights.
- Push switchable 4-CCT colour temperature options (3000K - 4000K - 5000K - 6000K).



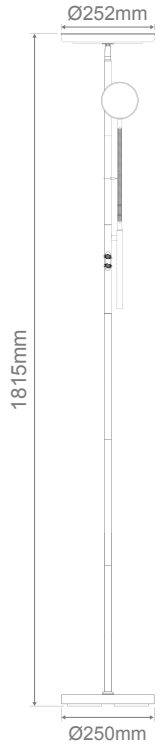


| Item No. | Variant | CCT |
|---|---|---|
| SAMSON-FL | 22830 | QUAD |










## Eden Series

- Features an 18W LED uplighter (Mother) and a 5W task light (Child).
- Available in Black, Satin Chrome and Antique Brass finishes, with a white frosted glass for the uplighter.
- Dimmable dials available for both lights, producing a nice warm 3000K Warm White LED colour temperature.



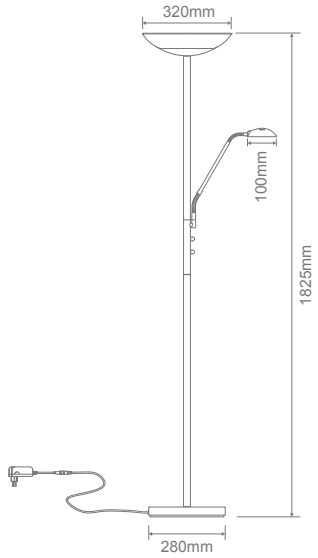




| Item No. | Variants | | | CCT |
|---|---|---|---|---|
| | A/Brs | Blk | S/Chr | |
| EDEN-FL | 22500 | 22501 | 22502 | 3000K |

## Elsa Series

- Chrome highlights with painted metal.
- Featuring an adjustable head to direct light to desired area.

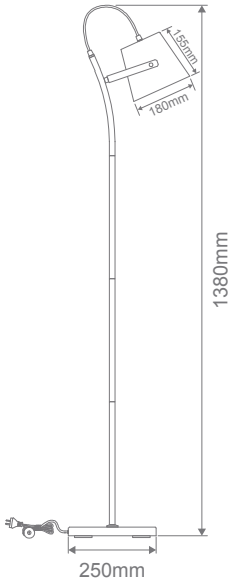




| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Wht | | |
| ELSA-FL | 22533 | 22534 | 25W LED Max | 1xE27 Globe (Not Included) |








## Leah Series

- Metal base, thin metal frame and a traditional conical shade.
- Available Matt White and Matt Black with Antique Brass highlights.
- Part of a family of matching desk lamp and floor lamp.

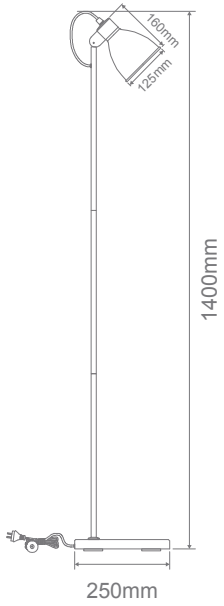





| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Wht | | |
| LEAH-FL | 22539 | 22540 | 25W LED Max | 1xE27 Globe (Not Included) |

## Marisol

Voltage 240V | Replacement 12 month Warranty

- White marble base, thin frame and metal cylindrical shade.
- Featuring plated Antique Brass and painted Black Shade.
- Part of a family of matching desk lamp and floor lamp.



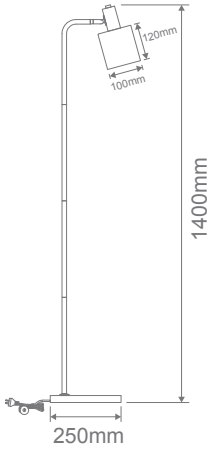


| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| MARISOL-FL | 22523 | 25W LED Max | 1xE14 Globe (Not Included) |








## Rustica

Voltage 240V | Replacement 12 month Warranty

- Metal base, thin frame and a wire mesh shade.
- Featuring plated Matt Black with Antique Brass highlights.
- Part of a family of matching desk lamp and floor lamp.



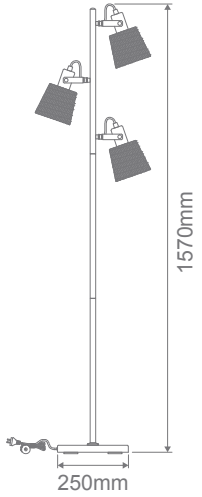


| Item No. | Variant | Wattage | Requires |
|---|---|---|---|
| RUSTICA-FL | 22520 | 3x25W LED Max | 3xE14 Globes (Not Included) |

## Tinley Series

- Slim metal tube design and an adjustable knuckle holding a stylish dome shade.
- Available in Antique Chrome, Antique Brass and Antique Copper.
- Part of a family of matching table lamp and floor lamp.






| Item No. | Variants | | | Wattage | Requires |
|---|---|---|---|---|---|
| | Abrs | Achr | Acop | | |
| TINLEY-FL | 22529 | 22530 | 22531 | 25W LED Max | 1xE27 Globe (Not Included) |








## Carter Series

- Modern thin paper rope shade design.
- Featuring Matt Black metalware with a choice of Black or Natural colour shade options.

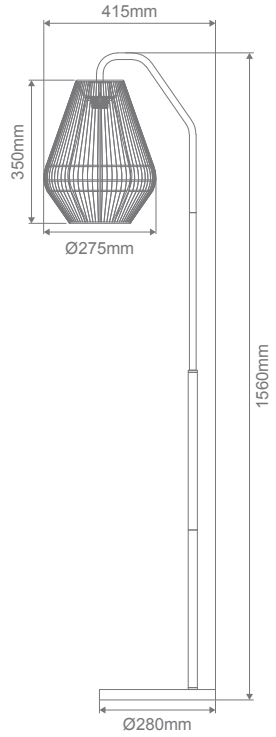






| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | *Blk* | *Ntr* | | |
| CARTER-FL | 23150 | 23151 | 25W LED Max | 1xE27 Globe (Not Included) |

## Charge-01 Series

- Bedside wall light with wireless charging phone shelf.
- USB Charging port.
- 2W Focus Tricolour Swithable light.
- Fully dimmable with suitable dimmers.

*Wireless Charging Shelf*



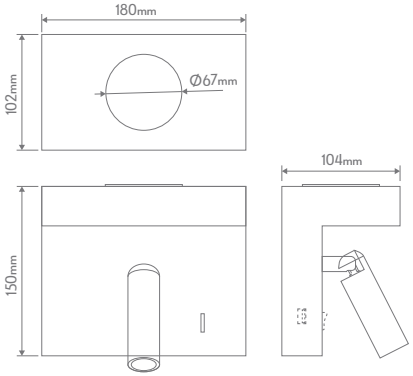


| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|
| | Blk | Wht | | | | |
| CHARGE-01 | 22695 | 22696 | 2W | 20 | TRIO | 150lm |






## Charge-02 Series

- Touch Switch.
- Left and right USB charging ports.
- Dimmable by pressing and holding touch switch.
- Focus LED Light + Backlit LED Light.
- Bedside wall light with phone shelf.





*This model features a backlit LED Light, but requires cable to plug into USB to charge phone*

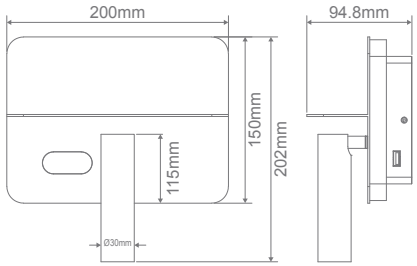


| Item No. | Variants | | Wattage | | IP Rating | CCT | Lumen Output | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | Focus | Ambient | | | Focus | Ambient |
| CHARGE-02 | 22697 | 22698 | 4.5W | 4.5W | 40 | 3000K | 350lm | 300lm |




LUMALINE-2-900



## Lumaline-2 Series

- Profile includes Driver and Plex-19.2 strip.
- Light emits upwards and downwards.
- Aluminium profile and PMMA opal diffuser.
- Made to order in Australia from local and imported components.



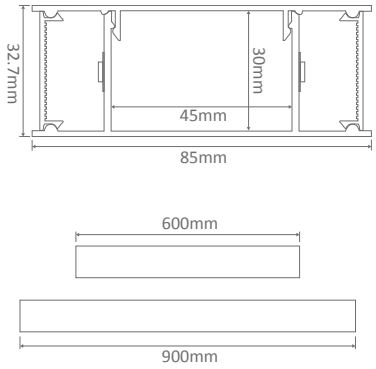





| Item No. | Variants | Wattage | Colour | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|
| LUMALINE-2-600 | 23600 | 2x11.5W | Aluminium | 20 | 3000K | 2x830lm |
| | 23602 | | | | 4000K | 2x899lm |
| | 23604 | | | | 5000K | 2x899lm |
| | 23610 | | Black | | 3000K | 2x830lm |
| | 23612 | | | | 4000K | 2x899lm |
| | 23614 | | | | 5000K | 2x899lm |
| | 23620 | | White | | 3000K | 2x830lm |
| | 23622 | | | | 4000K | 2x899lm |
| | 23624 | | | | 5000K | 2x899lm |
| LUMALINE-2-900 | 23650 | 2x17.5W | Aluminium | 20 | 3000K | 2x1244lm |
| | 23652 | | | | 4000K | 2x1348lm |
| | 23654 | | | | 5000K | 2x1348lm |
| | 23660 | | Black | | 3000K | 2x1244lm |
| | 23662 | | | | 4000K | 2x1348lm |
| | 23664 | | | | 5000K | 2x1348lm |
| | 23670 | | White | | 3000K | 2x1244lm |
| | 23672 | | | | 4000K | 2x1348lm |
| | 23674 | | | | 5000K | 2x1348lm |








SHADOWLINE-900




## Shadowline Series

- Profile includes Driver and Plex-14.4 strip.
- Aluminium profile and PMMA opal diffuser.
- Made to order in Australia from local and imported components.



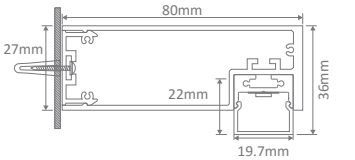

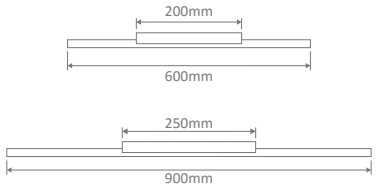




| Item No. | Variants | Wattage | Colour | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|
| SHADOWLINE-600 | 23500 | 9W | Aluminium | 20 | 3000K | 660lm |
| | 23502 | | | | 4000K | 708lm |
| | 23504 | | | | 5000K | 708lm |
| | 23510 | | Black | | 3000K | 660lm |
| | 23512 | | | | 4000K | 708lm |
| | 23514 | | | | 5000K | 708lm |
| | 23520 | | White | | 3000K | 660lm |
| | 23522 | | | | 4000K | 708lm |
| | 23524 | | | | 5000K | 708lm |
| SHADOWLINE-900 | 23550 | 13W | Aluminium | 20 | 3000K | 990lm |
| | 23552 | | | | 4000K | 1062lm |
| | 23554 | | | | 5000K | 1062lm |
| | 23560 | | Black | | 3000K | 990lm |
| | 23562 | | | | 4000K | 1062lm |
| | 23564 | | | | 5000K | 1062lm |
| | 23570 | | White | | 3000K | 990lm |
| | 23572 | | | | 4000K | 1062lm |
| | 23574 | | | | 5000K | 1062lm |

## Strap Series

- Part of a family of matching pendant, table, floor lamp and wall light.






| Item No. | Variants | | Wattage | Requires |
|---|---|---|---|---|
| | Blk | Wht | | |
| STRAP-WB | 22722 | 22723 | 25W LED Max | 1xE27 Globe (Not Included) |











## Glow 8 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.






| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| GLOW-8 | 22660 | 22661 | 8W | 20 | TRIO | 320lm | 350lm | 400lm |

## Moon Wall Series


- SMD LED Chip.
- 6W/9W Power Switchable.
- 45° Tiltable, 355° Rotatable.
- Fully dimmable with suitable dimmers.
- Optional coloured baffles available for Tube or Spot Reflectors.
- CRI 90




MOON-WALL-SPOT



MOON-WALL-TUBE




| Item No. | | Variants Blk | Variants Wht | Wattage | IP | CCT |
|---|---|---|---|---|---|---|
| MOON-WALL | FLD | 22820 | 22821 | 6/9W | 20 | TRIO |
| | OPAL | 22822 | 22823 | | | |
| | SPOT | 22824 | 22825 | | | |
| | TUBE | 22826 | 22827 | | | |

6W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 477lm | 433lm | 498lm | 430lm | 556lm | 504lm | 534lm | 504lm | 561lm | 513lm | 536lm | 515lm |

9W - Lumen Output

| Warm White 3000K | | | | Neutral White 4000K | | | | White 5700K | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° | Fld-60° | Opal-130° | Spot-30° | Tube-60° |
| 651lm | 600lm | 661lm | 593lm | 780lm | 719lm | 756lm | 716lm | 775lm | 729lm | 751lm | 708lm |









MOON-WALL-OPAL




MOON-WALL-FLD




**Up to 45° tilt, 355° Rotation**

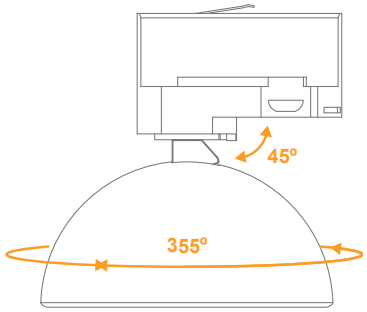



## Sinta Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.





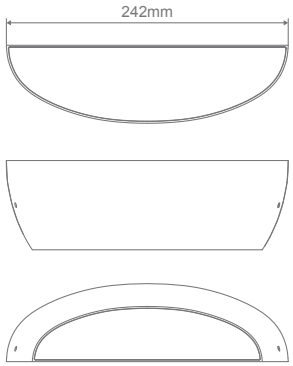


| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| SINTA-8 | 22674 | 22675 | 8W | 20 | TRIO | 700lm | 725lm | 750lm |










## Deens 8

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.



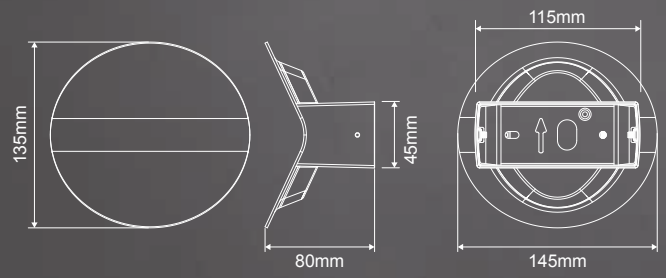






| Item No. | Variants | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| DEENS-8 | 22679 | 22680 | 8W | 20 | TRIO | 660lm | 680lm | 700lm |

## Mirror Series

- Aluminium profile and PMMA opal diffuser.
- Adjustable Polished chrome knuckles.

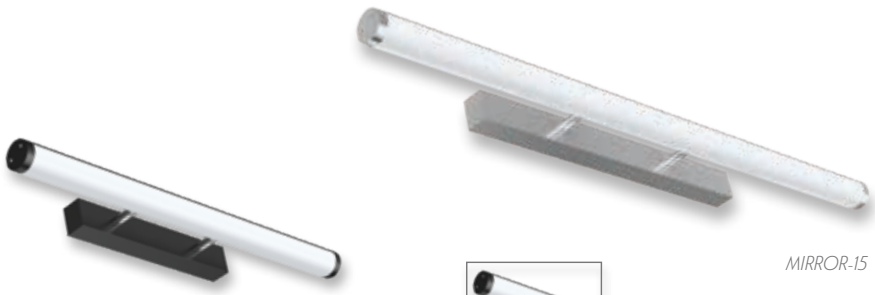

MIRROR-15



MIRROR-10




MIRROR-15-BLK



MIRROR-10-SCH



MIRROR-15-CHR




MIRROR-10-CHR




MIRROR-15-WHT




MIRROR-10-WHT




MIRROR-15-SBRS



MIRROR-10-SBRS



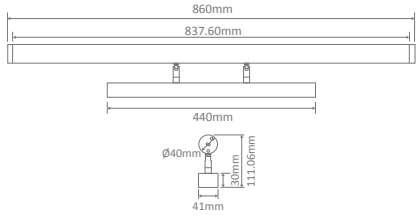
| Item No. | Variants | | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | Blk | Chr | Schr | Wht | Sbrs | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| MIRROR-10 | 12001 | 12003 | 12005 | 12007 | 12009 | 10W | 40 | TRIO | 1040lm | 1110lm | 1180lm |
| MIRROR-15 | 12011 | 12013 | 12015 | 12017 | 12019 | 15W | 40 | TRIO | 1590lm | 1718lm | 1845lm |







## Mirror Series

- Aluminium profile and PMMA opal diffuser.
- Adjustable Polished chrome knuckles.



MIRROR-20-CHR



MIRROR-20-BLK




MIRROR-20-SCH



MIRROR-20-WHT



MIRROR-20-SBRS

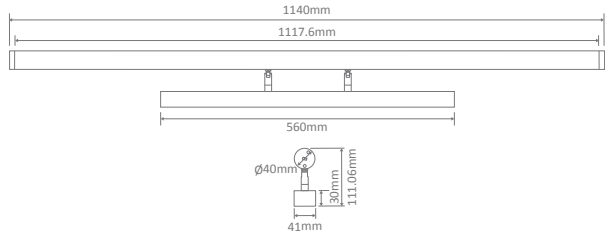


| Item No. | Variants | | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | Blk | Chr | Schr | Wht | Sbrs | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| MIRROR-20 | 12021 | 12023 | 12025 | 12027 | 12029 | 20W | 40 | TRIO | 2100lm | 2200lm | 2300lm |

## Mirror Side Series

- Aluminium profile and PMMA opal diffuser.
- Available in 450mm (6W) and 600mm (8W) sizes.
- Available in White, Black, Chrome and Satin Brass colour options.
- 160° Beam Angle.



MIRROR-SIDE-600



MIRROR-SIDE-450



160° Light Emitting



MIRROR-SIDE-BLACK




MIRROR-SIDE-CHROME




MIRROR-SIDE-SATIN-BRASS



MIRROR-SIDE-WHITE



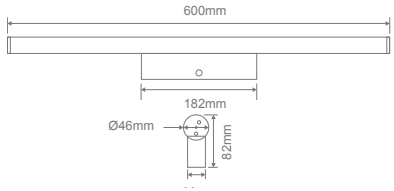
| Item No. | Variants | | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Blk | Chr | Sbrs | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| MIRROR-SIDE-450 | 12040 | 12042 | 12043 | 12041 | 6W | 44 | TRIO | 640lm | 735lm | 830lm |
| MIRROR-SIDE-600 | 12046 | 12048 | 12049 | 12047 | 8W | 44 | TRIO | 900lm | 1050lm | 1200lm |







## HL-804 Series



White



Black




Chrome



Satin Chrome

| Item No. | Variants | | | | Requires |
|---|---|---|---|---|---|
| | Blk | Chr | Schr | Wht | |
| HL-804-4LT | 16318 | 16320 | 16323 | 16324 | 4xB15 Globes *(Not included)* |
| HL-804-5LT | 16327 | 16329 | 16332 | 16333 | 5xB15 Globes *(Not included)* |
| HL-804-6LT | 16336 | 16338 | 16341 | 16342 | 6xB15 Globes *(Not included)* |
| HL-804-7LT | 16345 | 16347 | 16350 | 16351 | 7xB15 Globes *(Not included)* |
| HL-804-8LT | 16354 | 16356 | 16359 | 16360 | 8xB15 Globes *(Not included)* |

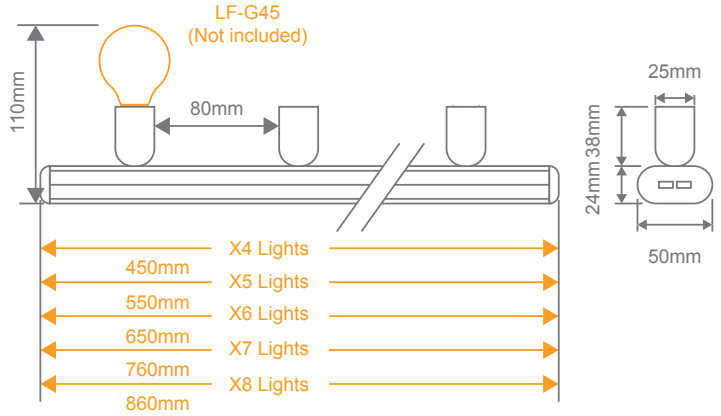


## BF-2012

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2012 | 11034 | Raw | 1xG9 (Not Included) |







*Replacement Globe*


KEY-G9-TRIO 65126

## BF-2013

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2013 | 11074 | Raw | 1xG9 (Not Included) |

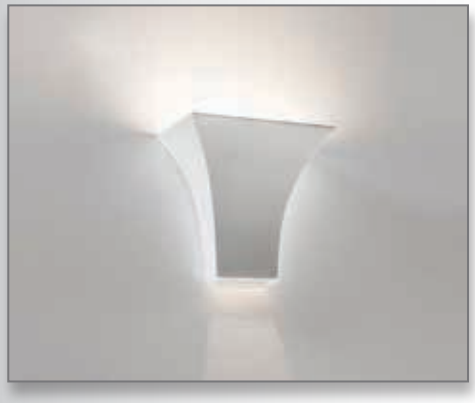




*Replacement Globe*

KEY-G9-TRIO 65126












## BF-2014

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2014 | 11035 | Raw | 2xG9 (Not Included) |



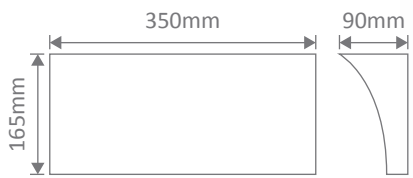


*Replacement Globe*


KEY-G9-TRIO 65126

## BF-2018

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2018 | 11075 | Raw | 1xG9 (Not Included) |






*Replacement Globe*


KEY-G9-TRIO 65126

## BF-2019

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2019 | 11076 | Raw | 2xG9 (Not Included) |






*Replacement Globe*


KEY-G9-TRIO 65126

## BF-2020

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2020 | 11077 | Raw | 2xG9 (Not Included) |



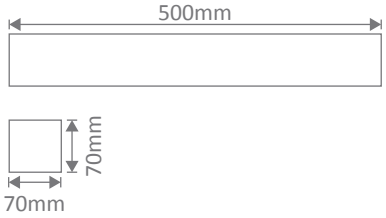


*Replacement Globe*

KEY-G9-TRIO 65126








## BF-2185

Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2185 | 11036 | Raw | 1xG9 (Not Included) |

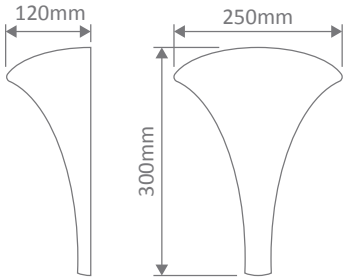





*Replacement Globe*

KEY-G9-TRIO 65126

## BF-2350

Raw modern round indirect wall light. Creates a soft and subtle feature for feature wall lighting. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2350 | 11080 | Raw | 1xG9 (Not Included) |






*Replacement Globe*


KEY-G9-TRIO 65126



## BF-2440

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2440 | 11081 | Raw | 1xE27 (Not Included) |

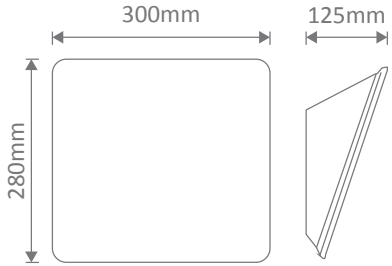





## BF-2601A

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2601A | 11082 | Raw | 1xG9 (Not Included) |




*Replacement Globe*

KEY-G9-TRIO 65126












## BF-2601B

Raw ceramic modern uplight wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2601B | 11083 | Raw | 1xG9 (Not Included) |







*Replacement Globe*

KEY-G9-TRIO 65126

## BF-2607A

Raw ceramic uplight wall light. Light emits Upwards only. Ceramic areas can be painted with any water based paint

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2607A | 11084 | Raw | 1xG9 (Not Included) |






*Replacement Globe*


KEY-G9-TRIO 65126



## BF-2607B

Raw ceramic wall light. Light emits upwards and downwards through an opening in the bottom of the fitting. Ceramic areas can be painted with any water based paint

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2607B | 11085 | Raw | 1xG9 (Not Included) |




*Replacement Globe*


KEY-G9-TRIO 65126



## BF-2608A

Raw ceramic uplight wall light. Light emits Upwards only. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2608A | 11090 | Raw | 2xG9 (Not Included) |




*Replacement Globe*

KEY-G9-TRIO 65126








## BF-7577

Raw ceramic wall light. Ceramic areas can be painted with any water based paint

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-7577 | 11042 | Raw | 1xE27 (Not Included) |







## BF-7578

Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-7578 | 11044 | Raw | 1xE27 (Not Included) |

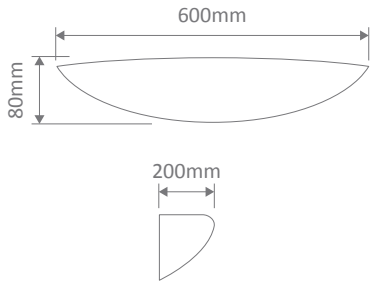





# Ceramic Wall Lights

## BF-2608B

Raw ceramic wall light. Light emits upwards and downwards through an opening in the bottom of the fitting. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-2608B | 11091 | Raw | 2xG9 (Not Included) |







*Replacement Globe*

KEY-G9-TRIO 65126

## BF-7310

Raw ceramic wall light. Ceramic areas can be painted with any water based paint. Made in Italy.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-7310 | 11040 | Raw | 1xE27 (Not Included) |

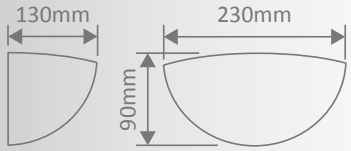







*BF-2608B*



## BF-7603

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-7603 | 11049 | Raw | 1xE27 (Not Included) |







## BF-7908

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-7908 | 11051 | Raw | 1xE27 (Not Included) |















## BF-7949

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint. Corner mounted installations only.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-7949 | 11101 | Raw | 1xE27 (Not Included) |







## BF-8042

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8042 | 11102 | Raw | 1xE27 (Not Included) |









## BF-8235

Raw ceramic wall light complete with open slot. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8235 | 11115 | Raw | 1xE27 (Not Included) |









## BF-8258

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8258 | 11116 | Raw | 1xE27 (Not Included) |

















## BF-8284

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8284 | 11121 | Raw | 2xG9 (Not Included) |









*Replacement Globe*

KEY-G9-TRIO 65126

## BF-8286

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8286 | 11122 | Raw | 1xE27 (Not Included) |











## BF-8259

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8259 | 11118 | Raw | 1xE27 (Not Included) |







## BF-8276

Raw ceramic wall light. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8276 | 11120 | Raw | 2xG9 (Not Included) |




*Replacement Globe*

KEY-G9-TRIO 65126












## BF-8411

Raw ceramic wall light complete with frosted glass. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8411 | 11131 | Raw | 1xE27 (Not Included) |







## BF-8418

Raw ceramic wall light. Light emits both ways. Ceramic areas can be painted with any water based paint.

| Item No. | Variants | Colour | Lamp |
|---|---|---|---|
| BF-8418 | 11037 | Raw | 2xG9 (Not Included) |








*Replacement Globe*

KEY-G9-TRIO 65126

## Camino Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included (240V Version).
- Tricolour Switchable.
- Fully dimmable with suitable dimmers (240V Version).

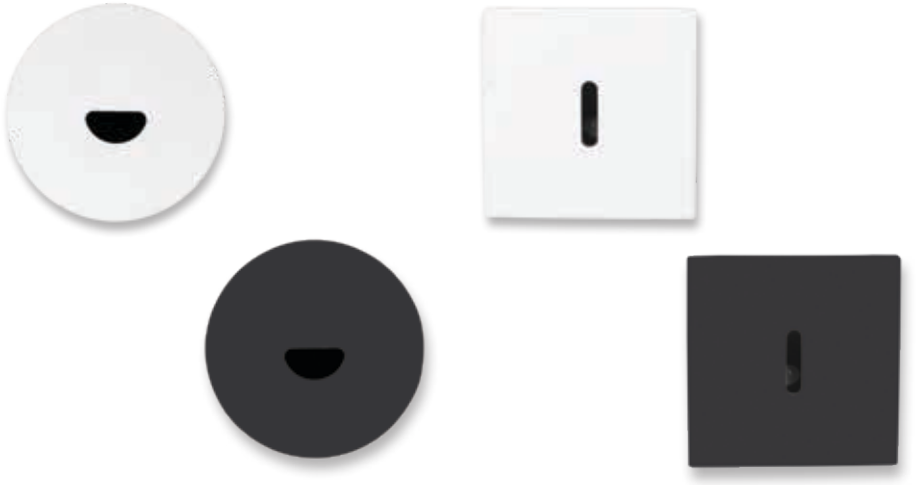

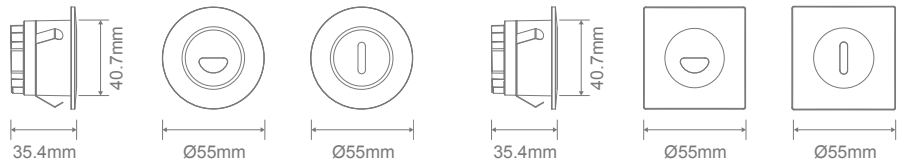


Cut-out: Ø45mm

Cut-out: Ø45mm

| Item No. | | Variant Blk | Variant Wht | Wattage | IP Rating | CCT | Lumen Output Warm White 3000K | Lumen Output Neutral White 4000K | Lumen Output White 5000K |
|---|---|---|---|---|---|---|---|---|---|
| CAMINO-240V-RND | ASY | 21747 | 21748 | 3W | 54 | TRIO | 62lm | 73lm | 66lm |
| | SLOT | 21741 | 21742 | | | | | | |
| CAMINO-240V-SQR | ASY | 21745 | 21746 | 3W | 54 | TRIO | 62lm | 73lm | 66lm |
| | SLOT | 21743 | 21744 | | | | | | |








## Camino Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included (240V Version).
- Tricolour Switchable.
- Fully dimmable with suitable dimmers (240V Version).




*The driver can be detached from the fitting*






Cut-out: L125xW50mm





| Item No. | Variant Blk | Variant Wht | Wattage | IP Rating | CCT | Lumen Output Warm White 3000K | Lumen Output Neutral White 4000K | Lumen Output White 5000K |
|---|---|---|---|---|---|---|---|---|
| CAMINO-240V-RECT | 21767 | 21763 | 3W | 54 | TRIO | 120lm | 140lm | 125lm |

# Strike 48


## 3 Blade 48" Ceiling Fan with no light / with optional light kit

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function



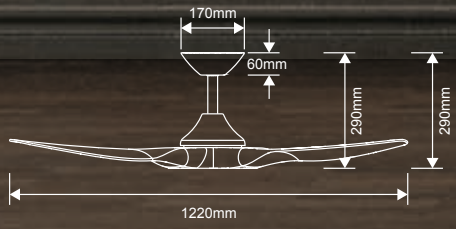


STRIKE-48

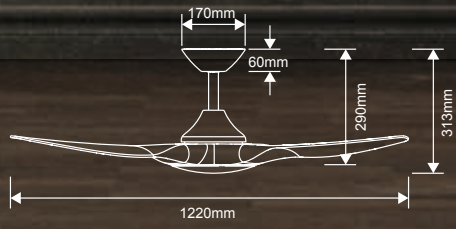


STRIKE-48-L

| Item No. | Variants | | | |
|---|---|---|---|---|
| | Wht/Wht | Blk/Blk | Blk/Wht | Wht/Oak |
| STRIKE-48 | 60130 | 60131 | 60132 | 60133 |
| STRIKE-LIGHT-KIT | Blk | | Wht | |
| | 60141 | | 60140 | |
| CFA-DR1 | 60100 | | 60101 | |







# Strike Light Kit

Optional Light Kit (Adaptable)
LED CCT Switchable Light













| Specification Features | | AirFlow m³/h | |
|---|---|---|---|
| Input Voltage: | 240V AC | Speed | |
| Motor: | 25W | 1 | 3975 |
| Type of Motor: | DC | 2 | 5086 |
| Blade Pitch: | 13° | 3 | 8646 |
| Blade Length: | 48" - 1220mm | 4 | 9768 |
| Construction: | ABS Polymer motor, canopy and blades | 5 | 10,585 |
| Winter/Summer Function: | Yes | 6 | 11,202 |
| IP Rating: | IPX0 | 7 | 12,653 |
| Extension Rod Available: | Yes | 8 | 13,048 |
| Remote Control: | Yes (9 Speed) | 9 | 13,859 |

| Optional Light Kit | | | | |
|---|---|---|---|---|
| Luminaire (LED): | 18W | Lumen Output: | | |
| CCT: | 3000K - 4000K - 6000K | 3000K | 4000K | 6000K |
| Dimmable: | Yes | 1800lm | 1900lm | 1950lm |
| Luminaire Lifespan (hrs): | 10,000hrs | | | |

| Warranty: | |
|---|---|
| Fan: | 3 Year In Home + 3 Year Parts Replacement |
| Receiver and remote: | 1 Year In Home + 1 Year Parts Replacement |


*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

# Strike 60


## 3 Blade 60" Ceiling Fan with no light / with optional light kit

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function



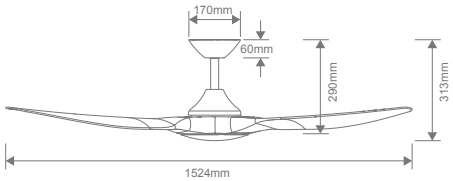


STRIKE-60

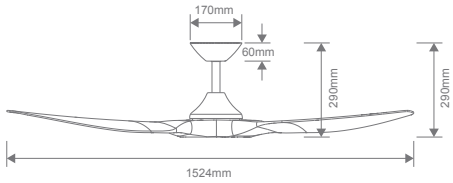


STRIKE-60-L

| Item No. | Variants | | | |
|---|---|---|---|---|
| | Wht/Wht | Blk/Blk | Blk/Wht | Wht/Oak |
| STRIKE-60 | 60135 | 60136 | 60137 | 60138 |
| STRIKE-LIGHT-KIT | Blk | | Wht | |
| | 60141 | | 60140 | |
| CFA-DR1 | 60100 | | 60101 | |





# Strike Light Kit

Optional Light Kit (Adaptable)
LED CCT Switchable Light














| Specification Features | | AirFlow m³/h | |
|---|---|---|---|
| Input Voltage: | 240V AC | Speed | |
| Motor: | 35W | 1 | 4558 |
| Type of Motor: | DC | 2 | 5672 |
| Blade Pitch: | 13° | 3 | 6113 |
| Blade Length: | 60" - 1520mm | 4 | 7977 |
| Construction: | ABS Polymer motor, canopy and blades | 5 | 9,842 |
| Winter/Summer Function: | Yes | 6 | 10,249 |
| IP Rating: | IPX0 | 7 | 12,113 |
| Extension Rod Available: | Yes | 8 | 14,245 |
| Remote Control: | Yes (9 Speed) | 9 | 16,302 |

| Optional Light Kit | | | | |
|---|---|---|---|---|
| Luminaire (LED): | 18W | Lumen Output: | | |
| CCT: | 3000K - 4000K - 6000K | 3000K | 4000K | 6000K |
| Dimmable: | Yes | 1800lm | 1900lm | 1950lm |
| Luminaire Lifespan (hrs): | 10,000hrs | | | |

| Warranty: | |
|---|---|
| Fan: | 3 Year In Home + 3 Year Parts Replacement |
| Receiver and remote: | 1 Year In Home + 1 Year Parts Replacement |


*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

# Blast 48


## 3 Blade 48" Ceiling Fan with no light / with optional light kit

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function



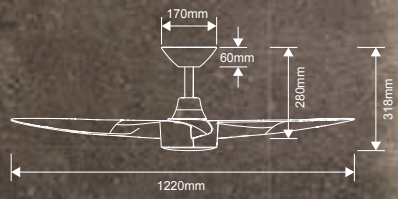


BLAST-48

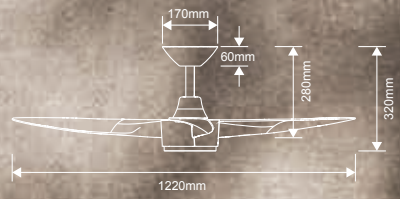


BLAST-48-L

| Item No. | Variants | |
|---|---|---|
| | Blk | Wht |
| BLAST-48 | 60146 | 60145 |
| BLAST-LIGHT-KIT | 60152 | 60151 |
| CFA-DR1 | 60100 | 60101 |





# Blast Light Kit

Optional Light Kit (Adaptable)
LED CCT Switchable Light







| Specification Features | | AirFlow m³/h | | |
|---|---|---|---|---|
| Input Voltage: | 240V AC | Speed | | |
| Motor: | 25W | 1 | 3975 | |
| Type of Motor: | DC | 2 | 5086 | |
| Blade Pitch: | 14.5° | 3 | 8646 | |
| Blade Length: | 48" - 1220mm | 4 | 9768 | |
| Construction: | ABS Polymer motor, canopy and blades | 5 | 10,585 | |
| Winter/Summer Function: | Yes | 6 | 11,202 | |
| IP Rating: | IPX0 | 7 | 12,653 | |
| Extension Rod Available: | Yes | 8 | 13,048 | |
| Remote Control: | Yes (9 Speed) | 9 | 13,859 | |
| **Optional Light Kit** | | | | |
| Luminaire (LED): | 18W | Lumen Output: | | |
| CCT: | 3000K - 4000K - 6000K | 3000K | 4000K | 6000K |
| Dimmable: | Yes | 1800lm | 1900lm | 1950lm |
| Luminaire Lifespan (hrs): | 10,000hrs | | | |

| Warranty: | |
|---|---|
| Fan: | 3 Year In Home + 3 Year Parts Replacement |
| Receiver and remote: | 1 Year In Home + 1 Year Parts Replacement |


*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

# Blast 52


## 4 Blade 52" Ceiling Fan with no light / with optional light kit

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function



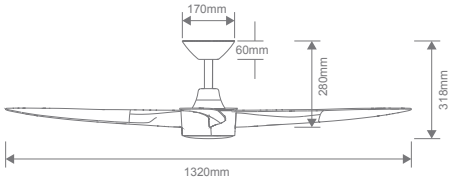


BLAST-52

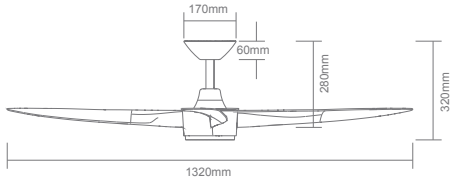


BLAST-52-L

| Item No. | Variants | |
|---|---|---|
| | Blk | Wht |
| BLAST-52 | 60149 | 60148 |
| BLAST-LIGHT-KIT | 60152 | 60151 |
| CFA-DR1 | 60100 | 60101 |





# Blast Light Kit

Optional Light Kit (Adaptable)
LED CCT Switchable Light







| Specification Features | | AirFlow m³/h | | |
|---|---|---|---|---|
| Input Voltage: | 240V AC | Speed | | |
| Motor: | 25W | 1 | 4165 | |
| Type of Motor: | DC | 2 | 4673 | |
| Blade Pitch: | 14.5° | 3 | 8963 | |
| Blade Length: | 52" - 1320mm | 4 | 9990 | |
| Construction: | ABS Polymer motor, canopy and blades | 5 | 10,843 | |
| Winter/Summer Function: | Yes | 6 | 11,665 | |
| IP Rating: | IPX0 | 7 | 12,074 | |
| Extension Rod Available: | Yes | 8 | 13,141 | |
| Remote Control: | Yes (9 Speed) | 9 | 14,305 | |

| Optional Light Kit | | | | |
|---|---|---|---|---|
| Luminaire (LED): | 18W | Lumen Output: | | |
| CCT: | 3000K - 4000K - 6000K | 3000K | 4000K | 6000K |
| Dimmable: | Yes | 1800lm | 1900lm | 1950lm |
| Luminaire Lifespan (hrs): | 10,000hrs | | | |

| Warranty: | |
|---|---|
| Fan: | 3 Year In Home + 3 Year Parts Replacement |
| Receiver and remote: | 1 Year In Home + 1 Year Parts Replacement |


*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

# Glide 80

## 6 Blade 80" Ceiling Fan with no light / with optional light kit

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function



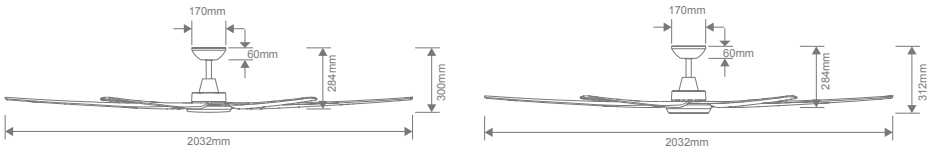


| Item No. | Variants | |
|---|---|---|
| | Blk | Wht |
| GLIDE-80 | 60157 | 60156 |
| GLIDE-LIGHT-KIT | 60162 | 60161 |
| CFA-DR1 | 60100 | 60101 |








# Glide Light Kit

Optional Light Kit (Adaptable)
LED CCT Switchable Light

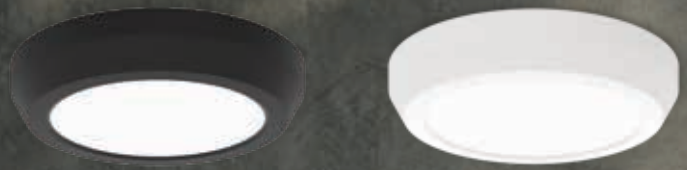





| Specification Features | | AirFlow m³/h | | |
|---|---|---|---|---|
| Input Voltage: | 240V AC | Speed | | |
| Motor: | 25W | 1 | 11,058 | |
| Type of Motor: | DC | 2 | 13,267 | |
| Blade Pitch: | 13° | 3 | 14,417 | |
| Blade Length: | 80" - 2030mm | 4 | 15,696 | |
| Construction: | ABS Polymer motor, canopy and blades | 5 | 16,529 | |
| Winter/Summer Function: | Yes | 6 | 17,438 | |
| IP Rating: | IPX0 | 7 | 17,615 | |
| Extension Rod Available: | Yes | 8 | 18,254 | |
| Remote Control: | Yes (9 Speed) | 9 | 22,318 | |
| **Optional Light Kit** | | | | |
| Luminaire (LED): | 18W | Lumen Output: | | |
| CCT: | 3000K - 4000K - 6000K | 3000K | 4000K | 6000K |
| Dimmable: | Yes | 1800lm | 1900lm | 1950lm |
| Luminaire Lifespan (hrs): | 10,000hrs | | | |

**Warranty:**

| | |
|---|---|
| Fan: | 3 Year In Home + 3 Year Parts Replacement |
| Receiver and remote: | 1 Year In Home + 1 Year Parts Replacement |


*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

## Axis 48

### 3 Blade 48" Ceiling Fan with no light

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function



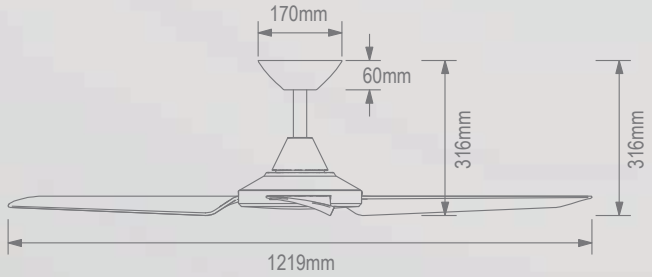


AXIS-48

| Item No. | Variants | | CCT | Wattage | Luminaire Wattage | Blade Pitch | Tropically Rated | Remote Control |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | | |
| AXIS-48 | 60020 | 60021 | TRIO | 26W | 18W | 14.5° | Yes | Yes |

*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*







## Axis 48 Light

### 3 Blade 48" Ceiling Fan with light

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function
LED CCT Switchable Light

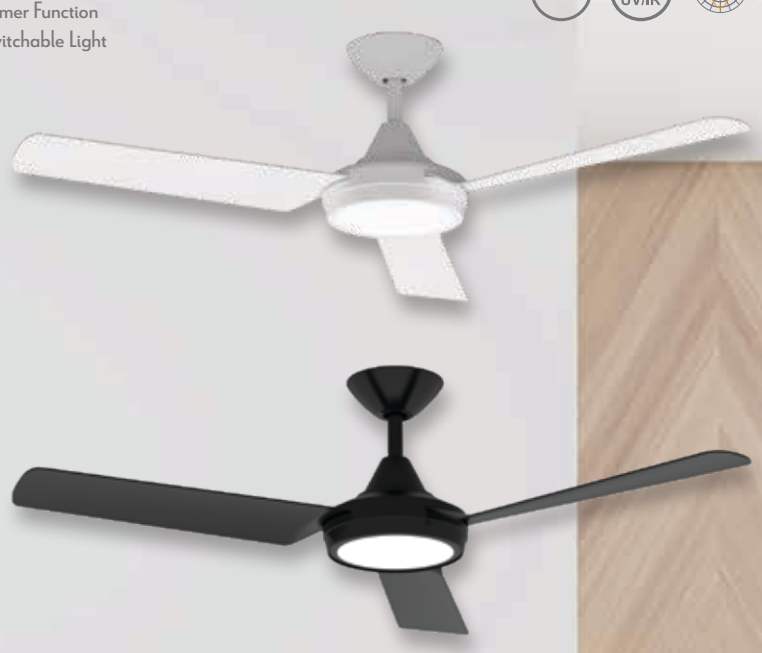

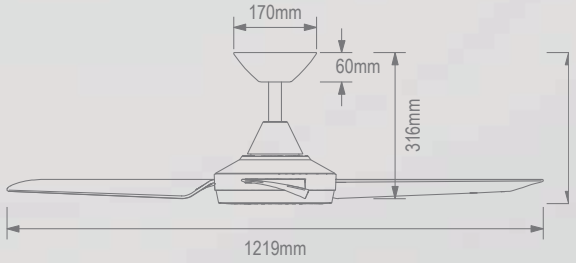


AXIS-48-L

| Item No. | Variants | | CCT | Wattage | Luminaire Wattage | Blade Pitch | Tropically Rated | Remote Control |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | | |
| AXIS-48-LIGHT | 60030 | 60031 | TRIO | 26W | 18W | 14.5° | Yes | Yes |

*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

## Motion 52

### 4 Blade 52" Ceiling Fan with no light

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function




AXIS-48

| Item No. | Variants | | CCT | Wattage | Luminaire Wattage | Blade Pitch | Tropically Rated | Remote Control |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | | |
| MOTION-52 | 60040 | 60041 | TRIO | 26W | 18W | 14.5° | Yes | Yes |

*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*









## Motion 52 Light

### 4 Blade 52" Ceiling Fan with light

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function
LED CCT Switchable Light




AXIS-48-L

| Item No. | Variants | | CCT | Wattage | Luminaire Wattage | Blade Pitch | Tropically Rated | Remote Control |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | | |
| MOTION-52-LIGHT | 60050 | 60051 | TRIO | 26W | 18W | 14.5° | Yes | Yes |


*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

# Hover 56

## 5 Blade 56" Ceiling Fan with no light

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function



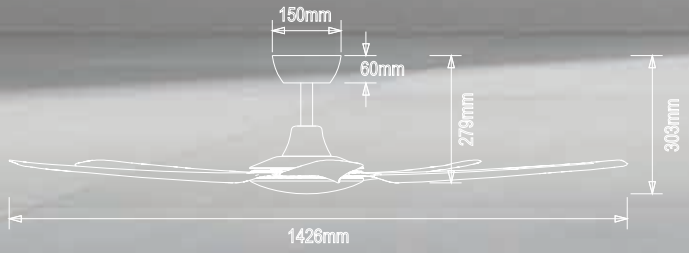


AXIS-48

| Item No. | Variants | | CCT | Wattage | Blade Pitch | Tropically Rated | Remote Control |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | |
| HOVER-56 | 60060 | 60061 | TRIO | 26W | 14.5° | Yes | Yes |

*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*





# Hover 56 Light

## 5 Blade 56" Ceiling Fan with light

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function
LED CCT Switchable Light






AXIS-48-L

| Item No. | Variants | | CCT | Wattage | Luminaire Wattage | Blade Pitch | Tropically Rated | Remote Control |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | | |
| HOVER-56-LIGHT | 60070 | 60071 | TRIO | 26W | 18W | 14.5° | Yes | Yes |

*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*

## Fresco 52
### 4 Blade 52" Outdoor
### IP66 Ceiling Fan with no light

Waterproof · Replacement 6yr Warranty · IP Rating 66 · Airflow 14,269 m³/h · Smart Fan Adaptable

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function




*AXIS-48*

| Item No. | Variants | | CCT | Wattage | Blade Pitch | IP Rating | Remote Control |
|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | |
| FRESCO-52 | 60080 | 60081 | TRIO | 26W | 14.5° | IP66 | Yes |

*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.* ***If 38° ceiling kit is used the fan will no longer be IP66.***







## Fresco 52 Light
### 4 Blade 52" Outdoor
### IP66 Ceiling Fan with light

Multi CCT Trio Technology 3 Colours in 1

Replacement 6yr Warranty · IP Rating 66 · Airflow 14,269 m³/h · Smart Fan Adaptable · Dimmable
Waterproof · energy saving LED · NO UV/IR · ies

DC Motor
ABS Polymer motor, canopy and blades
Winter/Summer Function
LED CCT Switchable Light





*AXIS-48-L*

| Item No. | Variants | | CCT | Wattage | Luminaire Wattage | Blade Pitch | IP Rating | Remote Control |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | | | |
| FRESCO-52-LIGHT | 60090 | 60091 | TRIO | 26W | 18W | 14.5° | IP66 | Yes |

*Accessories sold separately: Bluetooth Wall Control & Extension Rods.*
*Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.*
***If 38° ceiling kit is used the fan will no longer be IP66.***

## Universal 38 Degree Ceiling Mount Kit (Only for raked ceilings)



**Only for raked ceiling**
*(180mm diameter canopy)*

| Item No. | Variants | |
|---|---|---|
| | *Blk* | *Wht* |
| CFA-CK1 | 60115 | 60114 |

## Smart WIFI Module

WIFI Module smart chip accessory to adapt Ceiling Fan to become a Smart Fan. Complatible with Google Home and Alexa, using the TUYA Smart App.



*CFA-SWM*

| Item No. | Variant |
|---|---|
| CFA-SWM | 60124 |

## Wall Controller

- Compatible with all Domus DC Ceiling fans.
- 9 speed options.
- Timer function for fan and light (1,2,3,8 hours).
- Reverse function
- Light On/Off Settings
- Light Dimming
- Colour Changing Technology function (CCT).
- Displays ambient room temperature in Celsius.
- White and Blue LED back light.



*CFA-WC1*

| Item No. | Variant |
|---|---|
| CFA-WC1 | 60110 |







## Downrod 1




*Suits all models except for FRESCO Series*

## Downrod 2 (To suit FRESCO ceiling fans only)




| Item No. | Variants | |
|---|---|---|
| | *Blk* | *Wht* |
| CFA-DR1 | 60100 | 60101 |
| CFA-DR2* | 60105 | 60106 |

*All rods are 900mm long.*
**To suit Fresco Ceiling fans only.*




## Bolt Series

- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.


*BOLT-60*






*BOLT-120*






| Item No. | Variants | Wattage | IP Rating | CCT | Lumen Output Warm White 3000K | Neutral White 4000K | White 5700K |
|---|---|---|---|---|---|---|---|
| BOLT-60 | 66000 | 10W/12W 15W/17W/20W | 44 | TRIO | 810/1665lm | 900/1850lm | 900/1850lm |
| BOLT-120 | 66003 | 20W/25W 30W/36W/40W | 44 | TRIO | 1665/3420lm | 1850/3800lm | 1850/3800lm |






## Bolt Emergency Series

| | |
|---|---|
| Compliance: | Fully complaint to AS/NZS 2293 standards |
| Battery: | LiFePO4 battery type, 6.4V, 7 Hour Charging Time, 1.5 Hours Discharging Time |
| Battery Capacity: | 1500 mAh at 0.2 CmA |
| Emergency: | Sustained |
| Rated Duration: | 120 Min |
| Classification: | C0: D50, C90: D32 |

ESCAPE Emergency Systems


*BOLT-EM-60*







*BOLT-EM-120*






| Luminaire Classifications | | Maximum Spacings (M) Mounting Height (M) 2.1 | 2.4 | 2.7 | 3 | 3.3 | 3.6 | 4 | 4.5 | 5 | 6 | 7 | 8 | 9 | 10 | 15 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| C0-C180 | D50 | 18.0 | 18.7 | 19.4 | 20.1 | 20.7 | 21.2 | 21.8 | 22.5 | 23.2 | 24.2 | 24.9 | 25.4 | 25.7 | 25.9 | 23.7 |
| C90-C270 | D32 | 15.4 | 16.1 | 16.7 | 17.2 | 17.6 | 18.0 | 18.5 | 19.1 | 19.5 | 20.2 | 20.6 | 20.7 | 20.6 | 20.3 | 14.6 |

| Item No. | Variants | Wattage | IP Rating | CCT | Lumen Output Warm White 3000K | Neutral White 4000K | White 5700K |
|---|---|---|---|---|---|---|---|
| BOLT-60-EM | 66007 | 10W/12W 15W/17W/20W | 44 | TRIO | 900/1800lm | 1000/2000lm | 1000/2000lm |
| BOLT-120-EM | 66006 | 20W/25W 30W/36W/40W | 44 | TRIO | 900/3600lm | 1000/4000lm | 1000/4000lm |

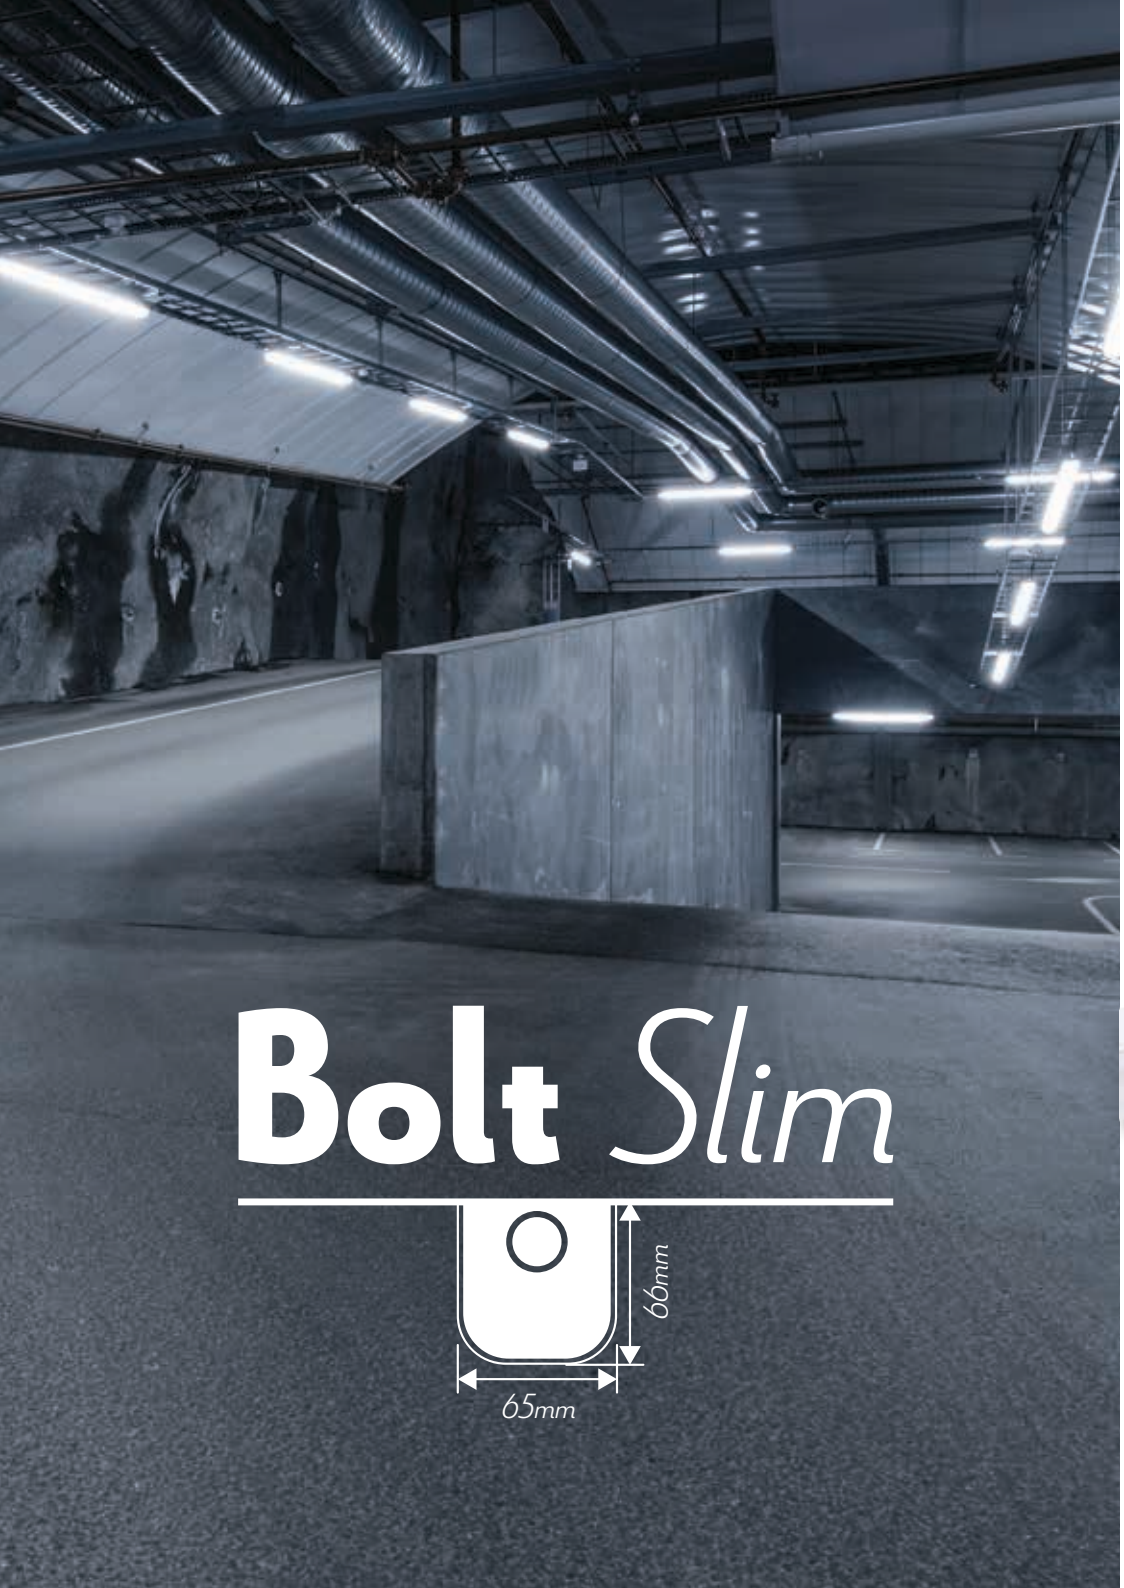




## Bolt Slim Series

- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.

*BOLT-SLIM-60*




*BOLT-ISLIM-20*




| Item No. | Variants | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|
| | | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| BOLT-SIM-60 | 66000 | 10W/13W/16W/20W | 44 | TRIO | 1450/2700lm | 1530/2900lm | 1520/2790lm |
| BOLT-SLIM-120 | 66003 | 25W/25W/35W/40W | 44 | TRIO | 2870/5445lm | 3020/5830lm | 3015/5625lm |

## Hydro Weatherproof Series

- 130lm/W High Efficiency LED PCB.
- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.
- DALI options available.
- Available in ON/OFF and DIM Sensor options.

| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Non-Dim | On/Off Sensor* | Dim Sensor* | | | | Warm White 3000K | Neutral White 4000K | White 5500K |
| HYDRO-60 | 66012 | 66028 | 66029 | 7.5/15W | 65 | TRIO | 980/1850lm | 980/1900lm | 950/1850lm |
| HYDRO-120 | 66017 | 66025 | 66026 | 15/30W | 65 | TRIO | 2350/4050lm | 2400/4250lm | 2400/4150lm |
| SENSOR-INT-01-REM | 66090 | 66091 | | | | | | | |

## Hydro Emergency Weatherproof Series

Compliance: Fully complaint to AS/NZS 2293 standards
Battery: LiFePO4 battery type, 6.4V, 7 Hour Charging Time, 1.5 Hours Discharging Time
Battery Capacity: 1500 mAh at 0.2 CmA
Emergency: Sustained
Rated Duration: 120 Min
Classification: C0: D50, C90: D32
DALI options available.
ON/OFF and DIM Sensor options available.


ESCAPE Emergency Systems

| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Non-Dim | On/Off Sensor* | Dim Sensor* | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| HYDRO-60-EM | 66020 | 66030 | 66031 | 7.5/15W | 65 | TRIO | 950/1850lm | 980/1900lm | 950/1850lm |
| HYDRO-120-EM | 66021 | 66022 | 66023 | 15/30W | 65 | TRIO | 2350/4050lm | 2400/4250lm | 2400/4150lm |
| SENSOR-INT-01-REM | | 66090 | 66091 | | | | | | |










HYDRO-60




HYDRO-120



*Internal ON/Off Sensor*
*Remote control (Sold separately)*



*Dimmable Sensor*
*Remote control (Sold separately)*

*Note: One remote control will operate unlimited sensors.*

## Park Series

- 130lm/W High Efficiency LED PCB
- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.
- DALI options available.
- Available in ON/OFF and DIM Sensor options.

| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Non-Dim | On/Off Sensor* | Dim Sensor* | | | | Warm White 3000K | Neutral White 4000K | White 5500K |
| PARK-60-DIFF | 66050 | 66051 | 66052 | 7.5/15W | 20 | TRIO | 980/1950lm | 980/1950lm | 980/1950lm |
| PARK-120-DIFF | 66053 | 66054 | 66055 | 15/30W | 20 | TRIO | 1950/3900lm | 1950/3900lm | 1950/3900lm |
| PARK-60-WG | 66060 | 66061 | 66062 | 7.5/15W | 20 | TRIO | 980/1950lm | 980/1950lm | 980/1950lm |
| PARK-120-WG | 66063 | 66064 | 66065 | 15/30W | 20 | TRIO | 1950/3900lm | 1950/3900lm | 1950/3900lm |
| SENSOR-INT-01-REM | 66090 | 66091 | | | | | | | |

## Park Emergency Series

Compliance: Fully complaint to AS/NZS 2293 standards
Battery: LiFePO4 battery type, 6.4V, 7 Hour Charging Time, 1.5 Hours Discharging Time
Battery Capacity: 1500 mAh at 0.2 CmA
Emergency: Sustained
Rated Duration: 120 Min
Classification: C0: D50, C90: D32
DALI options available.
ON/OFF and DIM Sensor options available.

ESCAPE Emergency Systems


| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Non-Dim | On/Off Sensor* | Dim Sensor* | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| PARK-60-DIFF-EM | 66020 | 66030 | 66031 | 7.5/15W | 20 | TRIO | 950/1850lm | 980/1900lm | 950/1850lm |
| PARK-120-DIFF-EM | 66021 | 66022 | 66023 | 15/30W | 20 | TRIO | 2350/4050lm | 2400/4250lm | 2400/4150lm |
| PARK-60-WG-EM | 66080 | 66081 | 66082 | 7.5/15W | 20 | TRIO | 950/1850lm | 980/1900lm | 950/1850lm |
| PARK-120-WG-EM | 66083 | 66084 | 66085 | 15/30W | 20 | TRIO | 2350/4050lm | 2400/4250lm | 2400/4150lm |
| SENSOR-INT-01-REM | 66090 | 66091 | | | | | | | |










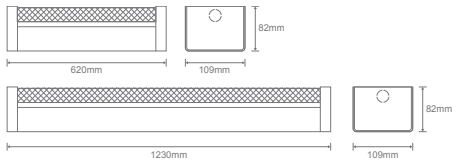


PARK-DIFF

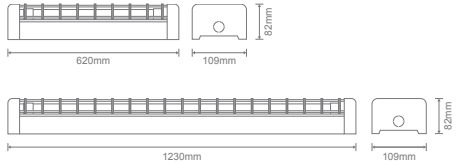


PARK-WG



*Internal ON/Off Sensor*
*Remote control (Sold separately)*



*Dimmable Sensor*
*Remote control (Sold separately)*

*Note: One remote control will operate unlimited sensors.*

# LED Battens

## Impact Series

- Dual wattage option.
- Inbuilt LED driver included.
- Replaceable LED module.
- Aluminium powder coated housing.
- Polycarbonate opal diffuser.
- Vandal proof.
- Ideal for railway and bus terminals, factories and tunnels.
- IK10 Rating.
- Comes complete with cable glands.



*IMPACT-60* *IMPACT-120*







| Item No. | Variants | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|
| | | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| IMPACT-60 | 66115 | 10/20W | 66 | TRIO | 2200lm | 2400lm | 2240lm |
| IMPACT-120 | 66116 | 20/40W | 66 | TRIO | 4800lm | 5000lm | 5000lm |



*Waterproof Gland*

## Shadow Series



*SHADOW-1LT*
*Polished Copper*



*Stainless Steel*



LED Wall Lights

Exterior




*Titanium Silver*




*Black*




*White*



*Aluminium models*



*Stainless Steel & Copper models*

| Item No. | Variant | | | | | Wattage | IP Rating | Lamp |
|---|---|---|---|---|---|---|---|---|
| | Blk | Cop | Tsl | Sts | Wht | | | |
| SHADOW-1-WB | 49016 | 49019 | 49018 | 49020 | 49017 | 6W | 65 | GU10 TRIO |

*Replacement Globe*

| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Warm White 3000K | Neutral White 4000K | White 6500K | |
| KEY-GU10-TRIO | 65112 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |

## Shadow Series



*SHADOW-2LT*
*Polished Copper*



*Stainless Steel*





LED Wall Lights




*Titanium Silver*



*Black*



*White*

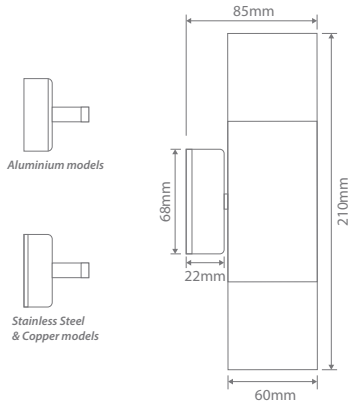


| Item No. | Variant | | | | | Wattage | IP Rating | Lamp |
|---|---|---|---|---|---|---|---|---|
| | Blk | Cop | Tsl | Sts | Wht | | | |
| SHADOW-2-WB | 49026 | 49029 | 49028 | 49030 | 49027 | 2x6W | 65 | GU10 TRIO |


### *Replacement Globe*

| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Warm White 3000K | Neutral White 4000K | White 6500K | |
| KEY-GU10-TRIO | 65112 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |

Exterior

## Shadow Series

IP Rating 65 | Replacement 2yr Warranty

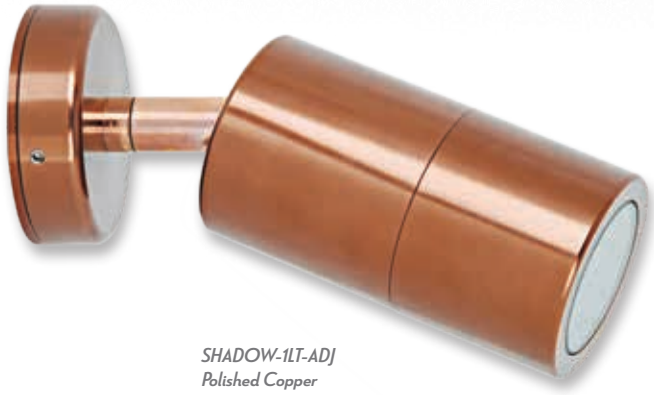

SHADOW-1LT-ADJ
Polished Copper




Stainless Steel





Titanium Silver | Black | White

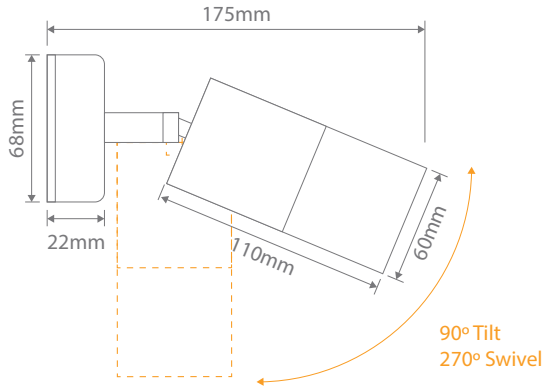




Aluminium models | Stainless Steel & Copper models

| Item No. | Variant | | | | | Wattage | IP Rating | Lamp |
|---|---|---|---|---|---|---|---|---|
| | Blk | Cop | Tsl | Sts | Wht | | | |
| SHADOW-1-ADJ | 49046 | 49049 | 49048 | 49050 | 49047 | 6W | 65 | GU10 TRIO |

*Replacement Globe*

| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Warm White 3000K | Neutral White 4000K | White 6500K | |
| KEY-GU10-TRIO | 65112 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |

## Shadow Series

IP Rating 65 | Replacement 2yr Warranty



*SHADOW-2LT-ADJ*
*Polished Copper*





*Stainless Steel*





*Titanium Silver* *Black* *White*

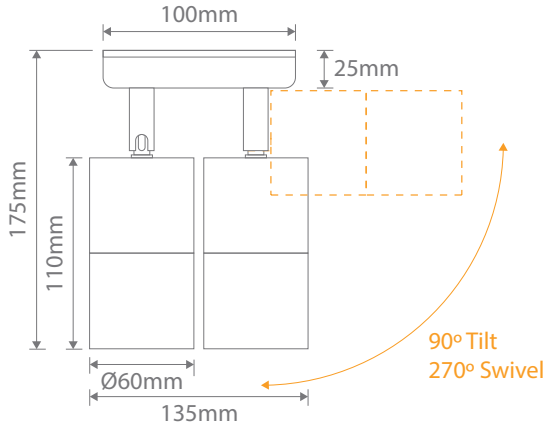

*Aluminium models*

*Stainless Steel & Copper models*

| Item No. | Variant | | | | | Wattage | IP Rating | Lamp |
|---|---|---|---|---|---|---|---|---|
| | Blk | Cop | Tsl | Sts | Wht | | | |
| SHADOW-2-ADJ | 49056 | 49059 | 49058 | 49060 | 49057 | 2x6W | 65 | GU10 TRIO |

*Replacement Globe*


| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Warm White 3000K | Neutral White 4000K | White 6500K | |
| KEY-GU10-TRIO | 65112 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |

## Finn-8 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.



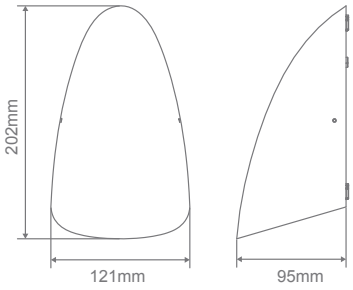


| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| FINN-8 | 22655 | 22656 | 22657 | 8W | 65 | TRIO | 650lm | 680lm | 700lm |








## Zelda-18 Series

- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.



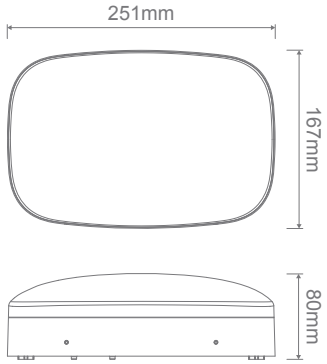




| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| ZELDA-18 | 22668 | 22669 | 18W | 65 | TRIO | 1600lm | 1730lm | 1850lm |

## Halo Series

- Aluminium fascia, polycarbonate backplate.
- Inbuilt LED driver included.
- Fully dimmable with suitable dimmers.





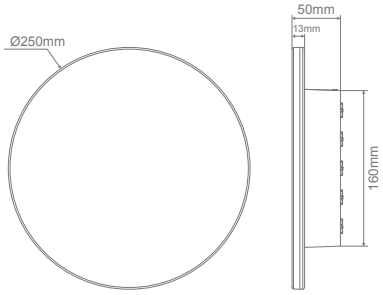
| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| HALO-8 | 22681 | 22682 | 8 | 65 | TRIO | 510lm | 565lm | 640lm |
| HALO-15 | 22683 | 22684 | 16W | 65 | TRIO | 1000lm | 1130lm | 1260lm |







## Livi Series


- Polycarbonate body.
- Inbuilt LED driver included.




*LIVI-5-BLK*



*LIVI-8-WHT*

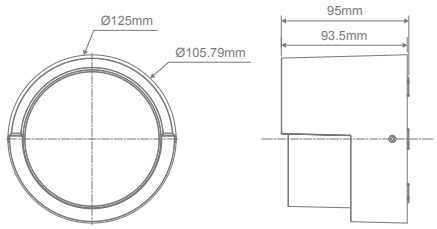


*LIVI-5*

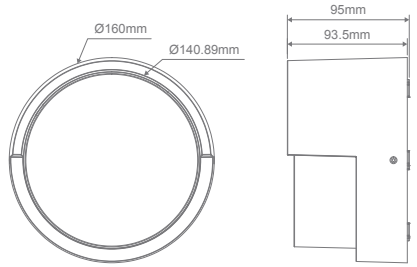



*LIVI-8*


| Item No. | Variants | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| LIVI-5 | 22689 | 22690 | 22691 | 5W | 65 | TRIO | 340lm | 365lm | 390lm |
| LIVI-8 | 22692 | 22693 | 22694 | 8W | 65 | TRIO | 580lm | 600lm | 615lm |

## Miley 10 Series

- Choose to use with or without optional diffuser.



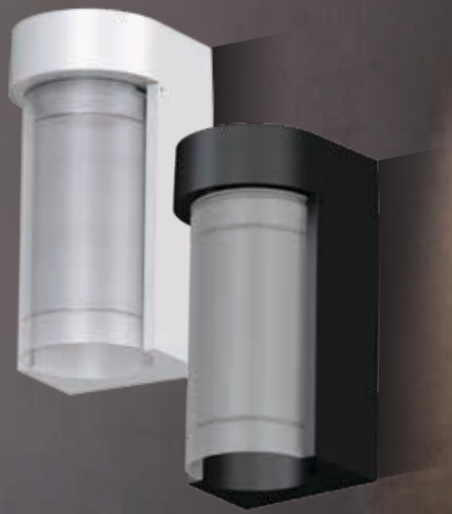




*The use of the diffuser is optional (Included)*

| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| MILEY-10 | 22664 | 22665 | 10W | 65 | TRIO | 350lm | 375lm | 400lm |









## Alpha Series

- Anodised Aluminium.
- Also available in powder coat black or white.








*ALPHA-SM*



*ALPHA-2-WB*








| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Alu | Wht | | | | 3000K | 4000K | 6500K |
| ALPHA-1-WB | 19128 | 19130 | 19129 | 1x6W | 54 | TRIO | 500lm | 550lm | 550lm |
| | 19388 | 19396 | 19391 | | | No Lamp | N/A | | |
| ALPHA-2-WB | 19131 | 19133 | 19132 | 2x6W | 54 | TRIO | 2x500lm | 2x550lm | 2x550lm |
| | 19794 | 19397 | 19797 | | | No Lamp | N/A | | |
| ALPHA-SM | 19134 | 19137 | 19136 | 1x6W | 54 | TRIO | 500lm | 550lm | 550lm |
| | 19808 | 19415 | 19811 | | | No Lamp | N/A | | |

## Piper 1 Series

- Complete with LED 10W PAR-30-TRIO lamp.
- Cast Aluminium, powder coated.

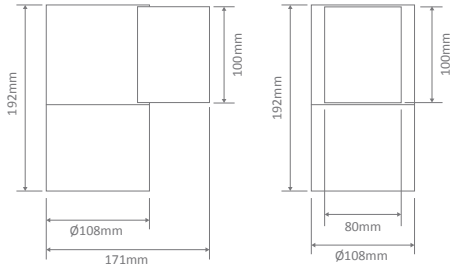




| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | 3000K | 4000K | 5000K |
| PIPER-PRO-1-RND | 49303 | 49304 | 1x10W | 65 | TRIO | 900lm | 1000lm | 950lm |




LED Wall Lights

Exterior

## Piper 1 Series

- Complete with LED 10W PAR-30-TRIO lamp.
- Cast Aluminium, powder coated.



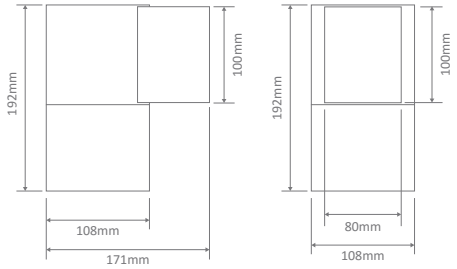



| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | 3000K | 4000K | 5000K |
| PIPER-PRO-1-SQR | 49300 | 49301 | 1x10W | 65 | TRIO | 900lm | 1000lm | 950lm |

## Piper 2 Series

- Complete with LED 10W PAR-30-TRIO lamps.
- Cast Aluminium, powder coated.



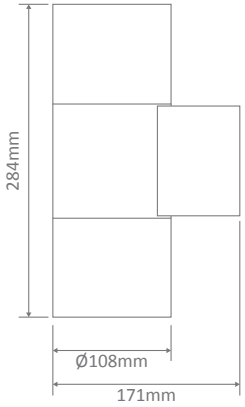


| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | 3000K | 4000K | 5000K |
| PIPER-PRO-2-RND | 49309 | 49310 | 2x10W | 65 | TRIO | 1800lm | 2000lm | 1900lm |




LED Wall Lights

Exterior

## Piper 2 Series

- Complete with LED 10W PAR-30-TRIO lamps.
- Cast Aluminium, powder coated.



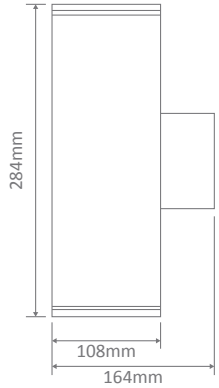



| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | 3000K | 4000K | 5000K |
| PIPER-PRO-2-SQR | 49306 | 49307 | 2x10W | 65 | TRIO | 1800lm | 2000lm | 1900lm |

## Whisper Series

- Tempered Opal Glass, cast Aluminium backing.
- Inbuilt LED driver included.





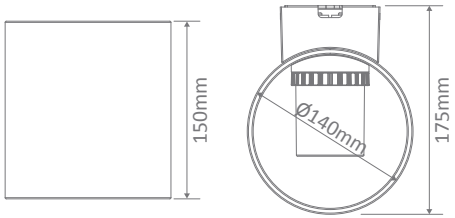


| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|
| | Blk | Wht | | | | |
| WHISPER-6 | 19680 | 19678 | 10.5W | 65 | 3000K | 290lm |
| | 19681 | 19679 | | | 5000K | 340lm |



*WHISPER-6*

## Dash Series

- Tempered Opal Glass, cast Aluminium backing.
- Inbuilt LED driver included.
- Available as Up/Down or Down only Luminaire.



DASH-8-13-BLK




DASH-8-13-DGR



DASH-8-13-WHT



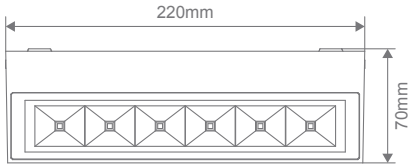


| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | |
| DASH-8 | 19900 | 19902 | 19904 | 8W | 65 | 3000K | 600lm |
| | 19901 | 19903 | 19905 | | | 5000K | 620lm |
| DASH-13 | 19942 | 19944 | 19946 | 13W | 65 | 3000K | 6100lm |
| | 19943 | 19945 | 19947 | | | 5000K | 1050lm |



DASH-8-WHT-3K

## Sierra Series





- Cast Aluminium, powder coated.
- Adjustable integrated light angle slides.
- Inbuilt LED driver included.




SIERRA-12-RND



SIERRA-12-SQR




| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | |
| SIERRA-12-RND | 19634 | 19630 | 19632 | 12W | 65 | 3000K | 400lm |
| | 19635 | 19631 | 19633 | | | 5000K | 450lm |
| SIERRA-12-SQR | 19640 | 19636 | 19638 | 12W | 65 | 3000K | 400lm |
| | 19641 | 19637 | 19639 | | | 5000K | 450lm |



*Adjustable Integrated Slides*

## Bell Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.




BELL-8




BELL-13










| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | |
| BELL-8 | 19370 | 19372 | 19374 | 8W | 65 | 3000K | 300lm |
| | 19371 | 19373 | 19375 | | | 5000K | 350lm |
| BELL-13 | 19376 | 19378 | 19380 | 13W | 65 | 3000K | 500lm |
| | 19377 | 19379 | 19381 | | | 5000K | 550lm |



BELL-8-DGR

## Block Series


- Cast Aluminium, powder coated.
- Anti-glare internal reflector.
- Inbuilt LED driver included.




BLOCK-6



BLOCK-12




| Item No. | Variant | | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | |
| BLOCK-6 | 19544 | 19546 | 19570 | 19572 | 2x3W | 65 | 3000K | 500lm |
| | 19545 | 19547 | 19571 | 19573 | | | 5000K | 550lm |
| BLOCK-12 | 19548 | 19562 | 19576 | 19578 | 2x6W | 65 | 3000K | 950lm |
| | 19549 | 19563 | 19577 | 19579 | | | 5000K | 1100lm |







## Edge Series


- Cast Aluminium, powder coated.
- Inbuilt LED driver included.




EDGE-4



EDGE-8




| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | |
| EDGE-4 | 19692 | 19694 | 19696 | 4W | 65 | 3000K | 150lm |
| | 19693 | 19695 | 19697 | | | 5000K | 180lm |
| EDGE-8 | 19684 | 19686 | 19688 | 8W | 65 | 3000K | 300lm |
| | 19685 | 19687 | 19689 | | | 5000K | 350lm |

## Dent Series

- Cast Aluminium, powder coated.




Black

White




Black

White














| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | 3000K | 4000K | 5000K |
| DENT-I | 19008 | 19009 | 6W | 54 | TRIO | 500lm | 550lm | 600lm |
| DENT-II | 19011 | 19012 | 2x6W | 54 | TRIO | 810lm | 860lm | 910lm |



DENT-II-WHT

## Kira Series

- Adjustable lens function, from a narrow 15° beam to a wide 60° beam angle.
- Tilt adjustable head in a Black, Dark Grey or White powder coated frame.

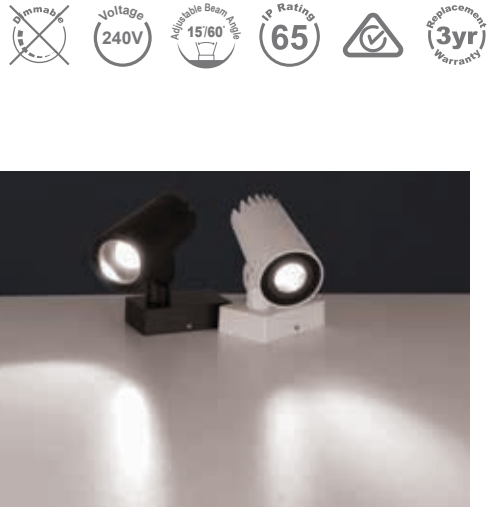



*60° to 15° Beam Angle Variation*










| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | |
| KIRA-11-ADJ | 20264 | 20268 | 20266 | 11W | 65 | 3000K | 450lm |
| | 20265 | 20269 | 20267 | | | 5000K | 470lm |





## Casa Series


- Featuring a Black, White or Dark Grey powder coated Aluminium frame with an opal diffuser or clear diffuser with internal louvres.




*CASA*



*CASA-LOUVRE*

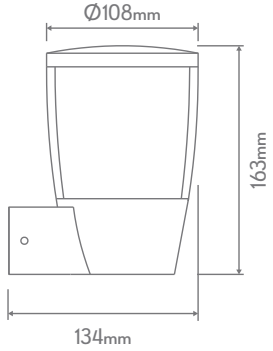

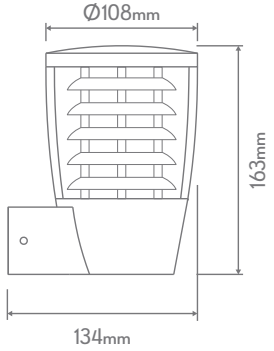



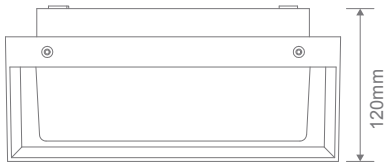

| Item No. | Variant | | | Wattage | IP Rating | Lamp Base | Requires |
|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | |
| CASA | 10713 | 10717 | 10716 | 25W LED Max | 54 | E27 | 1xE27 Globe (Not Included) |
| CASA-LOUVRE | 10747 | 10751 | 10750 | | | | |

## Claro Series

- Black or Dark Grey powder coated Aluminium frame



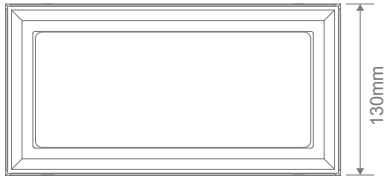


| Item No. | Variant | | Wattage | IP Rating | Lamp Base | Requires |
|---|---|---|---|---|---|---|
| | Blk | Dgr | | | | |
| CLARO | 19890 | 19891 | 25W LED Max | 65 | E27 | 1xE27 Globe (Not Included) |









## Como Series

- Black or Dark Grey powder coated Aluminium frame, with an opal glass enclosure to the LED module behind.



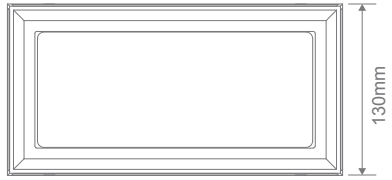

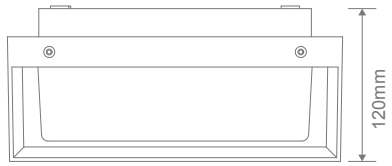
| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|
| | Blk | Dgr | | | | |
| COMO-6 | 19882 | 19884 | 6W | 65 | 3000K | 420lm |
| | 19883 | 19885 | | | 5000K | 440lm |

## York Series

- Cast Aluminium, powder coated, opal glass diffuser.
- Inbuilt LED driver included.




YORK-12-BLK




YORK-7



YORK-12




| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | |
| YORK-7 | 19648 | 19644 | 19646 | 7W | 65 | 3000K | 350lm |
| | 19649 | 19645 | 19647 | | | 5000K | 400lm |
| YORK-12 | 19654 | 19650 | 19652 | 12W | 65 | 3000K | 800lm |
| | 19655 | 19651 | 19653 | | | 5000K | 850lm |


## Zone Series

Dimmable · Voltage 240V · IP Rating 65 · Replacement 3yr Warranty

- Injection moulded polycarbonate body.
- Inbuilt LED driver included.
- Clear and frosted tempered glass fascia.




ZONE-2




Cutout: Ø68mm




ZONE-4




Cutout: 114mm x 68mm



ZONE-5




Cutout: 160mm x 68mm

| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|
| ZONE-2 | 19720 | 2W | 65 | 3000K | 70lm |
| | 19721 | | | 5000K | 80lm |
| ZONE-4 | 19722 | 4W | 65 | 3000K | 160lm |
| | 19723 | | | 5000K | 180lm |
| ZONE-5 | 19724 | 5W | 65 | 3000K | 280lm |
| | 19725 | | | 5000K | 320lm |



ZONE-4

## Zac Series


- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Comes c/w mounting box.




ZAC-4-RND



ZAC-4-SQR




Cutout without recessed box: (Ø) 100mm
Cutout with recessed box: (Ø) 110mm




Cutout without recessed box: (Ø) 100mm
Cutout with recessed box: (L) 110mm x (H) 110mm

### 240V

| Item No. | Variant | | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | |
| ZAC-4-RND | 19727 | 19729 | 19731 | 19733 | 4W | 65 | 3000K | 200lm |
| | 19728 | 19730 | 19732 | 19734 | | | 5000K | 250lm |
| ZAC-4-SQR | 19735 | 19737 | 19739 | 19741 | 4W | 65 | 3000K | 200lm |
| | 19736 | 19738 | 19740 | 19742 | | | 5000K | 250lm |

### 12V

| Item No. | Variant | | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | |
| ZAC-4-12V-RND | 19770 | 19772 | 19774 | 19776 | 4W | 65 | 3000K | 200lm |
| | 19771 | 19773 | 19775 | 19777 | | | 5000K | 250lm |
| ZAC-4-12V-SQR | 19778 | 19780 | 19782 | 19784 | 4W | 65 | 3000K | 200lm |
| | 19779 | 19781 | 19783 | 19785 | | | 5000K | 250lm |




ZAC-4-SQR-DGR

## Zac Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Comes c/w mounting box.



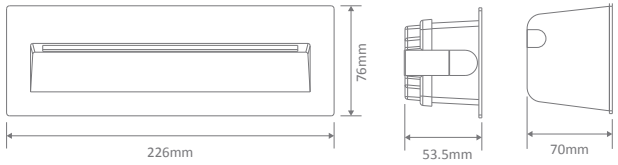



Cutout without recessed box: (L) 210mm x (H) 60mm
Cutout with recessed box: (L) 220mm x (H) 70mm

**240V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZAC-8 | 19760 | 19762 | 19764 | 19766 | 8W | 240V | 65 | 3000K | 300lm |
| | 19761 | 19763 | 19765 | 19767 | | | | 5000K | 350lm |

**12V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZAC-8-12V | 19786 | 19788 | 19790 | 19792 | 8W | 12V | 65 | 3000K | 300lm |
| | 19787 | 19789 | 19791 | 19793 | | | | 5000K | 350lm |

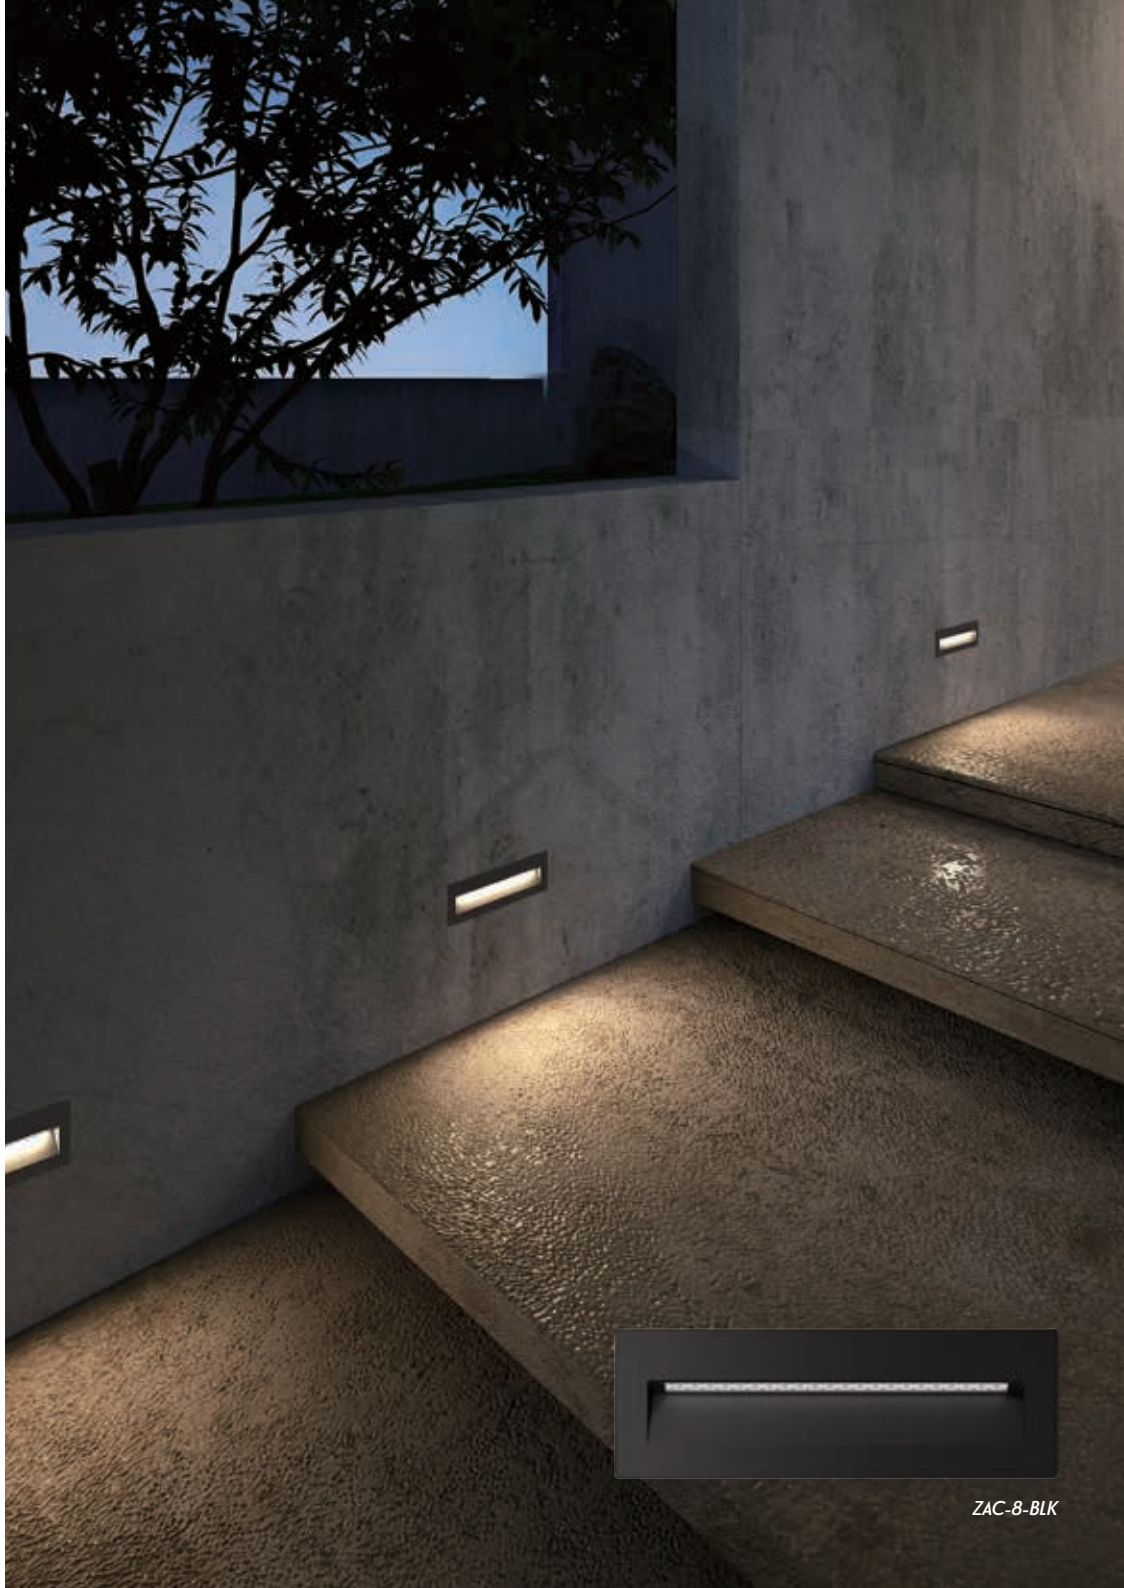

*ZAC-8-BLK*

## Zeke-9 Series


- Cast Aluminium, powder coated.
- Inbuilt LED driver included.




ZEKE-9-RND



ZEKE-9-SQR




**240V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZEKE-9-RND | 19514 | 19488 | 19486 | 19506 | 9W | 240V | 65 | 3000K | 800lm |
| | 19515 | 19489 | 19487 | 19507 | | | | 5000K | 900lm |
| ZEKE-9-SQR | 19516 | 19492 | 19490 | 19508 | 9W | 240V | 65 | 3000K | 800lm |
| | 19517 | 19493 | 19491 | 19509 | | | | 5000K | 900lm |

**12V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZEKE-9-12V-RND | 19870 | 19866 | 19864 | 19868 | 9W | 12V | 65 | 3000K | 800lm |
| | 19871 | 19867 | 19865 | 19869 | | | | 5000K | 900lm |
| ZEKE-9-12V-SQR | 19878 | 19874 | 19872 | 19876 | 9W | 12V | 65 | 3000K | 800lm |
| | 19879 | 19875 | 19873 | 19877 | | | | 5000K | 900lm |









## Zeke-4 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.

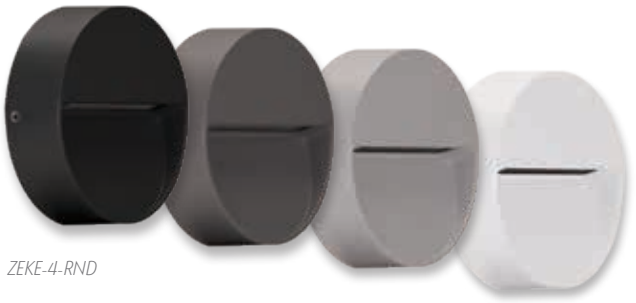


ZEKE-4-RND






ZEKE-4-SQR




**240V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZEKE-4-RND | 19526 | 19702 | 19700 | 19704 | 4W | 240V | 65 | 3000K | 300lm |
| | 19527 | 19703 | 19701 | 19705 | | | | 5000K | 350lm |
| ZEKE-4-SQR | 19528 | 19708 | 19706 | 19710 | 4W | 240V | 65 | 3000K | 300lm |
| | 19529 | 19709 | 19707 | 19711 | | | | 5000K | 350lm |


**12V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZEKE-4-12V-RND | 19846 | 19842 | 19840 | 19844 | 4W | 12V | 65 | 3000K | 300lm |
| | 19847 | 19843 | 19841 | 19845 | | | | 5000K | 350lm |
| ZEKE-4-12V-SQR | 19854 | 19850 | 19848 | 19852 | 4W | 12V | 65 | 3000K | 300lm |
| | 19855 | 19851 | 19849 | 19853 | | | | 5000K | 350lm |

## Zeke-8 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.






**240V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZEKE-8 | 19542 | 19714 | 19712 | 19716 | 8W | 240V | 65 | 3000K | 500lm |
| | 19543 | 19715 | 19713 | 19717 | | | | 5000K | 550lm |

**12V**

| Item No. | Variant | | | | Wattage | Voltage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | | |
| ZEKE-8-12V | 19862 | 19858 | 19856 | 19860 | 8W | 12V | 65 | 3000K | 500lm |
| | 19863 | 19859 | 19857 | 19861 | | | | 5000K | 550lm |







## You Series


- Cast Aluminium powder coated.
- Inbuilt LED driver included.




YOU-RND



YOU-SQR





Depth without recessed box: (D) 46mm
Cutout without recessed box: (Ø) 70mm

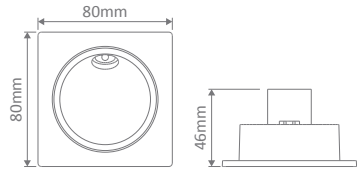


Depth without recessed box: (D) 46mm
Cutout without recessed box: (Ø) 70mm

### Recessed Box (Included)

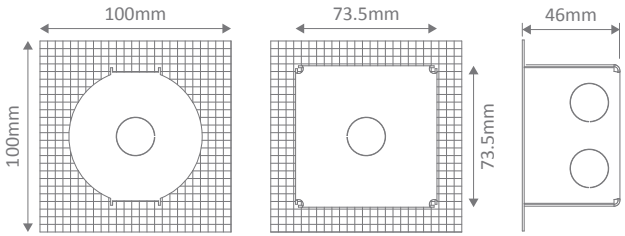


| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|
| | Blk | Wht | | | | |
| YOU-3-RND | 19989 | 19985 | 3W | 65 | 3000K | 200lm |
| | 19990 | 19986 | | | 5000K | 220lm |
| YOU-3-SQR | 19991 | 19987 | 3W | 65 | 3000K | 200lm |
| | 19992 | 19988 | | | 5000K | 220lm |


## Blaze-Pro Series

- Cast Aluminium, powder coated.
- Multi wattage selectable.
- Colour temperature switchable.
- Unique anti-condensation breathing valve.
- Sensor adapter interface (PIR & PECELL).
- Corner bracket and pluggable sensors available (sold separately).

*BLAZE-PRO-200*





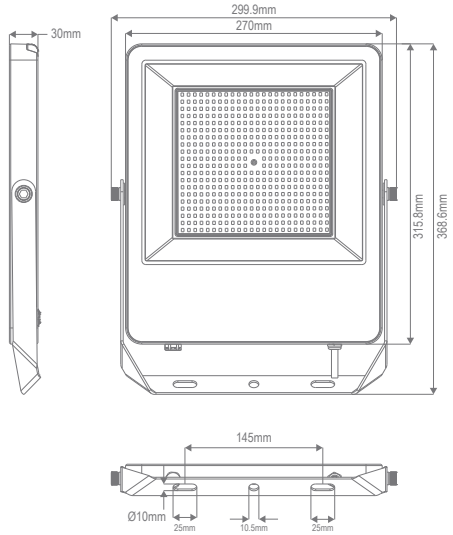


| Item No. | Variant Blk | Variant Wht | IP Rating | CCT | | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| BLAZE-PRO-200 | 19920 | 19921 | 66 | TRIO | 100W | 3000K 11840lm | 4000K 12780lm | 5500K 12720lm |
| | | | | | 150W | 3000K 17060lm | 4000K 18720lm | 5500K 18200lm |
| | | | | | 200W | 3000K 21970lm | 4000K 24380lm | 5500K 23470lm |








*BLAZE-PRO-100*




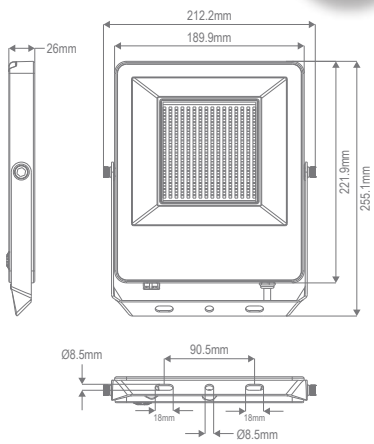


| Item No. | Variant Blk | Variant Wht | IP Rating | CCT | | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| BLAZE-PRO-100 | 19918 | 19919 | 66 | TRIO | 50W | 3000K 6040lm | 4000K 6510lm | 5500K 6450lm |
| | | | | | 70W | 3000K 8100lm | 4000K 8950lm | 5500K 8590lm |
| | | | | | 100W | 3000K 10750lm | 4000K 12150lm | 5500K 12150lm |

*BLAZE-PRO-50*



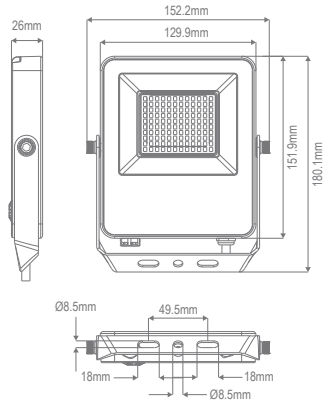


| Item No. | Variants Blk | Variants Wht | IP Rating | CCT | | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| BLAZE-PRO-50 | 19916 | 19917 | 66 | TRIO | 20W | 3000K 2250lm | 4000K 2360lm | 5500K 2380lm |
| | | | | | 30W | 3000K 3230lm | 4000K 3230lm | 5500K 3430lm |
| | | | | | 50W | 3000K 5060lm | 4000K 5060lm | 5500K 5360lm |

# Blaze-Pro Accessories

## Plug and Play PIR Sensor

A PIR (Passive Infrared) sensor, also known as a PIR motion sensor, is an electronic device used to detect the presence of humans or animals in its vicinity based on their emitted infrared radiation. PIR sensors are commonly used in security systems, automatic lighting systems, and various other applications that require motion detection. The optional sensor is a Plug-N-Play accessory that instantly converts the BLAZE-PRO floodlights into LED floodlights with sensor models.

## Plug and Play Daylight Sensor

The optional BLAZE-PRO-PECELL Sensor is a Plug-N-Play accessory that instantly converts the BLAZE-PRO floodlights into LED floodlights with Photoelectric Cell Sensor models. This Sensor will automatically detect low light levels and turn on at dusk (or pre-selected setting) and turn off at dawn (or pre-selected setting) when light levels increase.



*PIR Sensor Features (see Sensor Data Sheet)*

| | |
|---|---|
| Left/Right Adjustment: | 90° |
| Up/Down Adjustment: | 180° |
| Sensor Control: | ON/OFF |
| Time Delay Settings: | 1, 3, 6 & 12Min |
| Sensitivity Settings: | 25%, 50%, 75% & 100% |
| Sensitivity Distance: | 2-8M |
| IP Rating: | IP65 |

*PECELL Sensor Features (see Sensor Data Sheet)*

| | |
|---|---|
| Voltage and current: | 5V DC, 10mA |
| Lux Level: | 10Lux/20Lux/50Lux/100Lux |
| IP Rating: | IP65 |
| Operating Temperature: | -30°C - 40°C |
| Installation height: | ≤8M |
| Remote Control Distance: | 0-8M |

| Item No. | Variant |
|---|---|
| BLAZE-PRO-PIR | 19926 |
| BLAZE-PRO-PECELL | 19928 |











# Blaze-Pro Accessories

## Corner Mounting Bracket

360° Rotation




| Item No. | Variant |
|---|---|
| BLAZE-PRO-BKT | 19923 |

## Anti Condensation Valve

Also known as a condensation prevention valve or anti-sweat valve, is a device used to control or prevent condensation from forming on the surface of cold objects. It helps manage moisture buildup and reduce the potential for water damage, corrosion, or mould growth.

Release of Warm Air: Once the valve is open, it allows warm ambient air to flow into the area around the cold object. This warm air mixes with the cooler air in the vicinity of the surface, raising the temperature and preventing or reducing condensation.By mitigating condensation, anti-condensation valves help maintain the integrity and performance of equipment, minimise energy loss, reduce the risk of damage, and improve overall environmental conditions.



## Multi-Wattage & Tri-Colour Switchable

**Dip Switch Technology**

Top switch changes wattage


Bottom switch changes coloiur temperature



## Flash-20 Series

- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.






| Item No. | Variant | | | | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Slr | Wht | | | | |
| FLASH-20 | 19620 | 19564 | 19584 | 19586 | 20W | 65 | 3000K | 2000lm |
| | 19621 | 19565 | 19585 | 19587 | | | 5000K | 2200lm |








## Elite Adjustable

- Anodised Aluminium.
- Adjustable and Directional.






| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|
| | Alu | | | | |
| ELITE-1-ADJ | 19408 | 6W | 54 | 3000K | 450lm |
| | 19409 | | | 5000K | 500lm |
| | 19416 | | | No Lamp | N/A |

## Muro-Eco Series


- COB LED chip.
- Polycarbonate construction.
- Slimline sensor.
- Double Insulated
- Class II (No Earth Required)




MURO-ECO-10(S)-BLK



MURO-ECO-20(S)-WHT

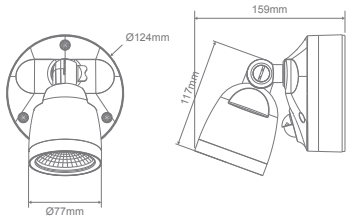

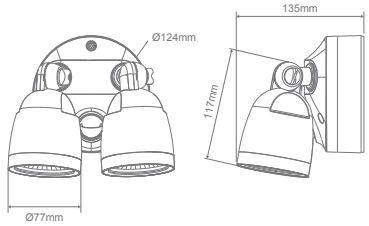
- Auxiliary terminal providing functionality for additional lights to be activated external from the spotlights (up to 250w load).
- Multiple sensor Muro-Eco fittings can be wired in parallel via auxiliary terminal.
- Built in manual override via a switching function process OR can be wired to a 3-position switch for manual operation.

| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| MURO-ECO-10 | 25070 | 20571 | 10W | 65 | TRIO | 1000lm | 1050lm | 1000lm |
| MURO-ECO-10S | 25072 | 25073 | | | | | | |
| MURO-ECO-20 | 25074 | 25075 | 2x10W | 65 | TRIO | 2000lm | 2100lm | 2000lm |
| MURO-ECO-20S | 25076 | 25077 | | | | | | |







## Muro-Max Series


- COB LED chip.
- Die-cast aluminium.
- Slimline sensor.




MURO-MAX-16(S)-BLK



MURO-MAX-32(S)-WHT

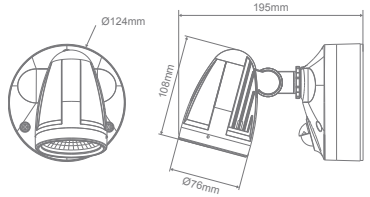

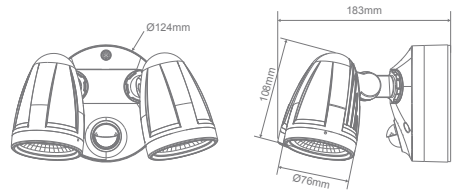
- Auxiliary terminal providing functionality for additional lights to be activated external from the spotlights (up to 250w load).
- Multiple sensor Muro-Eco fittings can be wired in parallel via auxiliary terminal.
- Built in manual override via a switching function process OR can be wired to a 3-position switch for manual operation.

| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| MURO-MAX-16 | 25080 | 25081 | 16W | 65 | TRIO | 1700lm | 1800lm | 1600lm |
| MURO-MAX-16S | 25082 | 25083 | | | | | | |
| MURO-MAX-32 | 25084 | 25085 | 2x16W | 65 | TRIO | 3200lm | 3600lm | 3300lm |
| MURO-MAX-32S | 25086 | 25087 | | | | | | |

## Muro-Pro Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.






MURO-PRO-15



MURO-PRO-30



Dark Grey



Black



White



Black

| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| MURO-PRO-15 | 25053 | 25054 | 25055 | 15W | 54 | TRIO | 950lm | 1050lm | 1000lm |
| MURO-PRO-30 | 25059 | 25060 | 25061 | 2x15W | 54 | TRIO | 1900lm | 2100lm | 2000lm |





## Muro-Pro Series

- COB LED chip.
- Cast Aluminium, powder coated.
- Inbuilt LED driver included.
- Adjustable and Directional.
- PIR detection sensor (Passive Infrared Sensor)






MURO-PRO-15S



MURO-PRO-30S



White



Dark Grey



Dark Grey



Black


| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Dgr | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| MURO-PRO-15S | 25056 | 25057 | 25058 | 15W | 44 | TRIO | 950lm | 1050lm | 1000lm |
| MURO-PRO-30S | 25062 | 25063 | 25064 | 2x15W | 44 | TRIO | 1900lm | 2100lm | 2000lm |

## Elite Spike

- Adjustable and Directional.
- Available in Black and Anodised Aluminium.



ELITE-SPIKE-BLK ELITE-SPIKE-ALU

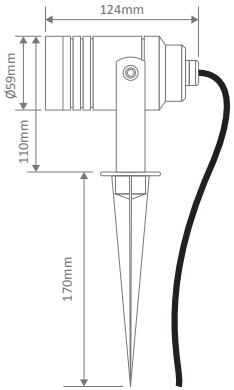




*Water STOP Cable Joint*

| Item No. | Variant | | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Sts | Alu | | | | 3000K | 4000K | 6500K |
| ELITE-SPIKE | 19148 | N/A | 19147 | 6W | 54 | MR16 TRIO | 500lm | 550lm | 550lm |
| | 19666 | N/A | 19499 | | | No Lamp | N/A | | |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*








## Kira Spike

- Adjustable lens function
- Tilt adjustable head
- Black powder coated frame





*Water STOP Cable Joint*

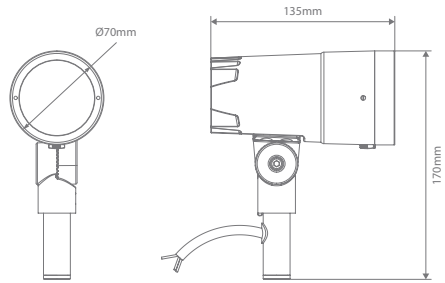


| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|
| KIRA-6 | 20262 | 6W | 65 | 3000K | 300lm |
| | 20263 | | | 5000K | 310lm |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*



Multi CCT Trio Technology 3 Colours in 1

## Zoom Pro Series

- COB LED chip.
- Hood included.
- Adjustable and Directional.
- 12V/24V DC Input


Dimmable | 12/24 VDC | 40° Beam Angle | 30° Beam Angle | IP Rating 65 | Replacement 3yr Warranty

5-12W 30W

ZOOM-PRO-5W









ZOOM-PRO-12W









ZOOM-PRO-30W










*Water STOP Cable Joint*

| Item No. | Variants | Wattage | IP Rating | CCT | Lumen Output 3000K | 4000K | 5000K |
|---|---|---|---|---|---|---|---|
| ZOOM-PRO-5 | 25702 | 5W | 65 | TRIO | 320lm | 360lm | 360lm |
| ZOOM-PRO-12 | 25706 | 12W | 65 | TRIO | 870lm | 980lm | 930lm |
| ZOOM-PRO-30 | 25709 | 30W | 65 | TRIO | 1930lm | 2070lm | 2010lm |


*Requires: 12/24V DC Constant Voltage LED Driver - Wire in Parallel*



*Tree Bracket (5W only)* *Variant: 25713*

## Shadow Spike Series



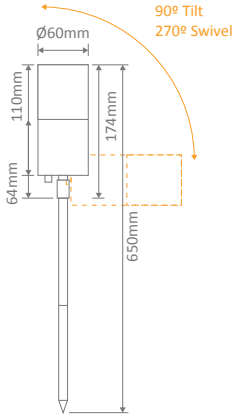




*Water STOP Cable Joint*

| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Sts | | | | 3000K | 4000K | 6500K |
| SHADOW-1-GDN | 49073 | 49074 | 6W | 65 | MR16 TRIO | 500lm | 550lm | 550lm |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*

*Replacement Globe*

| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Warm White 3000K | Neutral White 4000K | White 6500K | |
| KEY-MR16-TRIO | 65122 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |








## Shadow Path Series




*SHADOW-1LT-PATH-SPIKE-BLK*

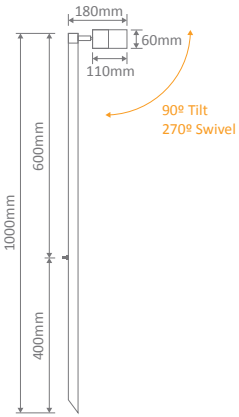





*Water STOP Cable Joint*

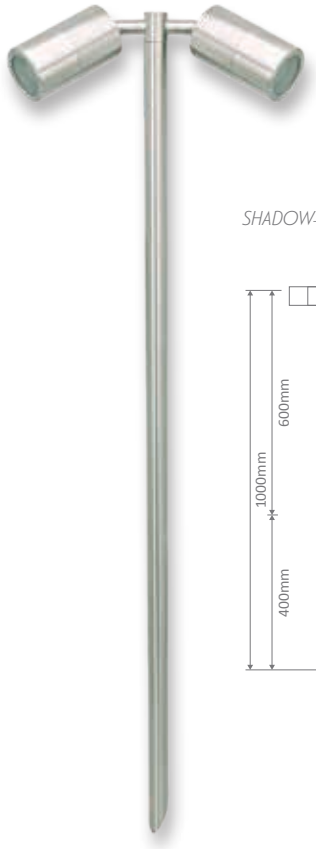

*SHADOW-2LT-PATH-SPIKE-STS*

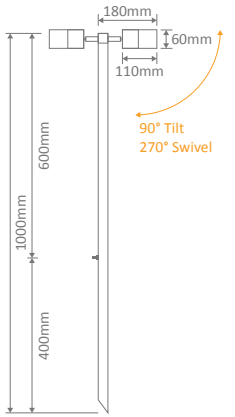


| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Sts | | | | 3000K | 4000K | 6500K |
| SHADOW-1-PTH | 49083 | 49084 | 6W | 65 | MR16 TRIO | 500lm | 550lm | 550lm |
| SHADOW-2-PTH | 49088 | 49089 | 6W | 65 | MR16 TRIO | 500lm | 550lm | 550lm |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*

*Replacement Globe*

| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Warm White 3000K | Neutral White 4000K | White 6500K | |
| KEY-MR16-TRIO | 65122 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |


## Dusk Path Series

- Complete with 4W LED G5.3 Bi-Pin Tri-Colour Lamp.
- Solid brass construction, designed for coastal areas.
- Available in durable black powder-coated Onyx finish.
- Available in Bronze (Weathered Brass).
- CRI 90
- Complete with 2 metre cable.





*Water STOP Cable Joint*

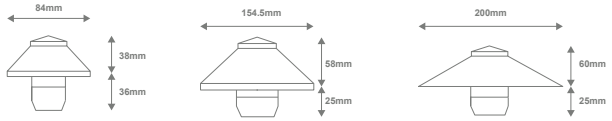


| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Brz | | | | 3000K | 4000K | 5000K |
| DUSK-PATH-450-S | 19108 | 19100 | 4W | 65 | TRIO | 330lm | 350lm | 330lm |
| DUSK-PATH-450-M | 19109 | 19101 | | | | | | |
| DUSK-PATH-450-L | 19110 | 19102 | | | | | | |
| DUSK-PATH-610-S | 19112 | 19104 | 4W | 65 | TRIO | 330lm | 350lm | 330lm |
| DUSK-PATH-610-M | 19113 | 19105 | | | | | | |
| DUSK-PATH-610-L | 19114 | 19106 | | | | | | |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*

*Replacement Globe*

KEY-G5.3-TRIO **65124**





## Dusk Stick Series

- Complete with 4W LED G5.3 Bi-Pin Tri-Colour Lamp.
- Aluminium construction (Black Finish).
- Solid brass construction (Bronze Finish), designed for coastal areas.
- Available in durable black powder-coated Onyx finish.
- Available in Bronze (Weathered Brass).
- CRI 90.
- Complete with 2 metre cable.






*Water STOP Cable Joint*

| Item No. | Variant | | Wattage | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Brz | | | | 3000K | 4000K | 5000K |
| DUSK-STICK | 19123 | 19122 | 4W | 54 | TRIO | 330lm | 350lm | 330lm |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*


*Replacement Globe*

KEY-G5.3-TRIO **65124**

## Dusk Spike MR11

- Complete with 3W LED MR11 12V DC 3000K Lamp.
- Solid brass construction, designed for coastal areas.
- Available in durable black powder-coated Onyx finish.
- Available in Bronze (Weathered Brass).
- Complete with 2 metre cable.








*Water STOP Cable Joint*

| Item No. | Variant | | Wattage | Beam Angle | IP Rating | CCT | Lumen Output | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Brz | | | | | 3000K | 6000K |
| DUSK-SPIKE-MR11 | 19120 | 19119 | 3W | 38° | 65 | 3000K | 240lm | 240lm |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*

*Replacement Globe*

| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | Lifetime |
|---|---|---|---|---|---|---|---|
| KEY-MR11-3 | 65016 | 3W | 38° | 3000K | ≥80 | 240lm | 15,000hrs |
| | 65017 | | | 6000K | | | |








## Dusk Spike MR16

- Complete with 6W LED MR16 12V DC Tri-Colour Lamp.
- Solid brass construction, designed for coastal areas.
- Available in durable black powder-coated Onyx finish.
- Available in Bronze (Weathered Brass).
- Complete with 2 metre cable.








*Water STOP Cable Joint*

| Item No. | Variant | | Wattage | Beam Angle | IP Rating | CCT | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Brz | | | | | 3000K | 4000K | 6500K |
| DUSK-SPIKE-MR16 | 19117 | 19116 | 6W | 60° | 65 | TRIO | 500lm | 550lm | 550lm |

*Requires: 12V DC Constant Voltage LED Driver - Wire in Parallel*

*Replacement Globe*


| Item No. | Variants | Watt | Beam Angle | CCT | CRI | Lumen Output | | | Lifetime |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | Warm White 3000K | Neutral White 4000K | White 6500K | |
| KEY-MR16-TRIO | 65122 | 6W | 60° | TRIO | ≥80 | 500lm | 550lm | 550lm | 15,000hrs |

## Vivid Series

5 Pack DIY LED Deck Light kit, 5x0.6W, complete with plug and play cable and 12V DC LED Driver with flex and plug. 316 Stainless steel body with opal glass diffuser. Upgradable to maximum 10 lights by adding optional single deck light. Optional RF hand held dimmer (**21100**) also available upon request. Complete with 1 metre of cable per head.
*Note: 1.8m Flex and Plug to LED Driver. Driver to first light is 50cm, each light has 1m left and right, so max 2m spacing.*

## Single Colour 5 Pack Kit






**Cutout: Ø25mm**

## RGB Colour 5 Pack Kit

Colour controller with RF remote control. Multiple pre-set colour scenes as well as the option of choosing desired colour.









## Single Head

Single head only to suit 5 Pack DIY LED Deck Light kit. Designed only to be used with kits to allow for extra lights to be added. 316 Stainless steel body with opal glass diffuser. Complete with 1 metre of cable per head. Must be used only with VIVID series as an additional accessory to increase the number of heads from 5 to a maximum of 10 heads.



## Single Colour Dimming Controller

Single colour dimming controller and RF remote control to suit 5 Pack DIY LED Deck Light kit. Designed for use with Warm White and White 5 pack LED Deck light kits only.
*Must be used with single colour 5 Pack LED Deck Light Kits only.*



| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output |
|---|---|---|---|---|---|
| VIVID-5PK | **21101** | 5x0.6W | 67 | 3000K | 5x13lm |
| | **21102** | | | 5000K | 5x14lm |
| | **21103** | 5x0.6W | 67 | RGB | N/A |
| VIVID-1 | **21104** | 0.6W | 67 | 3000K | 13lm |
| | **21105** | | | 5000K | 14lm |
| | **21106** | | | RGB | N/A |
| VIVID-DIM | **21100** | N/A | N/A | N/A | N/A |

## Emit 25 TRIO Series

IK Rating 10 | IP Rating 67 | Replacement Warranty 5yr

Introducing the EMIT-25 LED Inground Light Series. The EMIT-25 is a mini inground light with a cutout of 19mm, ideal for lighting up features where minimalistic light effects are required. Featuring a 1W LED output, with a range of different fascia plates and metalware colour options. Choose from Round Open, Square Open, Eyelid and Halo fascias, as well as the multiway fascias available in 1WAY, 2WAY, 3WAY, and 4WAY. Metalware colour options range from Black, Stainless Steel, Antique Brass and Brushed Brass. Tri-Colour Selectable: Choose from 3000K Warm White, 4000K Neutral White and 5500K White colour temperature options. Functional with 12 and 24V DC Constant Voltage LED Drivers. Optional extra accessories such as narrow to medium Beam Angle Lens as well as Honeycomb and frosted diffusers are also available. Part of a family of different sizes to suit most inground lighting applications. Backed by a 5 Year Replacement Warranty.


### Specification Features

| | |
|---|---|
| Input Voltage: | 12/24V DC |
| Power (W): | 1W |
| IP rating (IP): | IP67 |
| IK Rating (IK): | IK10 |

| Lumens | RND OPEN | SQR OPEN | EYELID | 1 WAY | 2 WAY | 3 WAY | 4 WAY | HALO | RING |
|---|---|---|---|---|---|---|---|---|---|
| 3000K | 46 | 46 | 46 | 1.3 | 1.2 | 2.2 | 3.1 | 14 | 17 |
| 4000K | 51 | 51 | 51 | 1.3 | 1.2 | 2.2 | 3.1 | 14 | 17 |
| 5500K | 55 | 55 | 55 | 1.3 | 1.2 | 2.2 | 3.1 | 14 | 17 |

| | |
|---|---|
| LED type: | CREE |
| CCT: | 3000K-4000K-5500K (Changeable) |
| CRI: | ≥90 |
| Beam angle (°): | 19° - 36° - 60° (60° Standard) |
| Dimmable: | No |
| Lifespan (hrs): | 50,000hrs |
| Cutout (Ø): | Ø19mm Without Cannister<br>Ø22mm With Cannister |

*Requires 12 or 24V Constant Voltage LED Driver (Wire in Parallel)*

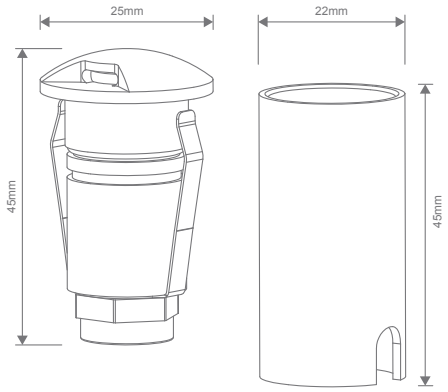



Honeycomb (Optional)


Opal Diffuser (Optional)


Water Stop Cable Joint


19° & 36° Lens (Optional)







## Stainless Steel


EMIT-25-RO-STS


EMIT-25-SO-STS


EMIT-25-EYELID-STS


EMIT-25-HALO-STS



EMIT-25-RING-STS



EMIT-25-1WAY-STS



EMIT-25-2WAY-STS



EMIT-25-3WAY-STS



EMIT-25-4WAY-STS



RND OPEN



SQR OPEN



EYELID


HALO & RING


1 WAY


2 WAY


3 WAY


4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-TRIO-STS | 10010 | 10011 | 10012 | 10013 | 10014 | 10015 | 10016 | 10017 | 10018 | TRIO |

## Black



EMIT-25-RO-BLK



EMIT-25-SO-BLK



EMIT-25-EYELID-BLK



EMIT-25-HALO-BLK



EMIT-25-RING-BLK



EMIT-25-1WAY-BLK




EMIT-25-2WAY-BLK




EMIT-25-3WAY-BLK




EMIT-25-4WAY-BLK




RND OPEN




SQR OPEN




EYELID




HALO & RING




1 WAY



2 WAY



3 WAY



4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-TRIO-BLK | 10000 | 10001 | 10002 | 10003 | 10004 | 10005 | 10006 | 10007 | 10008 | TRIO |







## Antique Brass



EMIT-25-RO-AB



EMIT-25-SO-AB



EMIT-25-EYELID-AB



EMIT-25-HALO-AB



EMIT-25-RING-AB



EMIT-25-1WAY-AB




EMIT-25-2WAY-AB




EMIT-25-3WAY-AB




EMIT-25-4WAY-AB




RND OPEN




SQR OPEN




EYELID




HALO & RING




1 WAY



2 WAY



3 WAY



4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-TRIO-AB | 10030 | 10031 | 10032 | 10033 | 10034 | 10035 | 10036 | 10037 | 10038 | TRIO |

## Brass



EMIT-25-RO-BRS



EMIT-25-SO-BRS



EMIT-25-EYELID-BRS



EMIT-25-HALO-BRS



EMIT-25-RING-BRS



EMIT-25-1WAY-BRS




EMIT-25-2WAY-BRS




EMIT-25-3WAY-BRS




EMIT-25-4WAY-BRS




RND OPEN




SQR OPEN




EYELID




HALO & RING




1 WAY



2 WAY



3 WAY



4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-RGBW-BRS | 10020 | 10021 | 10022 | 10023 | 10024 | 10025 | 10026 | 10027 | 10028 | RGBW |











## Emit 25 RGBW Series


RGBW · IK Rating 10 · IP Rating 67 · Replacement 5yr Warranty

Introducing the EMIT-25 RGBW LED Inground Light Series. The EMIT-25 RGBW is a mini inground light with a cutout of 19mm, ideal for lighting up features where minimalistic light effects are required. Featuring a 1W LED output, with a range of different fascia plates and metalware colour options. Choose from Round Open, Square Open, Eyelid and Halo fascias, as well as the multiway fascias available in 1WAY, 2WAY, 3WAY, and 4WAY. Metalware colour options range from Black, Stainless Steel, Antique Brass and Brushed Brass. RGBW Colour Changeable with the use of an RGBW Colour Controller. Colour selectable from RGB as well as White colours. Functional with 12 and 24V DC Constant Voltage LED Drivers. Optional extra accessories such as narrow to medium Beam Angle Lens as well as Honeycomb and frosted diffusers are also available. Part of a family of different sizes to suit most inground lighting applications. Backed by a 5 Year Replacement Warranty.

### Specification Features

| | |
|---|---|
| Input Voltage: | 12/24V DC |
| Power (W): | 1W |
| IP rating (IP): | IP67 |
| IK Rating (IK): | IK10 |
| LED type: | CREE |
| CCT: | RGBW |
| Beam angle (°): | 19° - 36° - 60° (60° Standard) |
| Dimmable: | No |
| Lifespan (hrs): | 50,000hrs |
| Cutout (Ø): | Ø19mm Without Cannister<br>Ø22mm With Cannister |

*Requires RGBW Colour Controller (Suggested Controller - CHAM-BT-RF-5C* **20141***)*
*Requires 12 or 24V Constant Voltage LED Driver (Wire in Parallel)*

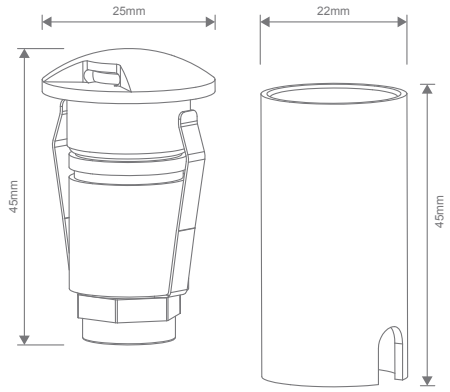




Honeycomb (Optional)



Opal Diffuser (Optional)



Water Stop Cable Joint



19° & 36° Lens (Optional)


## Stainless Steel



EMIT-25-RO-STS | EMIT-25-SO-STS | EMIT-25-EYELID-STS | EMIT-25-HALO-STS | EMIT-25-RING-STS



EMIT-25-1WAY-STS | EMIT-25-2WAY-STS | EMIT-25-3WAY-STS | EMIT-25-4WAY-STS

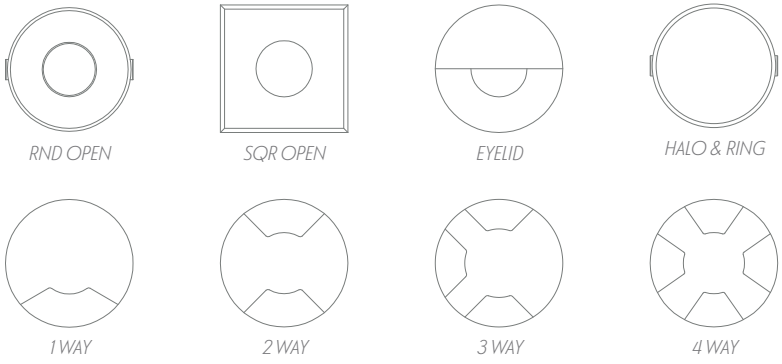

RND OPEN | SQR OPEN | EYELID | HALO & RING

1 WAY | 2 WAY | 3 WAY | 4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-RGBW-STS | 10010 | 10011 | 10012 | 10013 | 10014 | 10015 | 10016 | 10017 | 10018 | RGBW |








## Black



EMIT-25-RO-BLK | EMIT-25-SO-BLK | EMIT-25-EYELID-BLK | EMIT-25-HALO-BLK | EMIT-25-RING-BLK



EMIT-25-1WAY-BLK | EMIT-25-2WAY-BLK | EMIT-25-3WAY-BLK | EMIT-25-4WAY-BLK

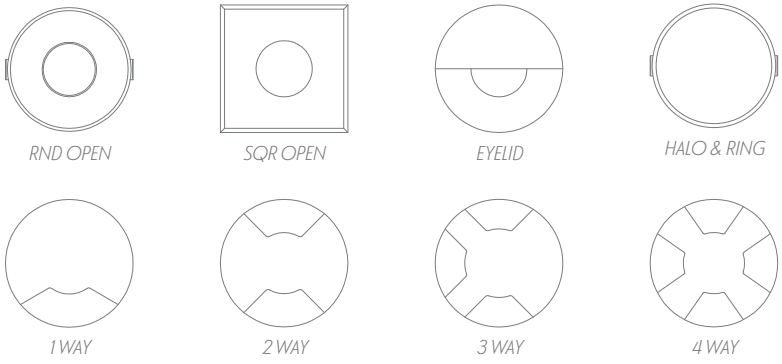

RND OPEN | SQR OPEN | EYELID | HALO & RING

1 WAY | 2 WAY | 3 WAY | 4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-RGBW-BLK | 10000 | 10001 | 10002 | 10003 | 10004 | 10005 | 10006 | 10007 | 10008 | RGBW |


## Antique Brass



EMIT-25-RO-AB EMIT-25-SO-AB EMIT-25-EYELID-AB EMIT-25-HALO-AB EMIT-25-RING-AB



EMIT-25-1WAY-AB EMIT-25-2WAY-AB EMIT-25-3WAY-AB EMIT-25-4WAY-AB

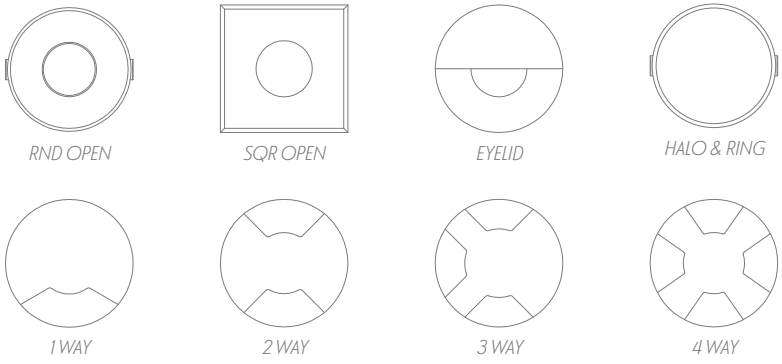

RND OPEN SQR OPEN EYELID HALO & RING

1 WAY 2 WAY 3 WAY 4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-RGBW-AB | 10070 | 10071 | 10072 | 10073 | 10074 | 10075 | 10076 | 10077 | 10078 | RGBW |








## Brass



EMIT-25-RO-BRS EMIT-25-SO-BRS EMIT-25-EYELID-BRS EMIT-25-HALO-BRS EMIT-25-RING-BRS



EMIT-25-1WAY-BRS EMIT-25-2WAY-BRS EMIT-25-3WAY-BRS EMIT-25-4WAY-BRS

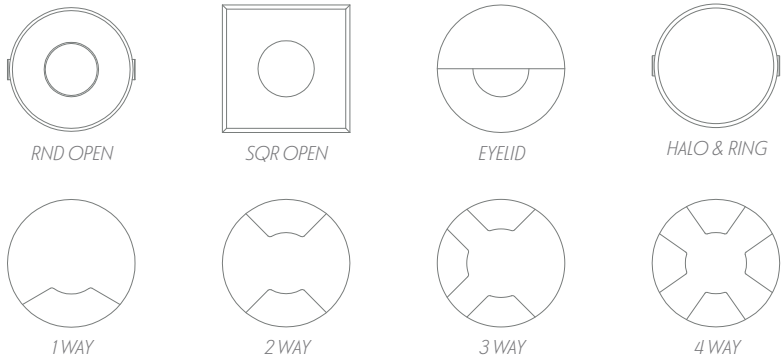

RND OPEN SQR OPEN EYELID HALO & RING

1 WAY 2 WAY 3 WAY 4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-RGBW-BRS | 10060 | 10061 | 10062 | 10063 | 10064 | 10065 | 10066 | 10067 | 10068 | RGBW |

## Emit 55 TRIO Series

IK Rating 10 | IP Rating 67 | Replacement Warranty 5yr

Introducing the EMIT-55 LED Inground Light Series. The EMIT-55 is a 55mm overall diameter inground light with a cutout of 43mm without cannister, ideal for lighting up features where minimalistic light effects are required. Featuring a 2.5W LED output, with a range of different fascia plates and metalware colour options. Choose from Round Open, Square Open, Eyelid and Halo fascias, as well as the multiway fascias available in 1WAY, 2WAY, 3WAY, and 4WAY. Metalware colour options range from Black, Stainless Steel, Antique Brass and Brushed Brass. Tri-Colour Selectable: Choose from 3000K Warm White, 4000K Neutral White and 5500K White colour temperature options. Functional with 12 and 24V DC Constant Voltage LED Drivers. Optional extra accessories such as narrow to medium Beam Angle Lens as well as Honeycomb, Linear Lens and opal diffuser are also available. Part of a family of different sizes to suit most inground lighting applications. Backed by a 5 Year Replacement Warranty.


### Specification Features

| | |
|---|---|
| Input Voltage: | 12/24V DC |
| Power (W): | 2.5W |
| IP rating (IP): | IP67 |
| IK Rating (IK): | IK10 |

| Lumens | RND OPEN | SQR OPEN | EYELID | 1 WAY | 2 WAY | 3 WAY | 4 WAY | HALO | RING |
|---|---|---|---|---|---|---|---|---|---|
| 3000K | 135 | 135 | 80 | 2.5 | 5.4 | 4.0 | 4.4 | 22 | 28 |
| 4000K | 145 | 145 | 85 | 2.5 | 5.4 | 4.0 | 4.4 | 22 | 28 |
| 5500K | 150 | 150 | 88 | 2.5 | 5.4 | 4.0 | 4.4 | 22 | 28 |

| | |
|---|---|
| LED type: | CREE |
| CCT: | 3000K-4000K-5500K (Changeable) |
| CRI: | ≥90 |
| Beam angle (°): | 19° - 36° - 60° (60° Standard) |
| Dimmable: | No |
| Lifespan (hrs): | 50,000hrs |
| Cutout (Ø): | Ø45mm Without Cannister |
| | Ø48mm With Cannister |

*Requires 12 or 24V Constant Voltage LED Driver (Wire in Parallel)*

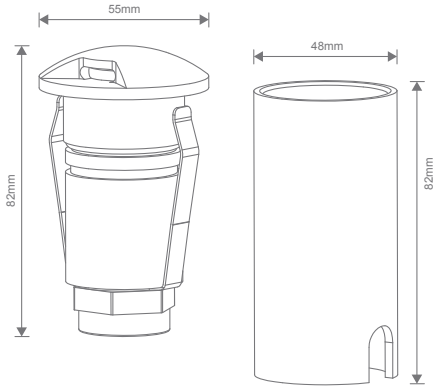



Water Stop Cable Joint


Honeycomb (Optional)


Opal Diffuser (Optional)


Linear Lens (Optional)


19° & 36° Lens (Optional)







## Stainless Steel


EMIT-55-RO-STS


EMIT-55-SO-STS


EMIT-55-EYELID-STS


EMIT-55-HALO-STS



EMIT-55-RING-STS



EMIT-55-1WAY-STS



EMIT-55-2WAY-STS



EMIT-55-3WAY-STS



EMIT-55-4WAY-STS



RND OPEN



SQR OPEN



EYELID


HALO & RING


1 WAY


2 WAY


3 WAY


4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-55-TRIO-STS | 10097 | 10098 | 10099 | 10100 | 10101 | 10102 | 10103 | 10104 | 10105 | TRIO |

## Black


EMIT-55-RO-BLK


EMIT-55-SO-BLK


EMIT-55-EYELID-BLK


EMIT-55-HALO-BLK



EMIT-55-HALO-BLK



EMIT-55-1WAY-BLK



EMIT-55-2WAY-BLK



EMIT-55-3WAY-BLK



EMIT-55-4WAY-BLK



RND OPEN



SQR OPEN



EYELID


HALO & RING


1 WAY


2 WAY


3 WAY


4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-55-TRIO-BLK | 10087 | 10088 | 10089 | 10090 | 10091 | 10092 | 10093 | 10094 | 10095 | TRIO |







## Antique Brass


EMIT-55-RO-AB


EMIT-55-SO-AB


EMIT-55-EYELID-AB


EMIT-55-HALO-AB



EMIT-55-RING-AB



EMIT-55-1WAY-AB



EMIT-55-2WAY-AB



EMIT-55-3WAY-AB



EMIT-55-4WAY-AB



RND OPEN



SQR OPEN



EYELID


HALO & RING


1 WAY


2 WAY


3 WAY


4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-25-TRIO-AB | 10117 | 10118 | 10119 | 10120 | 10121 | 10122 | 10123 | 10124 | 10125 | TRIO |

## Brass



EMIT-55-RO-BRS



EMIT-55-SO-BRS



EMIT-55-EYELID-BRS



EMIT-55-HALO-BRS



EMIT-55-RING-BRS



EMIT-55-1WAY-BRS




EMIT-55-2WAY-BRS




EMIT-55-3WAY-BRS




EMIT-55-4WAY-BRS




RND OPEN




SQR OPEN




EYELID




HALO & RING




1 WAY



2 WAY



3 WAY



4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-55-TRIO-BRS | 10107 | 10108 | 10109 | 10110 | 10111 | 10112 | 10113 | 10114 | 10115 | TRIO |







## Emit 55 RGBW Series


RGBW · IK Rating 10 · IP Rating 67 · Replacement 5yr Warranty

Introducing the EMIT-55-RGBW LED Inground Light Series. The EMIT-55 is a 55mm overall diameter inground light with a cutout of 43mm without cannister, ideal for lighting up features where minimalistic light effects are required. Featuring a 2.5W LED output, with a range of different fascia plates and metalware colour options. Choose from Round Open, Square Open, Eyelid and Halo fascias, as well as the multiway fascias available in 1WAY, 2WAY, 3WAY, and 4WAY. Metalware colour options range from Black, Stainless Steel, Antique Brass and Brushed Brass. RGBW Colour Changeable with the use of an RGBW Colour Controller. Colour selectable from RGB as well as White colours. Functional with 12 and 24V DC Constant Voltage LED Drivers. Optional extra accessories such as narrow to medium Beam Angle Lens as well as Honeycomb and frosted diffusers are also available. Part of a family of different sizes to suit most inground lighting applications. Backed by a 5 Year Replacement Warranty.

### Specification Features


| | |
|---|---|
| Input Voltage: | 12/24V DC |
| Power (W): | 2.5W |
| IP rating (IP): | IP67 |
| IK Rating (IK): | IK10 |
| LED type: | CREE |
| CCT: | RGBW |
| Beam angle (°): | 19° - 36° - 60° (60° Standard) |
| Dimmable: | No |
| Lifespan (hrs): | 50,000hrs |
| Cutout (Ø): | Ø45mm Without Cannister<br>Ø48mm With Cannister |

*Requires RGBW Colour Controller (Suggested Controller - CHAM-BT-RF-5C* **20141***)*
*Requires 12 or 24V Constant Voltage LED Driver (Wire in Parallel)*

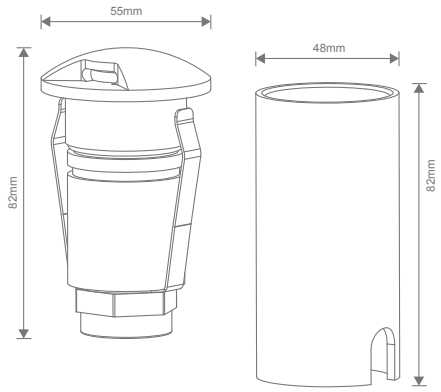




Honeycomb (Optional)



Opal Diffuser (Optional)



Water Stop Cable Joint



19° & 36° Lens (Optional)


## Stainless Steel



EMIT-55-RO-STS | EMIT-55-SO-STS | EMIT-55-EYELID-STS | EMIT-55-HALO-STS | EMIT-55-RING-STS



EMIT-55-1WAY-STS | EMIT-55-2WAY-STS | EMIT-55-3WAY-STS | EMIT-55-4WAY-STS

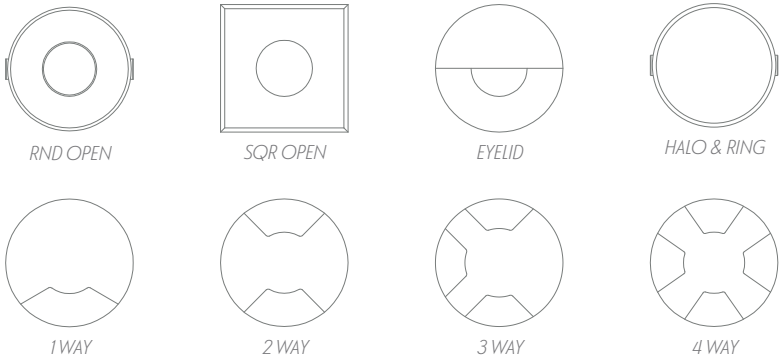

RND OPEN | SQR OPEN | EYELID | HALO & RING

1 WAY | 2 WAY | 3 WAY | 4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-55-RGBW-STS | 10137 | 10138 | 10139 | 10140 | 10141 | 10142 | 10143 | 10144 | 10145 | RGBW |








## Black



EMIT-55-RO-BLK | EMIT-55-SO-BLK | EMIT-55-EYELID-BLK | EMIT-55-HALO-BLK | EMIT-55-RING-BLK



EMIT-55-1WAY-BLK | EMIT-55-2WAY-BLK | EMIT-55-3WAY-BLK | EMIT-55-4WAY-BLK

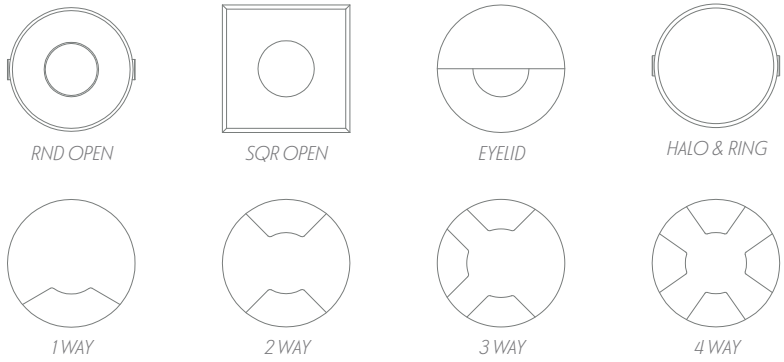

RND OPEN | SQR OPEN | EYELID | HALO & RING

1 WAY | 2 WAY | 3 WAY | 4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-55-RGBW-BLK | 10127 | 10128 | 10129 | 10130 | 10131 | 10132 | 10133 | 10134 | 10135 | RGBW |

## Antique Brass


EMIT-55-AB-RO


EMIT-55-AB-SO


EMIT-55-AB-EYELID


EMIT-55-AB-HALO



EMIT-55-AB-RING



EMIT-55-AB-1WAY



EMIT-55-AB-2WAY



EMIT-55-AB-3WAY



EMIT-55-AB-4WAY



RND OPEN



SQR OPEN



EYELID


HALO & RING


1 WAY


2 WAY


3 WAY


4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-55-RGBW-AB | 10157 | 10158 | 10159 | 10160 | 10161 | 10162 | 10163 | 10164 | 10165 | RGBW |







## Brass


EMIT-55-BRS-RO


EMIT-55-BRS-SO


EMIT-55-BRS-EYELID


EMIT-55-BRS-HALO



EMIT-55-BRS-RING



EMIT-55-BRS-1WAY



EMIT-55-BRS-2WAY



EMIT-55-BRS-3WAY



EMIT-55-BRS-4WAY



RND OPEN



SQR OPEN



EYELID


HALO & RING


1 WAY


2 WAY


3 WAY


4 WAY

| Item No. | Variant | | | | | | | | | CCT |
|---|---|---|---|---|---|---|---|---|---|---|
| | RND Open | SQR Open | Eyelid | 1 Way | 2 Way | 3 Way | 4 Way | Halo | Ring | |
| EMIT-55-RGBW-BRS | 10147 | 10148 | 10149 | 10150 | 10151 | 10152 | 10153 | 10154 | 10155 | RGBW |

## Deka Series

- COB LED chip.
- Anodised Aluminium or Solid Brass fascia.
- Black anodised Aluminium body.
- 60 Degrees beam angle (on open face).
- Installation cannister included.

### Open/Eyelid



DEKA-EYELID (Aluminium)



DEKA-EYELID (Brass)



DEKA-RND (Aluminium)



DEKA-RND (Brass)



DEKA-SQR (Aluminium)



DEKA-SQR (Brass)

### 1-4 Ways



DEKA-1WAY (Aluminium)



DEKA-1WAY (Brass)



DEKA-2WAY (Aluminium)



DEKA-2WAY (Brass)



DEKA-3WAY (Aluminium)



DEKA-3WAY (Brass)



DEKA-4WAY (Aluminium)



DEKA-4WAY (Brass)











Covers: SQR, RND
1,2,3,4 Way & Eyelid




SQR, RND

1,2,3,4 Way & Eye Lid

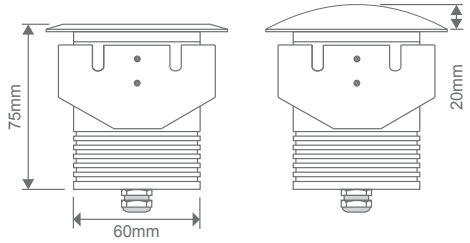


Cutout:Ø77mm

| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output | Requires |
|---|---|---|---|---|---|---|
| DEKA BODY | 19458 | 3W | 65 | 3000K | 300lm | 12V DC Constant Voltage LED Driver – Wire in Parallel |
| | 19459 | | | 5000K | 350lm | |


| ITEM NO. | | Variant | |
|---|---|---|---|
| | | Alu | Brs |
| DEKA FASCIA | Round Cover | 19424 | 19438 |
| | Square Cover | 19426 | 19440 |
| | Eyelid Cover | 19436 | 19450 |
| | 1-Way | 19428 | 19442 |
| | 2-Way | 19430 | 19444 |
| | 3-Way | 19432 | 19446 |
| | 4-Way | 19434 | 19448 |

*Please order this product in two parts using two codes, one for the body and another for the fascia.*




# Electromagnetic Induction


No direct cable connection
from base unit to LED Light.

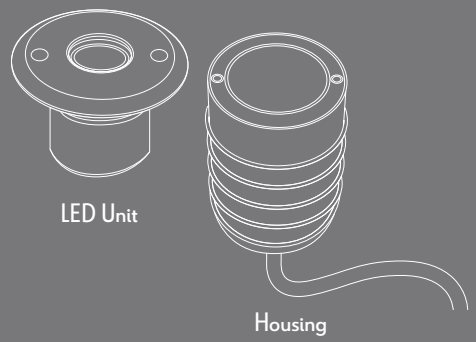


Induction technology passes current
to LED Light through magnetic process
to illuminate LED.

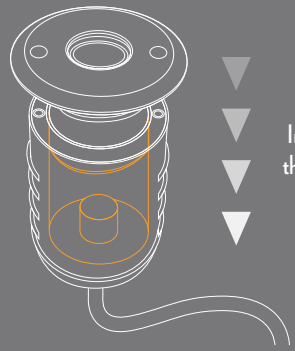



No more failed Inground lights
from filling up with water,
simply provide a 24V DC waterproof
connection to the unit.

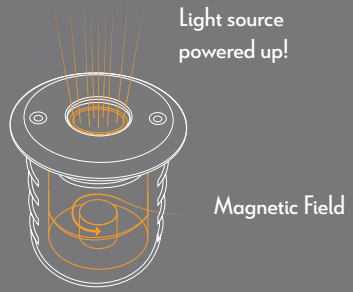





## Magneto Series

Introducing a revolutionary new design in inground lighting. The MAGNETO series from Domus features induction technology to transfer electrical current from the base pot to the light unit WITHOUT any cable connection. This avoids water syphoning through the cables and causing the LED light to prematurely fail due to moisture. Also provides for a very easy maintenance by simply unscrewing the light unit and replacing it without the need for an electrician. Ideal as a path light or inground light close to walls or columns to achieve wall washing or v-line effects. 3W 24V DC LED Inground light, 316 Stainless Steel Light Unit, optic lens diffuser. Available as a spot or flood.

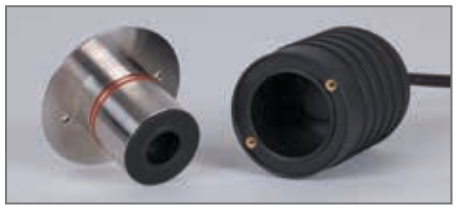

*Magneto-3 (60º or 25º)*



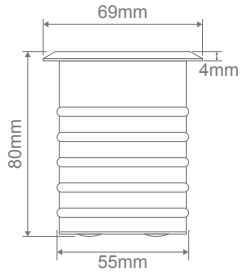


**Cutout: Ø60-65mm**



| Item No. | Variant | Wattage | IP Rating | CCT | Beam Angle | Lumen Output | Requires |
|---|---|---|---|---|---|---|---|
| MAGNETO 3 60D | 21082 | 3W | 67 | 3000K | 60° | 95lm | 24V DC Constant Voltage LED Driver - Wire in Parallel |
| | 21083 | | | 5000K | | | |
| MAGNETO 3 25D | 21080 | 3W | 67 | 3000K | 25° | 95lm | 24V DC Constant Voltage LED Driver - Wire in Parallel |
| | 21081 | | | 5000K | | | |


*Drive over rating: 2000kg*

## Magneto Series



Magneto-9-45°



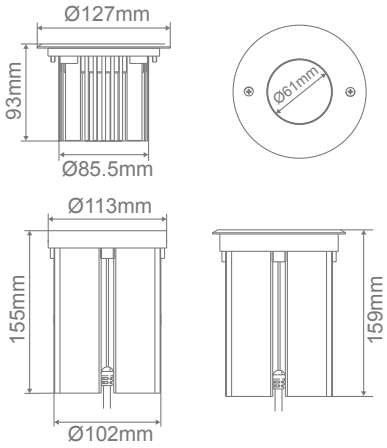




**Cutout: Ø110-120mm**

| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output | Requires |
|---|---|---|---|---|---|---|
| MAGNETO-9-45D | 21086 | 9W | 67 | 3000K | 675lm | 24V DC Constant Voltage |
| | 21088 | | | 5000K | 720lm | LED Driver - Wire in Parallel |






## Magneto Series



Magneto-18-45°



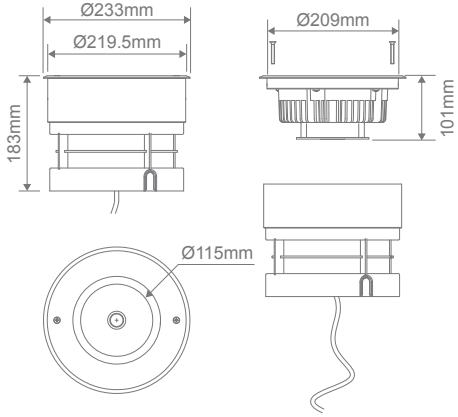




**Cutout: Ø205-215mm**

| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output | Requires |
|---|---|---|---|---|---|---|
| MAGNETO-18-45D | 21095 | 18W | 67 | 3000K | 1350lm | 24V DC Constant Voltage |
| | 21098 | | | 5000K | 1450lm | LED Driver - Wire in Parallel |

## Modula Series


- COB LED chip.
- Anodised Aluminium.
- Black anodised Aluminium body.
- 45 Degrees beam angle.
- Installation cannister included.
- Drive over rating of 2000kgs




MODULA-9-RND



MODULA-9-SQR

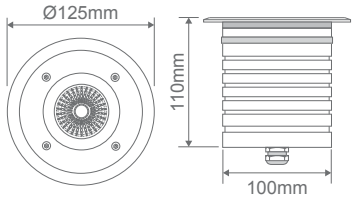


Cutout: Ø110mm




Cutout: Ø110mm

| Item No. | Variant | Wattage | IP Rating | CCT | Lumen Output | Requires |
|---|---|---|---|---|---|---|
| MODULA-9-RND | 19420 | 9W | 65 | 3000K | 900lm | 24V DC Constant Voltage LED Driver - Wire in Parallel |
| | 19421 | | | 5000K | 950lm | |
| MODULA-9-SQR | 19422 | 9W | 65 | 3000K | 900lm | 24V DC Constant Voltage LED Driver - Wire in Parallel |
| | 19423 | | | 5000K | 950lm | |







## Versa Series


- Polycarbonate Body and Diffuser.
- IK08 Impact rated.
- Triple wattage option.
- Inbuilt LED driver included.
- Side Conduit entry.



VERSA-300-PLN



VERSA-300-ELID

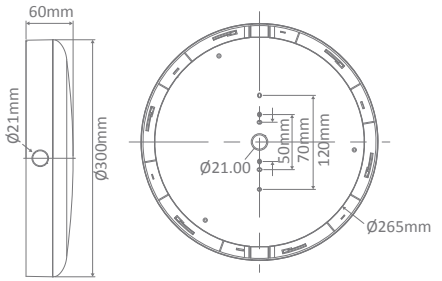


| Item No. | Variant | | Wattage (Switchable) | CCT | Watt | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|
| | Blk | Wht | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| VERSA-300-PLN | 19800 | 19802 | 15W/18W/25W | TRIO | 15W | 1380lm | 1420lm | 1470lm |
| | | | | | 18W | 1560lm | 1650lm | 1710lm |
| | | | | | 25W | 2080lm | 2200lm | 2320lm |
| VERSA-300-EYE | 19804 | 19806 | 15W/18W/25W | TRIO | 15W | 830lm | 850lm | 880lm |
| | | | | | 18W | 940lm | 990lm | 1050lm |
| | | | | | 25W | 1250lm | 1320lm | 1400lm |

## Polysphere Series

- Injection Moulded Thermoplastic Base.
- Acrylic Sphere.
- Designed to suit 60mm OD posts.



Smoke



Opal

200mm

250mm

300mm



Polysphere Lights

Exterior

IK Rating 06 | Voltage 240V | IP Rating 44 | Replacement 12 month Warranty




Smoke



Opal

400mm

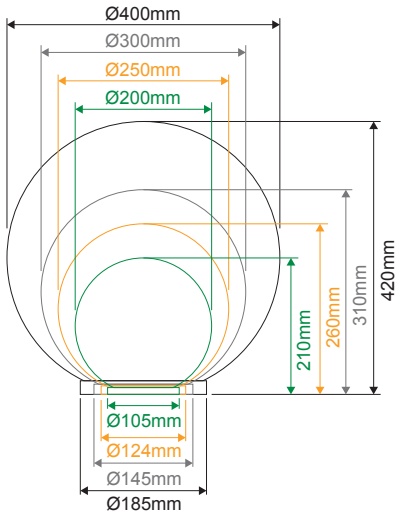


**Sphere Hole Size:**

| *Inner Hole* | *Outer Hole* |
|---|---|
| 92mm | 99mm |
| 110mm | 118mm |
| 120mm | 139mm |
| 165mm | 178mm |

| Item No. | Variant | | IP Rating | Wattage | Requires |
|---|---|---|---|---|---|
| | Blk/Opl | Blk/Smk | | | |
| POLYSPHERE 200 | 18599 | 18600 | 44 | 25W LED Max | 1xE27 Globe (Not Included) |
| POLYSPHERE 250 | 18601 | 18602 | 44 | 25W LED Max | 1xE27 Globe (Not Included) |
| POLYSPHERE 300 | 18603 | 18604 | 44 | 25W LED Max | 1xE27 Globe (Not Included) |
| POLYSPHERE 400 | 18605 | 18606 | 44 | 25W LED Max | 1xE27 Globe (Not Included) |

## 60mm Aluminium Post Series




| Item No. | Variant | | | | | Size |
|---|---|---|---|---|---|---|
| | Blk | Grn | Slr | Bge | Wht | |
| AP-6010 | 10820 | 10822 | 10821 | 10819 | 10824 | 60x1000mm |
| AP-6015 | 10826 | 10828 | 10827 | 10825 | 10830 | 60x1500mm |
| AP-6020 | 10832 | 10834 | 10833 | 10831 | 10836 | 60x2000mm |
| AP-6025 | 10838 | 10840 | 10839 | 10837 | 10842 | 60x2500mm |







## 76mm Aluminium Post Series

- BB-100 base can hold 60mm post internally or 76mm post externally.
- Please note that 76mm post must be mechanically fixed to base manually, as there is no provision on the post nor the base supplied. Contractor to supply screw fixings and screws and assemble.





BB-100

| Item No. | Variant | | | | | Size |
|---|---|---|---|---|---|---|
| | Blk | Grn | Wht | Bge | Slr | |
| AP-7610 | 10850 | 10852 | 10853 | 10849 | 10851 | 76x1000mm |
| AP-7615 | 10855 | 10857 | 10858 | 10854 | 10856 | 76x1500mm |
| AP-7620 | 10860 | 10862 | 10863 | 10859 | 10861 | 76x2000mm |
| BB-100 | 10696 | 10698 | 10699 | 10695 | 10697 | Suits 60mm & 76mm post |

## BL-100

- Cast Aluminium, powder coated.
- Designed to suit 76mm OD posts.



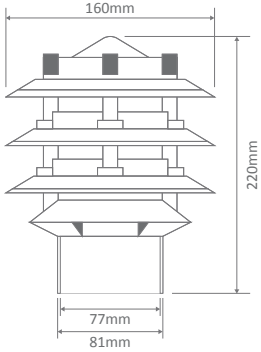




*BL-A1-60 - Designed to adapt bollard head 76mm opening to fix 60mm diameter posts.*

| Item No. | Variants | | | | | | IP Rating | Wattage | Requires |
|---|---|---|---|---|---|---|---|---|---|
| | Blk | Grn | Wht | Bge | Slr | Spare Glass | | | |
| BL -100 | 10701 | 10703 | 10704 | 10700 | 10702 | 10773 | 44 | 25W LED Max | 1xE27 Globe (Not Included) |
| BL-A1-60 | 10724 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |







## BL-100-1M-KIT

- Cast Aluminium, powder coated.
- 1 Metre long, 76mm wide OD post.





| Item No. | Variants | | | | | IP Rating | Wattage | Requires |
|---|---|---|---|---|---|---|---|---|
| | Blk | Grn | Wht | Bge | Slr | | | |
| BL -100-1M-KIT | 10729 | 10731 | 10732 | 10728 | 10730 | 44 | 25W LED Max | 1xE27 Globe (Not Included) |

## BL-200

IP Rating 44 | Replacement 12 month Warranty

- Cast Aluminium, powder coated.
- Designed to suit 76mm OD posts.



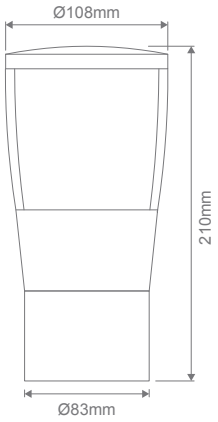




*BL-A2-60 - Designed to adapt bollard head 76mm opening to fix 60mm diameter posts.*

| Item No. | Variants | | | | | IP Rating | Wattage | Lamp Base |
|---|---|---|---|---|---|---|---|---|
| | Blk | Grn | Wht | Bge | Slr | | | |
| BL -200 | 10707 | 10709 | 10710 | 10706 | 10708 | 44 | 25W LED Max | E27 (Lamp Not included) |
| BL-A2-60 | 10725 | N/A | N/A | N/A | N/A | N/A | N/A | N/A |







## BL-200-1M-KIT

IP Rating 44 | Replacement 12 month Warranty

- Cast Aluminium, powder coated.
- 1 Metre long, 76mm wide OD post.





| Item No. | Variants | | | | | IP Rating | Wattage | Lamp Base |
|---|---|---|---|---|---|---|---|---|
| | Blk | Grn | Wht | Bge | Slr | | | |
| BL -200-1M-KIT | 10735 | 10737 | 10738 | 10734 | 10736 | 44 | 25W LED Max | E27 (Lamp Not included) |

## BL-300

IP Rating 44 | Replacement 12 month Warranty

- Cast Aluminium, powder coated.
- Designed to suit 76mm OD posts.



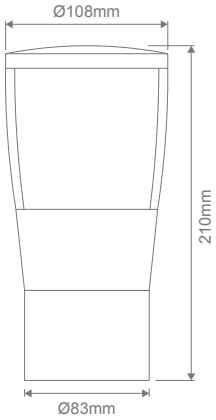




*BL-A2-60 - Designed to adapt bollard head 76mm opening to fix 60mm diameter posts.*

| Item No. | Variants | | | | | IP Rating | Wattage | Lamp Base |
|---|---|---|---|---|---|---|---|---|
| | Blk | Grn | Wht | Bge | Slr | | | |
| BL -300 | 10719 | 10721 | 10722 | 10718 | 10720 | 44 | 25W LED Max | E27 (Lamp Not included) |
| BL-A2-60 | 10725 | N/A | N/A | N/A | N/A | N/A | N/A | N/A |







## BL-300-1M-KIT

IP Rating 44 | Replacement 12 month Warranty

- Cast Aluminium, powder coated.
- 1 Metre long, 76mm wide OD post.





| Item No. | Variants | | | | | IP Rating | Wattage | Lamp Base |
|---|---|---|---|---|---|---|---|---|
| | Blk | Grn | Wht | Bge | Slr | | | |
| BL -300-1M-KIT | 10741 | 10743 | 10744 | 10740 | 10742 | 44 | 25W LED Max | E27 (Lamp Not included) |

## BL-400

- Cast Aluminium, powder coated.
- Designed to suit 76mm OD posts.
- Clear and Opal Polycarbonate diffuser options.








*BL-A2-60 - Designed to adapt bollard head 76mm opening to fix 60mm diameter posts.*

| Item No. | Variants | | IP Rating | Wattage | Lamp Base |
|---|---|---|---|---|---|
| | Clr | Frs | | | |
| BL -400 | 10670 | 10671 | 54 | 25W LED Max | E27 (Lamp Not included) |
| BL-A2-60 | 10725 | N/A | N/A | N/A | N/A |







## BL-400-1M-KIT

- Cast Aluminium, powder coated.
- 1 Metre long, 76mm wide OD post.







| Item No. | Variants | | IP Rating | Wattage | Lamp Base |
|---|---|---|---|---|---|
| | Clr | Frs | | | |
| BL -400-1M-KIT | 10682 | 10683 | 54 | 25W LED Max | E27 (Lamp Not included) |


## Sunsolar-1

- Constructed from ABS polymer and a polycarbonate opal diffuser.
- V0 fireproof, anti-UV
- Designed to suit 60mm posts.
- 3000K/4000K Colour Temperature switchable.






| Item No. | Variant | IP Rating | CCT |
|---|---|---|---|
| SUNSOLAR-1 | 10300 | 65 | DUO |




*Solar Panel*





## Sunsolar-1-Kit

- Constructed from ABS polymer and a polycarbonate opal diffuser.
- V0 fireproof, anti-UV
- Designed to suit 60mm posts.
- 3000K/4000K Colour Temperature switchable.

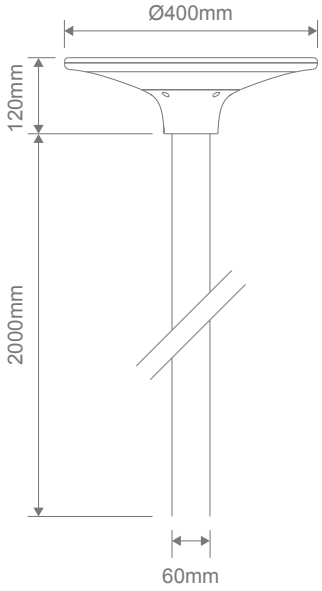




| Item No. | Variant | IP Rating | CCT |
|---|---|---|---|
| SUNSOLAR-1-KIT | 10304 | 65 | DUO |





Exterior

## Monaco Series

- Cast Aluminium, powder coated.
- Clear Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.


### GT-652 Wall Bracket
*Curved Arm*






### GT-654 Wall Bracket
*Straight Arm*







| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-652 | GT-654 | | | |
| 15806 | 15812 | | Beige | E27 |
| 15807 | 15813 | | Black | |
| 15808 | 15814 | | Burgundy | |
| 15809 | 15815 | | Green | |
| 15811 | 15817 | | White | |






### GT-653 Post Bracket
*to suit 60mm post mounting only*






### GT-650 Pendant






| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-650 | GT-653 | | | |
| 15800 | 16016 | | Beige | E27 |
| 15801 | 16017 | | Black | |
| 15802 | 16018 | | Burgundy | |
| 15803 | 16019 | | Green | |
| 15805 | 16020 | | White | |




Traditional Exterior


## GT-657 *Twin Head on Post 1.35m*



## GT-656 *Single Head on Post 1.35m*



**Width per model:**
*Single Head* - 430mm
*Double Head* - 840mm




| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-656 | GT-657 | | | |
| 15818 | 15824 | | Beige | E27* |
| 15819 | 15825 | | Black | |
| 15820 | 15826 | | Burgundy | |
| 15821 | 15827 | | Green | |
| 15823 | 15829 | | White | |

**The amount of globes needed will depend on the quantity of heads.*








## GT-659 *Twin Head on Post 1.98m*



## GT-658 *Single Head on Post 1.98m*



**Width per model:**
*Single Head* - 430mm
*Double Head* - 840mm

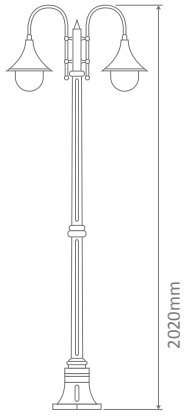


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-658 | GT-659 | | | |
| 15830 | 15836 | | Beige | E27* |
| 15831 | 15837 | | Black | |
| 15832 | 15838 | | Burgundy | |
| 15833 | 15839 | | Green | |
| 15835 | 15841 | | White | |

**The amount of globes needed will depend on the quantity of heads.*

## GT-664 *Triple Head on Post 2.35m*




## GT-660 *Single Head on Post 2.35m*



## GT-662 *Twin Head on Post 2.35m*



**Width per model:**
*Single Head* - 430mm
*Double Head* - 840mm
*Triple Head* - 820mm

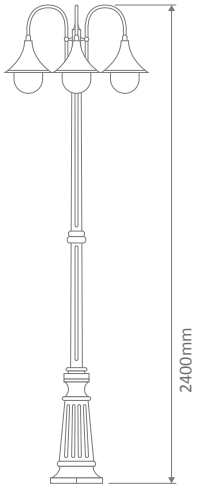


| Item No & Variant | | | Colour | | Globe |
|---|---|---|---|---|---|
| GT-660 | GT-662 | GT-664 | | | |
| 15842 | 15848 | 15854 | | Beige | E27* |
| 15843 | 15849 | 15855 | | Black | |
| 15844 | 15850 | 15856 | | Burgundy | |
| 15845 | 15851 | 15857 | | Green | |
| 15847 | 15853 | 15859 | | White | |

**The amount of globes needed will depend on the quantity of heads.*







## GT-1064 *Triple Head on Plain Post 2.40m*



## GT-1068 *Single Head on Plain Post 2.40m*



## GT-1066 *Twin Head on Plain Post 2.40m*



**Width per model:**
*Single Head* - 540mm
*Double Head* - 840mm
*Triple Head - 820mm*




| Item No & Variant | | | Colour | | Globe |
|---|---|---|---|---|---|
| GT-1064 | GT-1066 | GT-1068 | | | |
| 15860 | 15866 | 15872 | | Beige | E27* |
| 15861 | 15867 | 15873 | | Black | |
| 15862 | 15868 | 15874 | | Burgundy | |
| 15863 | 15869 | 15875 | | Green | |
| 15865 | 15871 | 15877 | | White | |


**The amount of globes needed will depend on the quantity of heads.*

## Lisbon Series

- Cast Aluminium, powder coated.
- Polycarbonate Sphere.
- Made-To-Order. Production lead times apply.


### GT-600 Wall Bracket *(250mm Sphere)*






### GT-602 Wall Bracket *(300mm Sphere)*






| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-600 | GT-602 | | | |
| 15662 | 15668 | | Beige | 1xE27 |
| 15663 | 15669 | | Black | |
| 15664 | 15670 | | Burgundy | |
| 15665 | 15671 | | Green | |
| 15667 | 15673 | | White | |






### GT-608 *(250mm Sphere)*
### GT-609 *(300mm Sphere)*
Double Head on Post 1.32m



### GT-606 *(250mm Sphere)*
### GT-607 *(300mm Sphere)*
Single Head on Post 1.32m



**Width per model:**
*Single Head* - 430mm
*Double Head* - 820mm

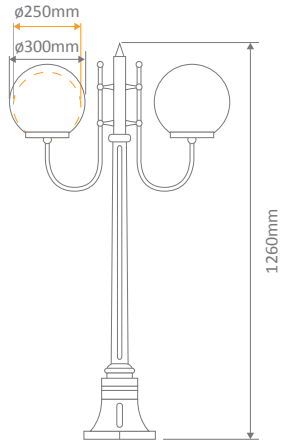


| Item No & Variant | | | | Colour | | Globe |
|---|---|---|---|---|---|---|
| GT-606 | GT-607 | GT-608 | GT-609 | | | |
| 15674 | 15680 | 15686 | 15692 | | Beige | E27* |
| 15675 | 15681 | 15687 | 15693 | | Black | |
| 15676 | 15682 | 15688 | 15694 | | Burgundy | |
| 15677 | 15683 | 15689 | 15695 | | Green | |
| 15679 | 15685 | 15691 | 15697 | | White | |

**The amount of globes needed will depend on the quantity of heads.*





Traditional Exterior

**GT-614** *(250mm Sphere)*
**GT-615** *(300mm Sphere)*
Double Head on Post 1.94m



**GT-612** *(250mm Sphere)*
**GT-613** *(300mm Sphere)*
Single Head on Post 1.94m



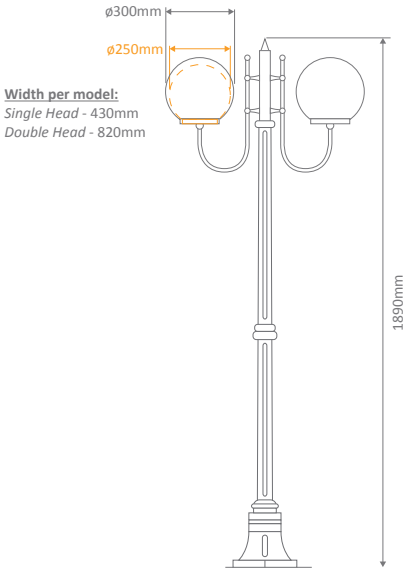


| Item No & Variant | | | | Colour | | Globe |
|---|---|---|---|---|---|---|
| GT-612 | GT-613 | GT-614 | GT-615 | | | |
| 15698 | 15704 | 15710 | 15716 | | Beige | E27* |
| 15699 | 15705 | 15711 | 15717 | | Black | |
| 15700 | 15706 | 15712 | 15718 | | Burgundy | |
| 15701 | 15707 | 15713 | 15719 | | Green | |
| 15703 | 15709 | 15715 | 15721 | | White | |

**The amount of globes needed will depend on the quantity of heads.*






Lisbon

**GT-620** *(250mm Sphere)*
**GT-621** *(300mm Sphere)*
Double Head on Post 2.29m



**GT-618** *(250mm Sphere)*
**GT-619** *(300mm Sphere)*
Single Head on Post 2.29m



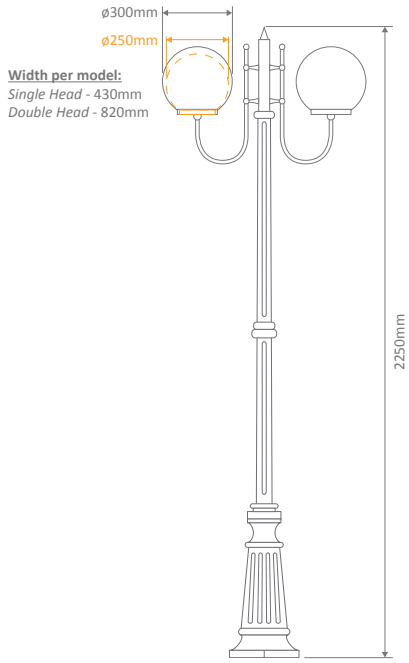


| Item No & Variant | | | | Colour | | Globe |
|---|---|---|---|---|---|---|
| GT-618 | GT-619 | GT-620 | GT-621 | | | |
| 15722 | 15728 | 15734 | 15740 | | Beige | E27* |
| 15723 | 15729 | 15735 | 15741 | | Black | |
| 15724 | 15730 | 15736 | 15742 | | Burgundy | |
| 15725 | 15731 | 15737 | 15743 | | Green | |
| 15727 | 15733 | 15739 | 15745 | | White | |


**The amount of globes needed will depend on the quantity of heads.*

**GT-626** *(250mm Sphere)*
**GT-627** *(300mm Sphere)*
*Quadruple Head on Post 2.54m*



**GT-622** *(250mm Sphere)*
**GT-623** *(300mm Sphere)*
*Triple Head on Post 2.54m*



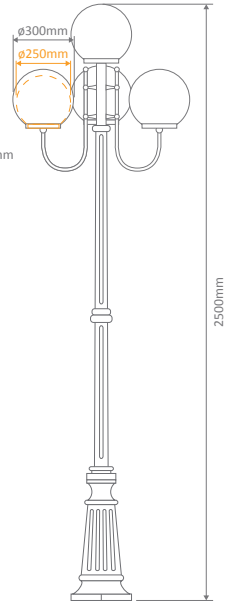


**Width per model:**
*Triple Head* - 890mm
*Quadruple Head* - 780mm

| Item No & Variant | | | | Colour | | Globe |
|---|---|---|---|---|---|---|
| GT-622 | GT-623 | GT-626 | GT-627 | | | |
| 15746 | 15752 | 15770 | 15776 | | Beige | E27* |
| 15747 | 15753 | 15771 | 15777 | | Black | |
| 15748 | 15754 | 15772 | 15778 | | Burgundy | |
| 15749 | 15755 | 15773 | 15779 | | Green | |
| 15751 | 15757 | 15775 | 15781 | | White | |


**The amount of globes needed will depend on the quantity of heads.*





**GT-624** *(250mm Sphere)*
**GT-625** *(300mm Sphere)*
*Triple Head on Post 2.29m*



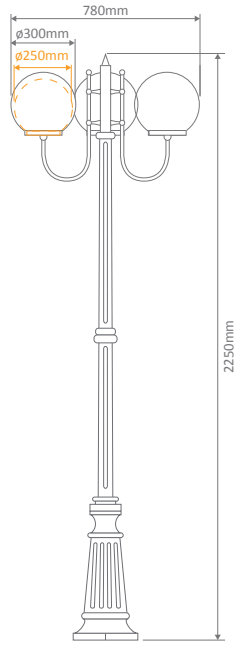


| Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-624 | GT-625 | | | |
| 15758 | 15764 | | Beige | 3xE27 |
| 15759 | 15765 | | Black | |
| 15760 | 15766 | | Burgundy | |
| 15761 | 15767 | | Green | |
| 15763 | 15769 | | White | |




Traditional Exterior

## GT-1003 *Triple Head on Plain Post 2.4m*




## GT-1001 *Single Head on Plain Post 2.4m*



## GT-1002 *Twin Head on Plain Post 2.4m*



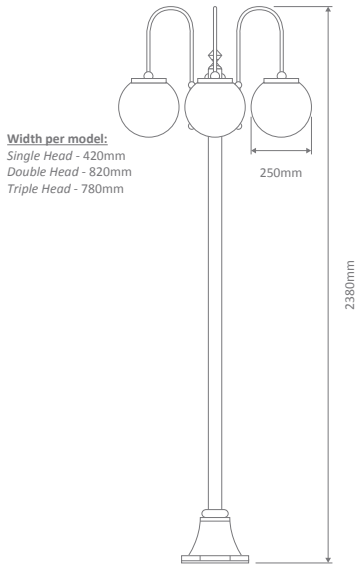


| Item No & Variant | | | Colour | | Globe |
|---|---|---|---|---|---|
| GT-1001 | GT-1002 | GT-1003 | | | |
| 15782 | 15788 | 15794 | | Beige | E27* |
| 15783 | 15789 | 15795 | | Black | |
| 15784 | 15790 | 15796 | | Burgundy | |
| 15785 | 15791 | 15797 | | Green | |
| 15787 | 15793 | 15799 | | White | |

**The amount of globes needed will depend on the quantity of heads.*












# Siena Series

Voltage 240V · Replacement 12 month Warranty · IP Rating 43 · Made In Italy · Assembled in AUS

- Cast Aluminium, powder coated.
- Polycarbonate Sphere.
- Made-To-Order. Production lead times apply.

## GT-544 *(200mm Sphere)*
## GT-545 *(250mm Sphere)*
*Wall Bracket*




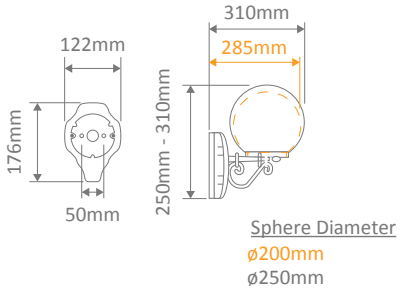


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-544 | GT-545 | | | |
| 15566 | 15572 | | Beige | 1xE27 |
| 15567 | 15573 | | Black | |
| 15568 | 15574 | | Burgundy | |
| 15569 | 15575 | | Green | |
| 15571 | 15577 | | White | |

## GT-502 *(200mm Sphere)*
*Wall Bracket*







| Item No & Variant | Colour | | Globe |
|---|---|---|---|
| GT-502 | | | |
| 15518 | | Beige | 1xE27 |
| 15519 | | Black | |
| 15520 | | Burgundy | |
| 15521 | | Green | |
| 15523 | | White | |

## GT-503 *(250mm Sphere)*
## GT-504 *(300mm Sphere)*

*180mm Pillar Mount*







| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-503 | GT-504 | | | |
| 15524 | 15530 | | Beige | 1xE27 |
| 15525 | 15531 | | Black | |
| 15526 | 15532 | | Burgundy | |
| 15527 | 15533 | | Green | |
| 15529 | 15535 | | White | |

## GT-530 *(200mm Sphere)*
## GT-531 *(250mm Sphere)*

*80mm Pillar Mount*







| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-530 | GT-531 | | | |
| 15536 | 15542 | | Beige | 1xE27 |
| 15537 | 15543 | | Black | |
| 15538 | 15544 | | Burgundy | |
| 15539 | 15545 | | Green | |
| 15541 | 15547 | | White | |

## GT-535 *(200mm Sphere)*
## GT-536 *(250mm Sphere)*
## GT-537 *(300mm Sphere)*

*Pendant*






| Item No & Variant | | | Colour | | Globe |
|---|---|---|---|---|---|
| GT-535 | GT-536 | GT-537 | | | |
| 15548 | 15554 | 15560 | | Beige | 1xE27 |
| 15549 | 15555 | 15561 | | Black | |
| 15550 | 15556 | 15562 | | Burgundy | |
| 15551 | 15557 | 15563 | | Green | |
| 15553 | 15559 | 15565 | | White | |








## GT-553 *(250mm Sphere)*
## GT-554 *(300mm Sphere)*

*Single Sphere on Post 950mm*







| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-553 | GT-554 | | | |
| 15578 | 15584 | | Beige | 1xE27 |
| 15579 | 15585 | | Black | |
| 15580 | 15586 | | Burgundy | |
| 15581 | 15587 | | Green | |
| 15583 | 15589 | | White | |

## GT-567 *(250mm Sphere)*
## GT-568 *(300mm Sphere)*

*Twin Sphere on Post 1.1m*




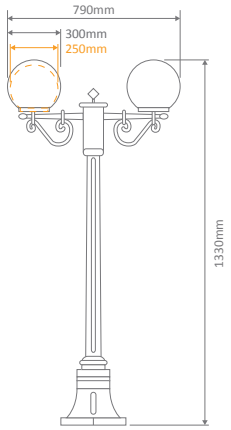


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-567 | GT-568 | | | |
| 15638 | 15644 | | Beige | 2xE27 |
| 15639 | 15645 | | Black | |
| 15640 | 15646 | | Burgundy | |
| 15641 | 15647 | | Green | |
| 15643 | 15649 | | White | |

## GT-555 *(250mm Sphere)*
## GT-556 *(300mm Sphere)*
*Single Sphere on Post 1.6m*







| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-555 | GT-556 | | | |
| 15590 | 15596 | | Beige | 1xE27 |
| 15591 | 15597 | | Black | |
| 15592 | 15598 | | Burgundy | |
| 15593 | 15599 | | Green | |
| 15595 | 15601 | | White | |

## GT-569 *(250mm Sphere)*
## GT-570 *(300mm Sphere)*
*Twin Sphere on Post 1.75m*



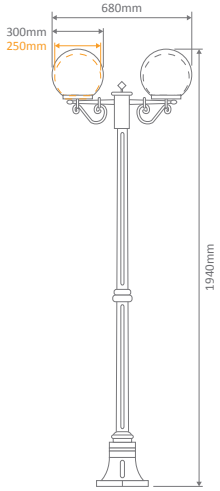


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-569 | GT-570 | | | |
| 15650 | 15656 | | Beige | 2xE27 |
| 15651 | 15657 | | Black | |
| 15652 | 15658 | | Burgundy | |
| 15653 | 15659 | | Green | |
| 15655 | 15661 | | White | |








## GT-557 *(250mm Sphere)*
## GT-558 *(300mm Sphere)*
*Single Sphere on Post 1.96m*







| Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-557 | GT-558 | | | |
| 15602 | 15608 | | Beige | E27 |
| 15603 | 15609 | | Black | |
| 15604 | 15610 | | Burgundy | |
| 15605 | 15611 | | Green | |
| 15607 | 15613 | | White | |

**GT-562** *(250mm Sphere)*
**GT-563** *(300mm Sphere)*
*Triple Spheres on Post 2.1m*



**GT-560** *(250mm Sphere)*
**GT-561** *(300mm Sphere)*
*Twin Spheres on Post 2.1m*



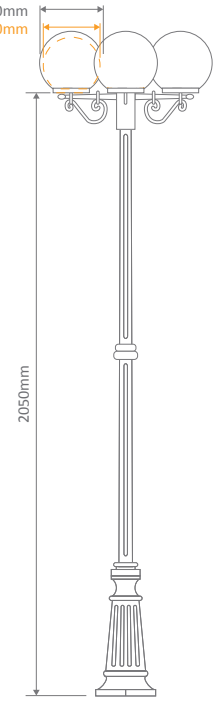


**Width per model:**
*Double Head* - 730mm
*Triple Head* - 700mm

| Item No & Variant | | | | Colour | | Globe |
|---|---|---|---|---|---|---|
| GT-560 | GT-561 | GT-562 | GT-563 | | | |
| 15614 | 15620 | 15626 | 15632 | | Beige | E27* |
| 15615 | 15621 | 15627 | 15633 | | Black | |
| 15616 | 15622 | 15628 | 15634 | | Burgundy | |
| 15617 | 15623 | 15629 | 15635 | | Green | |
| 15619 | 15625 | 15631 | 15637 | | White | |

**The amount of globes needed will depend on the quantity of heads.*






## Vienna

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

**GT-671 Wall Bracket**
*Straight Arm Facing Up*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15884 | | Beige | 1xB22 |
| 15885 | | Black | |
| 15886 | | Burgundy | |
| 15887 | | Green | |
| 15889 | | White | |

**GT-672 Wall Bracket**
*Straight Arm Facing Down*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15890 | | Beige | 1xB22 |
| 15891 | | Black | |
| 15892 | | Burgundy | |
| 15893 | | Green | |
| 15895 | | White | |




Traditional Exterior

## GT-1031 Wall Bracket
*Curved Arm Facing Up*







| Variant | Colour | Globe |
|---|---|---|
| 15956 | Beige | 1xB22 |
| 15957 | Black | |
| 15958 | Burgundy | |
| 15959 | Green | |
| 15961 | White | |

## GT-1032 Wall Bracket
*Curved Arm Facing Down*







| Variant | Colour | Globe |
|---|---|---|
| 15962 | Beige | 1xB22 |
| 15963 | Black | |
| 15964 | Burgundy | |
| 15965 | Green | |
| 15967 | White | |

## GT-670 Single Pendant






| Variant | Colour | Globe |
|---|---|---|
| 15878 | Beige | 1xB22 |
| 15879 | Black | |
| 15880 | Burgundy | |
| 15881 | Green | |
| 15883 | White | |








## GT-673 Pillar Mount







| Variant | Colour | Globe |
|---|---|---|
| 15896 | Beige | 1xB22 |
| 15897 | Black | |
| 15898 | Burgundy | |
| 15899 | Green | |
| 15901 | White | |

## GT-689 Post Top







| Variant | Colour | Globe |
|---|---|---|
| 15950 | Beige | 1xB22 |
| 15951 | Black | |
| 15952 | Burgundy | |
| 15953 | Green | |
| 15955 | White | |

## GT-674 Single Head Post on 1.31m







| Variant | Colour | | Globe |
|---|---|---|---|
| 15902 | | Beige | 1xB22 |
| 15903 | | Black | |
| 15904 | | Burgundy | |
| 15905 | | Green | |
| 15907 | | White | |

## GT-675 Twin Head on Post 1.46m



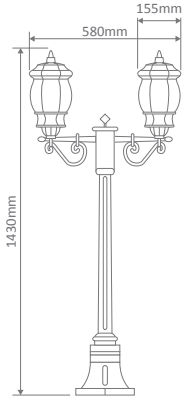


| Variant | Colour | | Globe |
|---|---|---|---|
| 15908 | | Beige | 2xB22 |
| 15909 | | Black | |
| 15910 | | Burgundy | |
| 15911 | | Green | |
| 15913 | | White | |








## GT-676 Single Head on Post 1.93m







| Variant | Colour | | Globe |
|---|---|---|---|
| 15914 | | Beige | 1xB22 |
| 15915 | | Black | |
| 15916 | | Burgundy | |
| 15917 | | Green | |
| 15919 | | White | |

## GT-677 Double Head on Post 2.08m




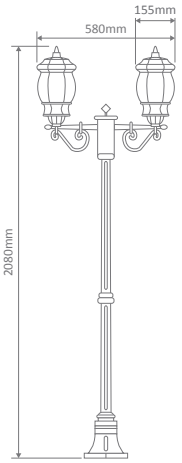


| Variant | Colour | | Globe |
|---|---|---|---|
| 15920 | | Beige | 2xB22 |
| 15921 | | Black | |
| 15922 | | Burgundy | |
| 15923 | | Green | |
| 15925 | | White | |

## GT-678 Single Head on Post 2.3m







| Variant | Colour | | Globe |
|---|---|---|---|
| 15926 | | Beige | 1xB22 |
| 15927 | | Black | |
| 15928 | | Burgundy | |
| 15929 | | Green | |
| 15931 | | White | |

## GT-680 Twin Head on Post 2.44m



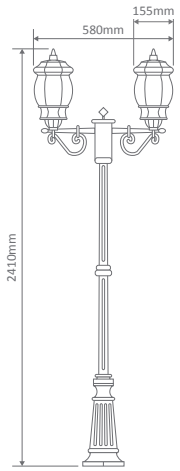


| Variant | Colour | | Globe |
|---|---|---|---|
| 15932 | | Beige | 2xB22 |
| 15933 | | Black | |
| 15934 | | Burgundy | |
| 15935 | | Green | |
| 15937 | | White | |








## GT-682 Triple Head on Post 2.44m




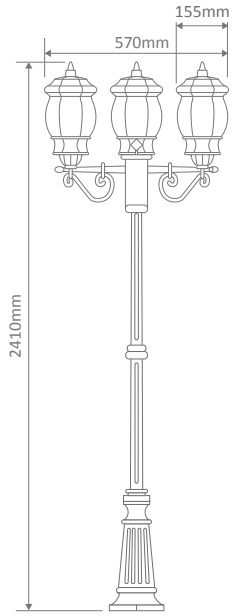


| Variant | Colour | | Globe |
|---|---|---|---|
| 15938 | | Beige | 3xB22 |
| 15939 | | Black | |
| 15940 | | Burgundy | |
| 15941 | | Green | |
| 15943 | | White | |

## GT-1044 Twin Curved Arm Head on Post 2.35m




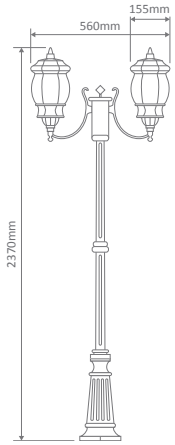


| Variant | Colour | Globe |
|---|---|---|
| 15968 | Beige | 2xB22 |
| 15969 | Black | |
| 15970 | Burgundy | |
| 15971 | Green | |
| 15973 | White | |

## GT-1045 Triple Curved Arm Head on Post 2.35m



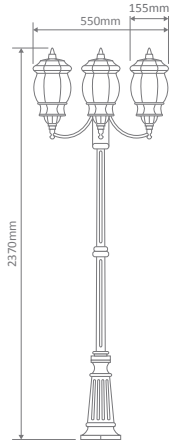


| Variant | Colour | Globe |
|---|---|---|
| 15974 | Beige | 3xB22 |
| 15975 | Black | |
| 15976 | Burgundy | |
| 15977 | Green | |
| 15979 | White | |








## Vienna Large Series

Voltage 240V · IP Rating 23 · Replacement 12 month Warranty · Made In Italy · Assembled in AUS

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

### GT-691 Large Wall Bracket







| Variant | Colour | Globe |
|---|---|---|
| 15986 | Beige | 1xB22 |
| 15987 | Black | |
| 15988 | Burgundy | |
| 15989 | Green | |
| 15991 | White | |

### GT-692 Large Wall Bracket







| Variant | Colour | Globe |
|---|---|---|
| 15992 | Beige | 1xB22 |
| 15993 | Black | |
| 15994 | Burgundy | |
| 15995 | Green | |
| 15997 | White | |

## GT-694 *Large Wall Bracket Curved Arm Facing Up*







| Variant | Colour | Globe |
|---|---|---|
| 16123 | Beige | 1xB22 |
| 16124 | Black | |
| 16125 | Burgundy | |
| 16126 | Green | |
| 16127 | White | |

## GT-695 *Large Wall Bracket Curved Arm Facing Down*






| Variant | Colour | Globe |
|---|---|---|
| 16128 | Beige | 1xB22 |
| 16129 | Black | |
| 16130 | Burgundy | |
| 16131 | Green | |
| 16132 | White | |












## GT-693 Large Pillar Mount




| Variant | Colour | Globe |
|---|---|---|
| 15998 | Beige | 1xB22 |
| 15999 | Black | |
| 16000 | Burgundy | |
| 16001 | Green | |
| 16003 | White | |


## GT-690 Large Pendant

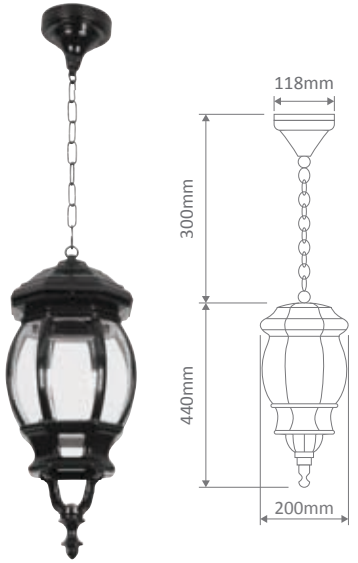


| Variant | Colour | Globe |
|---|---|---|
| 15980 | Beige | 1xB22 |
| 15981 | Black | |
| 15982 | Burgundy | |
| 15983 | Green | |
| 15985 | White | |

## GT-696 Large Post Top







| Variant | Colour | Globe |
|---|---|---|
| 16004 | Beige | 1xB22 |
| 16005 | Black | |
| 16006 | Burgundy | |
| 16007 | Green | |
| 16009 | White | |

## GT-698 Large Single Head on Post 2.4m






| Variant | Colour | | Globe |
|---|---|---|---|
| 16010 | | Beige | 1xB22 |
| 16011 | | Black | |
| 16012 | | Burgundy | |
| 16013 | | Green | |
| 16015 | | White | |








## Chester Series

Voltage 240V · IP Rating 43 · Replacement 12 month Warranty · Made In Italy · Assembled in AUS

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

### GT-131 Wall Bracket
*Straight Arm Facing Up*







| Variant | Colour | | Globe |
|---|---|---|---|
| 14972 | | Beige | 1xB22 |
| 14973 | | Black | |
| 14974 | | Burgundy | |
| 14975 | | Green | |
| 14977 | | White | |

### GT-132 Wall Bracket
*Straight Arm Facing Down*







| Variant | Colour | | Globe |
|---|---|---|---|
| 14978 | | Beige | 1xB22 |
| 14979 | | Black | |
| 14980 | | Burgundy | |
| 14981 | | Green | |
| 14983 | | White | |

## GT-1073 Wall Bracket

*Curved Arm Facing Up*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15038 | | Beige | 1xB22 |
| 15039 | | Black | |
| 15040 | | Burgundy | |
| 15041 | | Green | |
| 15043 | | White | |

## GT-1074 Wall Bracket

*Curved Arm Facing Down*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15044 | | Beige | 1xB22 |
| 15045 | | Black | |
| 15046 | | Burgundy | |
| 15047 | | Green | |
| 15049 | | White | |

## GT-133 Pillar Mount






| Variant | Colour | | Globe |
|---|---|---|---|
| 14984 | | Beige | 1xB22 |
| 14985 | | Black | |
| 14986 | | Burgundy | |
| 14987 | | Green | |
| 14989 | | White | |












## GT-149 Post Top







| Variant | Colour | | Globe |
|---|---|---|---|
| 15032 | | Beige | 1xB22 |
| 15033 | | Black | |
| 15034 | | Burgundy | |
| 15035 | | Green | |
| 15037 | | White | |

## GT-130 Pendant







| Variant | Colour | | Globe |
|---|---|---|---|
| 14966 | | Beige | 1xB22 |
| 14967 | | Black | |
| 14968 | | Burgundy | |
| 14969 | | Green | |
| 14971 | | White | |

## GT-134 Single Head on Post 1.32m







| Variant | Colour | | Globe |
|---|---|---|---|
| 14990 | | Beige | 1xB22 |
| 14991 | | Black | |
| 14992 | | Burgundy | |
| 14993 | | Green | |
| 14995 | | White | |

## GT-135 Twin Head on Post 1.49m



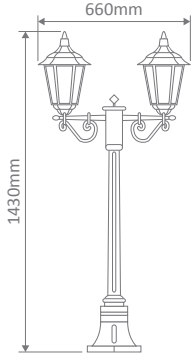


| Variant | Colour | | Globe |
|---|---|---|---|
| 14996 | | Beige | 2xB22 |
| 14997 | | Black | |
| 14998 | | Burgundy | |
| 14999 | | Green | |
| 15001 | | White | |








## GT-136 *Single Head on Post 1.96m*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15002 | | Beige | 1xB22 |
| 15003 | | Black | |
| 15004 | | Burgundy | |
| 15005 | | Green | |
| 15007 | | White | |

## GT-137 *Twin Head on Post 2.11m*




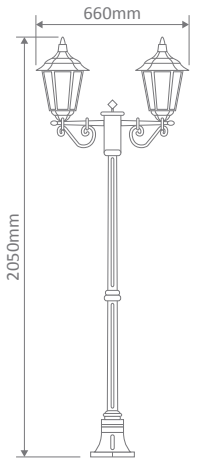


| Variant | Colour | | Globe |
|---|---|---|---|
| 15008 | | Beige | 2xB22 |
| 15009 | | Black | |
| 15010 | | Burgundy | |
| 15011 | | Green | |
| 15013 | | White | |

## GT-138 *Single Head on Post 2.37m*






| Variant | Colour | | Globe |
|---|---|---|---|
| 15014 | | Beige | 1xB22 |
| 15015 | | Black | |
| 15016 | | Burgundy | |
| 15017 | | Green | |
| 15019 | | White | |










## GT-142 *Triple Head on Post 2.47m*



## GT-140 *Twin Head on Post 2.47m*



**Width per model:**
*Double Head* - 660mm
*Triple Head* - 630mm

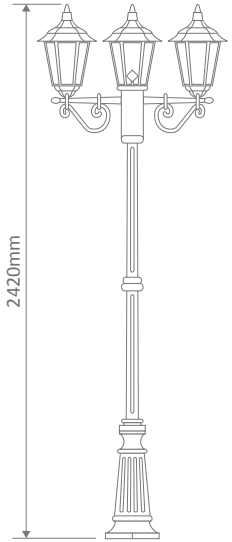


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-140 | GT-142 | | | |
| 15020 | 15026 | | Beige | B22* |
| 15021 | 15027 | | Black | |
| 15022 | 15028 | | Burgundy | |
| 15023 | 15029 | | Green | |
| 15025 | 15031 | | White | |

**The amount of globes needed will depend on the quantity of heads.*


**GT-1078** *Triple Curved Arm Head on Post 2.4m*



**GT-1077** *Twin Curved Arm Head on Post 2.4m*



**Width per model:**
*Double Head* - 630mm
*Triple Head* - 590mm

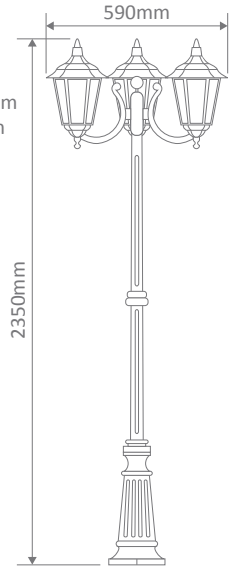


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-1077 | GT-1078 | | | |
| 15050 | 15056 | | Beige | B22* |
| 15051 | 15057 | | Black | |
| 15052 | 15058 | | Burgundy | |
| 15053 | 15059 | | Green | |
| 15055 | 15061 | | White | |

**The amount of globes needed will depend on the quantity of heads.*






## Chester Large Series

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

**GT-161** *Large Up Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15062 | | Beige | 1xB22 |
| 15063 | | Black | |
| 15064 | | Burgundy | |
| 15065 | | Green | |
| 15067 | | White | |

**GT-162** *Large Down Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15068 | | Beige | 1xB22 |
| 15069 | | Black | |
| 15070 | | Burgundy | |
| 15071 | | Green | |
| 15073 | | White | |




Traditional Exterior

## GT-171 *Large Wall Bracket Curved Arm Facing Up*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15098 | | Beige | 1xB22 |
| 15099 | | Black | |
| 15100 | | Burgundy | |
| 15101 | | Green | |
| 15102 | | White | |

## GT-172 *Large Wall Bracket Curved Arm Facing Down*






| Variant | Colour | | Globe |
|---|---|---|---|
| 15103 | | Beige | 1xB22 |
| 15104 | | Black | |
| 15105 | | Burgundy | |
| 15106 | | Green | |
| 15107 | | White | |












## GT-163 *Large Pillar Mount*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15074 | | Beige | 1xB22 |
| 15075 | | Black | |
| 15076 | | Burgundy | |
| 15077 | | Green | |
| 15079 | | White | |

## GT-166 *Large Post Top*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15086 | | Beige | 1xB22 |
| 15087 | | Black | |
| 15088 | | Burgundy | |
| 15089 | | Green | |
| 15091 | | White | |

## GT-165 *Large Pendant*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15080 | | Beige | 1xB22 |
| 15081 | | Black | |
| 15082 | | Burgundy | |
| 15083 | | Green | |
| 15085 | | White | |

## GT-168 *Single Head Post 2.45m*






| Variant | Colour | | Globe |
|---|---|---|---|
| 15092 | | Beige | 1xB22 |
| 15093 | | Black | |
| 15094 | | Burgundy | |
| 15095 | | Green | |
| 15097 | | White | |








## Paris Series

Voltage 240V · IP Rating 43 · Replacement 12 month Warranty · Made In Italy · Assembled in AUS

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

### GT-231 *Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15116 | | Beige | 1xB22 |
| 15117 | | Black | |
| 15118 | | Burgundy | |
| 15119 | | Green | |
| 15121 | | White | |

### GT-232 *Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15122 | | Beige | 1xB22 |
| 15123 | | Black | |
| 15124 | | Burgundy | |
| 15125 | | Green | |
| 15127 | | White | |

## GT-233 *Pillar Mount*







| Variant | Colour | Globe |
|---|---|---|
| 15128 | Beige | 1xB22 |
| 15129 | Black | |
| 15130 | Burgundy | |
| 15131 | Green | |
| 15133 | White | |

## GT-249 *Post Top*







| Variant | Colour | Globe |
|---|---|---|
| 15182 | Beige | 1xB22 |
| 15183 | Black | |
| 15184 | Burgundy | |
| 15185 | Green | |
| 15187 | White | |

## GT-230 *Pendant*






| Variant | Colour | Globe |
|---|---|---|
| 15110 | Beige | 1xB22 |
| 15111 | Black | |
| 15112 | Burgundy | |
| 15113 | Green | |
| 15115 | White | |












## GT-245 Wall Mounted







| Variant | Colour | Globe |
|---|---|---|
| 15176 | Beige | 1xE27 |
| 15177 | Black | |
| 15178 | Burgundy | |
| 15179 | Green | |
| 15181 | White | |

## GT-234 Single Head on Post 1.31m







| Variant | Colour | Globe |
|---|---|---|
| 15134 | Beige | 1xB22 |
| 15135 | Black | |
| 15136 | Burgundy | |
| 15137 | Green | |
| 15139 | White | |

## GT-235 Twin Head on Post 1.46m




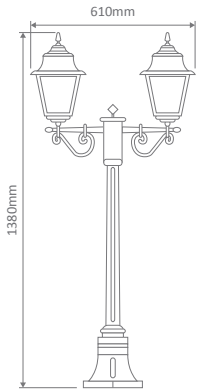


| Variant | Colour | | Globe |
|---|---|---|---|
| 15140 | | Beige | 2xB22 |
| 15141 | | Black | |
| 15142 | | Burgundy | |
| 15143 | | Green | |
| 15145 | | White | |

## GT-236 Single Head on Post 1.94m






| Variant | Colour | | Globe |
|---|---|---|---|
| 15146 | | Beige | 1xB22 |
| 15147 | | Black | |
| 15148 | | Burgundy | |
| 15149 | | Green | |
| 15151 | | White | |








## GT-237 *Twin Head on Post 2.09m*




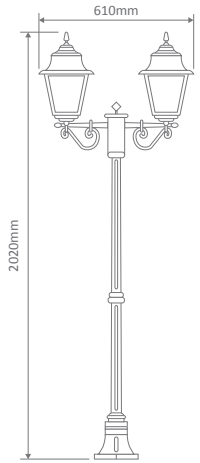


| Variant | Colour | | Globe |
|---|---|---|---|
| 15152 | | Beige | 2xB22 |
| 15153 | | Black | |
| 15154 | | Burgundy | |
| 15155 | | Green | |
| 15157 | | White | |

## GT-238 *Single Head on Post 2.3m*






| Variant | Colour | | Globe |
|---|---|---|---|
| 15158 | | Beige | 1xB22 |
| 15159 | | Black | |
| 15160 | | Burgundy | |
| 15161 | | Green | |
| 15163 | | White | |


## GT-242 *Triple Head on Post 2.45m*



## GT-240 *Twin Head on Post 2.45m*



**Width per model:**
*Double Head* - 610mm
*Triple Head* - 590mm

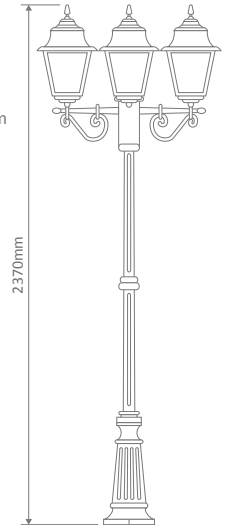


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-240 | GT-242 | | | |
| 15164 | 15170 | | Beige | B22* |
| 15165 | 15171 | | Black | |
| 15166 | 15172 | | Burgundy | |
| 15167 | 15173 | | Green | |
| 15169 | 15175 | | White | |

**The amount of globes needed will depend on the quantity of heads.*








## Avignon Series

Voltage 240V · IP Rating 43 · Replacement 12 month Warranty · Made In Italy · Assembled in AUS

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

### GT-271 *Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15194 | | Beige | 1xB22 |
| 15195 | | Black | |
| 15196 | | Burgundy | |
| 15197 | | Green | |
| 15199 | | White | |

### GT-272 *Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15200 | | Beige | 1xB22 |
| 15201 | | Black | |
| 15202 | | Burgundy | |
| 15203 | | Green | |
| 15205 | | White | |

## GT-273 *Pillar Mount*







| Variant | Colour | Globe |
|---|---|---|
| 15206 | Beige | 1xB22 |
| 15207 | Black | |
| 15208 | Burgundy | |
| 15209 | Green | |
| 15211 | White | |

## GT-289 *Post Top*







| Variant | Colour | Globe |
|---|---|---|
| 15254 | Beige | 1xB22 |
| 15255 | Black | |
| 15256 | Burgundy | |
| 15257 | Green | |
| 15259 | White | |

## GT-270 *Pendant*






| Variant | Colour | Globe |
|---|---|---|
| 15188 | Beige | 1xB22 |
| 15189 | Black | |
| 15190 | Burgundy | |
| 15191 | Green | |
| 15193 | White | |








## GT-274 *Single Head on Post 1.25m*







| Variant | Colour | Globe |
|---|---|---|
| 15212 | Beige | 1xB22 |
| 15213 | Black | |
| 15214 | Burgundy | |
| 15215 | Green | |
| 15217 | White | |

## GT-275 *Twin Head on Post 1.4m*







| Variant | Colour | Globe |
|---|---|---|
| 15218 | Beige | 2xB22 |
| 15219 | Black | |
| 15220 | Burgundy | |
| 15221 | Green | |
| 15223 | White | |

## GT-276 *Single Head on Post 1.9m*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15224 | | Beige | 1xB22 |
| 15225 | | Black | |
| 15226 | | Burgundy | |
| 15227 | | Green | |
| 15229 | | White | |

## GT-277 *Twin Head on Post 2.05m*



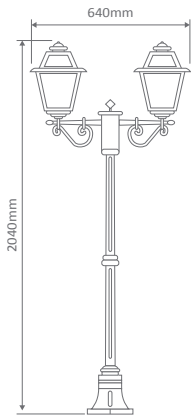


| Variant | Colour | | Globe |
|---|---|---|---|
| 15230 | | Beige | 2xB22 |
| 15231 | | Black | |
| 15232 | | Burgundy | |
| 15233 | | Green | |
| 15235 | | White | |








## GT-278 *Single Head on Post 2.26m*






| Variant | Colour | | Globe |
|---|---|---|---|
| 15236 | | Beige | 1xB22 |
| 15237 | | Black | |
| 15238 | | Burgundy | |
| 15239 | | Green | |
| 15241 | | White | |


## GT-282 *Triple Head on Post 2.4m*



## GT-280 *Twin Head on Post 2.4m*



**Width per model:**
*Double Head* - 640mm
*Triple Head* - 620mm

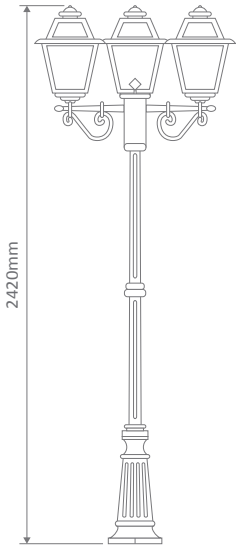


| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-280 | GT-282 | | | |
| 15242 | 15248 | | Beige | B22* |
| 15243 | 15249 | | Black | |
| 15244 | 15250 | | Burgundy | |
| 15245 | 15251 | | Green | |
| 15247 | 15253 | | White | |

**The amount of globes needed will depend on the quantity of heads.*






## Turin Series

Voltage 240V · IP Rating 43 · Replacement 12 month Warranty · Made In Italy · Assembled in AUS

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.
- Made-To-Order. Production lead times apply.

## GT-421 *Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15416 | | Beige | 1xB22 |
| 15417 | | Black | |
| 15418 | | Burgundy | |
| 15419 | | Green | |
| 15421 | | White | |

## GT-422 *Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15422 | | Beige | 1xB22 |
| 15423 | | Black | |
| 15424 | | Burgundy | |
| 15425 | | Green | |
| 15427 | | White | |




Traditional Exterior

## GT-423 *Pillar Mount*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15428 | | Beige | 1xB22 |
| 15429 | | Black | |
| 15430 | | Burgundy | |
| 15431 | | Green | |
| 15433 | | White | |

## GT-439 *Post Top*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15476 | | Beige | 1xB22 |
| 15477 | | Black | |
| 15478 | | Burgundy | |
| 15479 | | Green | |
| 15481 | | White | |

## GT-420 *Pendant*






| Variant | Colour | | Globe |
|---|---|---|---|
| 15410 | | Beige | 1xB22 |
| 15411 | | Black | |
| 15412 | | Burgundy | |
| 15413 | | Green | |
| 15415 | | White | |








## GT-424 *Single Head on Post 1.32m*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15434 | | Beige | 1xB22 |
| 15435 | | Black | |
| 15436 | | Burgundy | |
| 15437 | | Green | |
| 15439 | | White | |

## GT-425 *Twin Head on Post 1.49m*




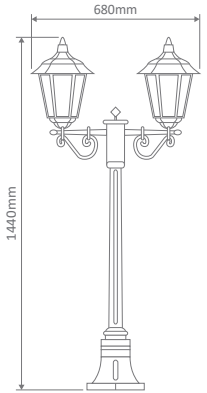


| Variant | Colour | | Globe |
|---|---|---|---|
| 15440 | | Beige | 2xB22 |
| 15441 | | Black | |
| 15442 | | Burgundy | |
| 15443 | | Green | |
| 15445 | | White | |

## GT-426 *Single Head on Post 1.96m*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15446 | | Beige | 1xB22 |
| 15447 | | Black | |
| 15448 | | Burgundy | |
| 15449 | | Green | |
| 15451 | | White | |

## GT-427 *Twin Head on Post 2.11m*



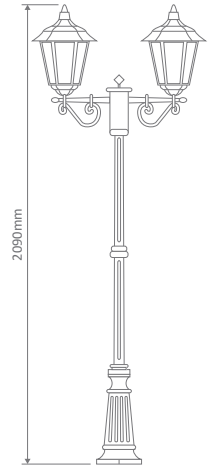


| Variant | Colour | | Globe |
|---|---|---|---|
| 15452 | | Beige | 2xB22 |
| 15453 | | Black | |
| 15454 | | Burgundy | |
| 15455 | | Green | |
| 15457 | | White | |








## GT-428 *Single Head on Post 2.37m*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15458 | | Beige | 1xB22 |
| 15459 | | Black | |
| 15460 | | Burgundy | |
| 15461 | | Green | |
| 15463 | | White | |

## GT-432 *Triple Head on Post 2.4m*



## GT-430 *Twin Head on Post 2.47m*



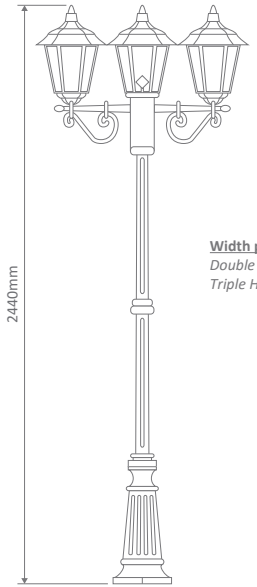


**Width per model:**
*Double Head* - 680mm
*Triple Head* - 660mm

| Item No & Variant | | Colour | | Globe |
|---|---|---|---|---|
| GT-430 | GT-432 | | | |
| 15464 | 15470 | | Beige | B22* |
| 15465 | 15471 | | Black | |
| 15466 | 15472 | | Burgundy | |
| 15467 | 15473 | | Green | |
| 15469 | 15475 | | White | |

**The amount of globes needed will depend on the quantity of heads.*












# Turin Large Series

Voltage 240V · IP Rating 43 · Replacement 12 month Warranty · Made In Italy · Assembled in AUS

- Cast Aluminium, powder coated.
- Polycarbonate Diffuser.

## GT-481 *Large Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15482 | | Beige | 1xB22 |
| 15483 | | Black | |
| 15484 | | Burgundy | |
| 15485 | | Green | |
| 15487 | | White | |

## GT-482 *Large Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15488 | | Beige | 1xB22 |
| 15489 | | Black | |
| 15490 | | Burgundy | |
| 15491 | | Green | |
| 15493 | | White | |

## GT-491 *Large Up Curved Wall Bracket*







| Variant | Colour | | Globe |
|---|---|---|---|
| 16133 | | Beige | 1xB22 |
| 16134 | | Black | |
| 16135 | | Burgundy | |
| 16136 | | Green | |
| 16137 | | White | |

## GT-492 *Up Large Curved Wall Bracket*






| Variant | Colour | | Globe |
|---|---|---|---|
| 16138 | | Beige | 1xB22 |
| 16139 | | Black | |
| 16140 | | Burgundy | |
| 16141 | | Green | |
| 16142 | | White | |








## GT-483 *Large Pillar Mount*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15494 | | Beige | 1xB22 |
| 15495 | | Black | |
| 15496 | | Burgundy | |
| 15497 | | Green | |
| 15499 | | White | |

## GT-486 *Large Post Top*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15506 | | Beige | 1xB22 |
| 15507 | | Black | |
| 15508 | | Burgundy | |
| 15509 | | Green | |
| 15511 | | White | |

## GT-485 *Large Pendant*







| Variant | Colour | | Globe |
|---|---|---|---|
| 15500 | | Beige | 1xB22 |
| 15501 | | Black | |
| 15502 | | Burgundy | |
| 15503 | | Green | |
| 15505 | | White | |

## GT-488 *Single Head on Post 2.45m*



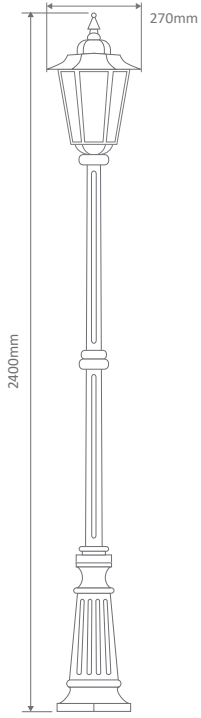


| Variant | Colour | | Globe |
|---|---|---|---|
| 15512 | | Beige | 1xB22 |
| 15513 | | Black | |
| 15514 | | Burgundy | |
| 15515 | | Green | |
| 15517 | | White | |







## Mounting Adaptors




**GTA-95**
*CTC Bracket*



**GTA-96**
*Pillar Mount Base*







**GTA-832**
*Base & Adaptor Plate*



**GTA-833**
*Base*




| Item No & Variant | | | | Colour | |
|---|---|---|---|---|---|
| GTA-95 | GTA-96 | GTA-832 | GTA-833 | | |
| 16075 | 16081 | 16063 | 16144 | | Beige |
| 16076 | 16082 | 16064 | 16145 | | Black |
| 16077 | 16083 | 16065 | 16146 | | Burgundy |
| 16078 | 16084 | 16066 | 16147 | | Green |
| 16080 | 16086 | 16068 | 16148 | | White |

## Post Top Adaptors



**GTA-140** *43mm*



**GTA-141** *50mm*



**GTA-142** *60mm*




**GTA-150, 151, 152**
**(76mm, 80mm, 82mm)**

| Item No & Variant | | | | | | Colour | |
|---|---|---|---|---|---|---|---|
| GTA-140 | GTA-141 | GTA-142 | GTA-150 | GTA-151 | GTA-152 | | |
| 16021 | 16027 | 16033 | 16103 | 16113 | 16119 | | Beige |
| 16022 | 16028 | 16034 | 16104 | 16114 | 16120 | | Black |
| 16023 | 16029 | 16035 | 16105 | 16115 | 16121 | | Burgundy |
| 16024 | 16030 | 16036 | 16106 | 16116 | 16122 | | Green |
| 16026 | 16032 | 16038 | 16102 | 16112 | 16118 | | White |




**GTA-72**
*Monaco Series Diffuser Ring*







**GTA-652**
*Monaco Series Diffuser Only*






**GTA-94**
*Thread Adaptor Plate*




| Item No & Variant | | | Colour | |
|---|---|---|---|---|
| GTA-72 | GTA-652 | GTA-94 | | |
| N/A | N/A | 16069 | | Beige |
| 16089 | N/A | 16070 | | Black |
| N/A | N/A | 16071 | | Burgundy |
| N/A | N/A | 16072 | | Green |
| N/A | N/A | 16074 | | White |
| | 16098 | | | Clear |







Replacement 12 month Warranty

Made in Italy




**GTA-222**
*95cm Post*


**GTA-221**
*1.57m Post*

**GTA-220**
*1.93m Post*

| Item No & Variant | | | Colour | |
|---|---|---|---|---|
| GTA-220 | GTA-221 | GTA-222 | | |
| 16039 | 16045 | 16051 | | Beige |
| 16040 | 16046 | 16052 | | Black |
| 16041 | 16047 | 16053 | | Burgundy |
| 16042 | 16048 | 16054 | | Green |
| 16044 | 16050 | 16056 | | White |
| N/A | N/A | N/A | | Clear |




***GTA-222-221***
***(Base)***





***GTA-220***
***(Base)***



**GTA-335**
*Exterior Arm*



**GTA-98**
*Cap to Suit 60mm Post*





| Item No & Variant | | Colour | |
|---|---|---|---|
| GTA-335 | GTA-98 | | |
| 16057 | N/A | | Beige |
| 16058 | 16087 | | Black |
| 16059 | N/A | | Burgundy |
| 16060 | N/A | | Green |
| 16062 | 16088 | | White |

## WP-12V Series

- 12V DC Constant Voltage.




WP12-10W
WP12-15W







WP12-30W






WP12-60W




| Item No. | Variant | Input Voltage | Output Voltage | Output Wattage | IP Rating |
|---|---|---|---|---|---|
| WP12/10 | 20198 | 200-260V (50/60Hz) | 12V | 1-10W | 67 |
| WP12/15 | 20200 | | | 1.5-15W | |
| WP12/30 | 20201 | | | 3-30W | |
| WP12/60 | 20202 | | | 6-60W | |


*Constant Voltage - Wire in Parallel*








WP12-100W

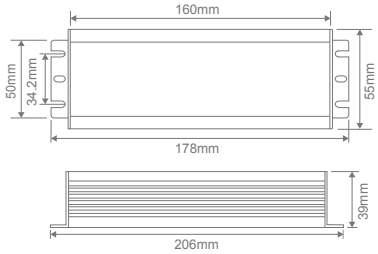





WP12-150W

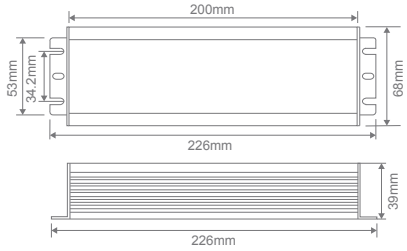




WP12-200W
WP12-250W

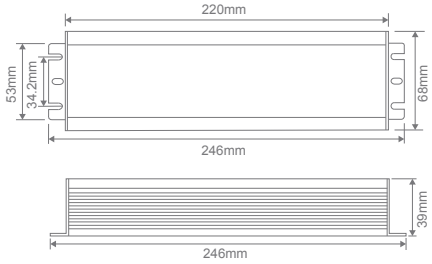


| Item No. | Variant | Input Voltage | Output Voltage | Output Wattage | IP Rating |
|---|---|---|---|---|---|
| WP12/100 | 20203 | 200-260V (50/60Hz) | 12V | 10-100W | 67 |
| WP12/150 | 20204 | | | 15-150W | |
| WP12/200 | 20199 | | | 20-200W | |
| WP12/250 | 20259 | | | 25-250W | |

*Constant Voltage - Wire in parallel*





Power Supplies

## WP-24V Series

- 24V DC Constant Voltage.




WP24-10W
WP24-15W







WP24-30W






WP24-60W




| Item No. | Variant | Input Voltage | Output Voltage | Output Wattage | IP Rating |
|---|---|---|---|---|---|
| WP24/10 | 20249 | 200-260V (50/60Hz) | 24V | 1-10W | 67 |
| WP24/15 | 20250 | | | 1.5-15W | |
| WP24/30 | 20251 | | | 3-30W | |
| WP24/60 | 20252 | | | 6-60W | |


*Constant Voltage - Wire in parallel*








WP24-100W

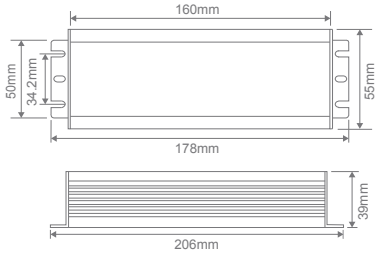





WP24-150W

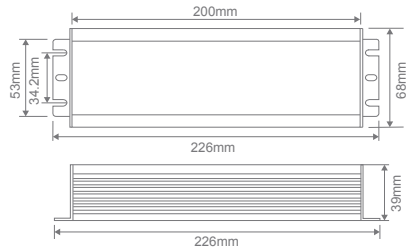




WP24-200W
WP24-250W

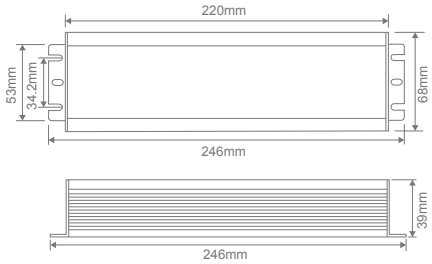


| Item No. | Variant | Input Voltage | Output Voltage | Output Wattage | IP Rating |
|---|---|---|---|---|---|
| WP24/100 | 20253 | 200-260V (50/60Hz) | 24V | 10-100W | 67 |
| WP24/150 | 20254 | | | 15-150W | |
| WP24/200 | 20257 | | | 20-200W | |
| WP24/250 | 20258 | | | 25-250W | |

*Constant Voltage - Wire in parallel*





Power Supplies

## WP-350mA Series

- 350mA Constant Current.



*WP350mA-3*
*WP350mA-10*
*WP350mA-20*




| Item No. | Variant | Input Voltage | Output Voltage | Output Current | Wattage | IP Rating |
|---|---|---|---|---|---|---|
| WP350MA/3 | 20248 | 200-260V AC (50/60Hz) | 7-9V | 350mA | 2.5 -3W | 67 |
| WP350MA/10 | 20255 | | 26-30V | | 9-10W | |
| WP350MA/20 | 20260 | | 40-57V | | 14-20W | |

*Constant Current - Wire in Series*








## WP-700mA Series

- 700mA Constant Current.



*WP700mA-3*
*WP700mA-10*
*WP700mA-20*




| Item No. | Variant | Input Voltage | Output Voltage | Output Current | Wattage | IP Rating |
|---|---|---|---|---|---|---|
| WP700MA/3 | 20393 | 200-260V AC (50/60Hz) | 3-5V | 700mA | 2-3W | 67 |
| WP700MA/10 | 20395 | | 12-15V | | 8.5-10W | |
| WP700MA/20 | 20256 | | 25-30V | | 17.5-20W | |

*Constant Current - Wire in Series*

## Evac D63 Recessed



## Evac D63 Surface Mounted




Emergency Systems




## EVAC Series

IP Rating 20 | AS/NZS2293.3 Compliance | Replacement 4yr Warranty | Classification D63 | Ultra Slim | Overcharge/Discharge Protection | Adjustable Dish 95/145 mm

| | Evac-SM | Evac-REC |
|---|---|---|
| Input Voltage: | 240V AC | |
| Wattage: | 3.5w Power Consumption | |
| CCT: | 4500K | |
| Emergency: | Non- Maintained | |
| Classification: | D63 | |
| Battery: | LiFePO4 (Charge time 24hrs) | |
| Terminal: | Large Terminal, PA16 | Flex and Plug |
| Features: | 180x180x52mm pressed steel, overcharge & discharge protection, polarity reversal protection for battery. | Adjustable dish 95/145mm, depth 34mm, overcharge & discharge protection, polarity reversal protection for battery. |
| Warranty: | 4 Year Warranty including battery | |
| Compliance: | Fully Compliant to AS/NZS2293.3 | |



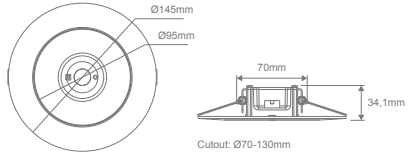
| Item No. | Variants | Wattage | CCT |
|---|---|---|---|
| EVAC-SM-WHT | 66044 | 3.5W | 4500K |
| EVAC-SM-BLK | 66045 | | |

| Item No. | Variants | Wattage | CCT |
|---|---|---|---|
| EVAC-REC-WHT | 66040 | 3.5W | 4500K |
| EVAC-REC-BLK | 66041 | | |

## Exit Surface Mount Series













## Exit Surface Mount Series




| | |
|---|---|
| Input Voltage: | 240V AC |
| Wattage: | 3.5W Power Consumption |
| CCT: | 6000K |
| Emergency: | Maintained / Non- Maintained |
| Battery: | LiFePO4 (Charge time 24hrs) |
| Terminal: | Large Terminal, PA16 |
| Features: | 24m Viewing distance, surface mounted, Easy quick slide installation, all directional inserts included in the box, Overcharge & discharge protection, Polarity reversal protection for battery, wall, ceiling, chain and rod mounting (with Rod Mount Kit) options available. |
| Warranty: | 4 Year Warranty including battery |
| Compliance: | Fully Compliant to AS/NZS2293.3 |

| Item No. | Variants | | Wattage | CCT |
|---|---|---|---|---|
| | Blk | Wht | | |
| EXIT-SM-24 | 66100 | 66101 | 3.5W | 4500K |

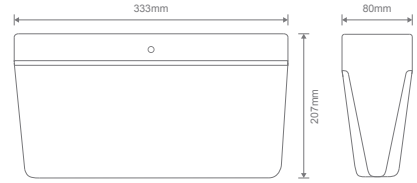


| Accessories | Variants | | IP Rating |
|---|---|---|---|
| Item No. | Wht | Blk | |
| EXIT-WPBOX | 66102 | N/A | IP65 |
| EXIT-SM-ROD-MT-KIT | 66124 | 66125 | N/A |



*EXIT-WPBOX*



*EXIT-SM-ROD-MT-KIT*

## Exit Recessed Mount Series
















## Exit Recessed Mount Series




| | |
|---|---|
| Input Voltage: | 240V AC |
| Wattage: | 4W Power Consumption |
| CCT: | 5000K |
| Emergency: | Maintained / Non- Maintained |
| Battery: | LiFePO4 (Charge time 24hrs) |
| Terminal: | Large Terminal, PA16 |
| Features: | 24m Viewing distance, recessed mounted, all directional inserts included in the box, Overcharge & discharge protection, Polarity reversal protection for battery, Flex and Plug, surface mount box available. |
| Warranty: | 4 Year Warranty including battery |
| Compliance: | Fully Compliant to AS/NZS2293.3 |


| Item No. | Variants | | Wattage | CCT |
|---|---|---|---|---|
| | Blk | Wht | | |
| EXIT-REC-24 | 66104 | 66105 | 4W | 4500K |

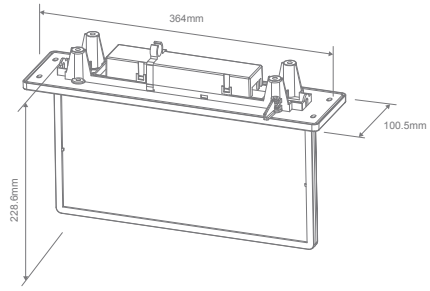


| Add-ons | Variants | |
|---|---|---|
| Item No. | Wht | Blk |
| EXIT-REC-SM-KIT | 66188 | 66189 |
| EXIT-REC-PLATE | 66121 | 66122 |



*EXIT-REC-SM-KIT*

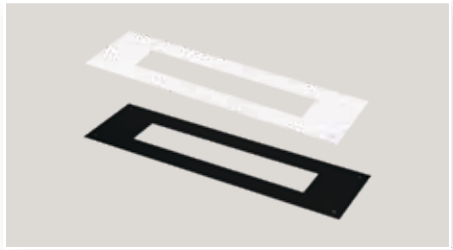

*EXIT-REC-PLATE*


## Evac D40 Mini



AS/NZS2293.3 Compliance · Replacement 5yr Warranty · Classification D40 · IP Rating 20 · Cutout (mm) 25 · Dish Size (mm) 37 · Ultra Slim · Overcharge/Discharge Protection

| | |
|---|---|
| Input Voltage: | 240V AC |
| Wattage: | 1.8W |
| Emergency | Non-Maintained |
| CCT: | 4000K |
| Classification: | D40 |
| LED Type | COB |
| Beam Angle (°) | 120° |
| Emergency Duration: | 3hrs |
| Battery: | LiFePO4 3.2V 3.6Ah |
| Mounting: | Recessed Mounting |
| Warranty: | 5 Year Warranty including battery |
| Compliance: | Fully Compliant to AS/NZS2293.3 |

*EVAC-D40-MINI products are all self test*




| Item No. | Variants | CCT |
|---|---|---|
| EVAC-D40-MINI-WHT | 66047 | 4000K |
| EVAC-D40-MINI-BLK | 66048 | |








## Trak 3 EM D40



AS/NZS2293.3 Compliance · Replacement 5yr Warranty · Classification D40 · IP Rating 20 · Ultra Slim · Overcharge/Discharge Protection · LiFePO4 Lithium Battery

| | |
|---|---|
| Input Voltage: | 240V AC |
| Wattage: | 3W |
| Emergency | Non-Maintained |
| CCT: | 4000K |
| Classification: | D40 |
| LED Type | COB |
| Beam Angle (°) | 120° |
| Emergency Duration: | 3hrs |
| Battery: | LiFePO4 3.2V 3.6Ah |
| Mounting: | 3-Circuit Track |
| Warranty: | 5 Year Warranty including battery |
| Compliance: | Fully Compliant to AS/NZS2293.3 |

*TRAK-3-EM-D40 products are all self test.*

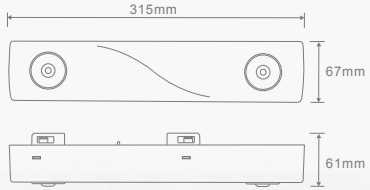


| Item No. | Variants | CCT |
|---|---|---|
| TRAK-3-EM-D40-WHT | 66097 | 4000K |
| TRAK-3-EM-D40-BLK | 66096 | |

# Twin Spot EM










## Twin Spot EM

AS/NZS2293.3 Compliance · IK Rating 08 · IP Rating 65 · Replacement 4yr Warranty · Quick & Easy Installation · Fully Adjustable · Wall · LiFePO4 Li-ion Battery · Overcharge/Discharge Protection

| | |
|---|---|
| Input Voltage: | 240V AC |
| Wattage: | 2.5W/5W |
| Lumens: | (2.5W) White 6500K - 200lm<br>(5W) White 6500K - 400lm |
| IP Rating: | IP65 |
| Frequency: | 60Hz |
| Charge Time: | 24hrs |
| Emergency Time: | 2/3hrs |
| Operation: | Non-Maintained |
| Function: | Manual Test Switch & LED Indicator |
| Working Temperature: | 0-40°C |
| Battery: | LiFePO4 |
| Mounting: | Wall Mounted |
| Warranty: | 4 Year Warranty Including Battery |
| Compliance: | Fully Compliant to AS/NZS2293.3 |

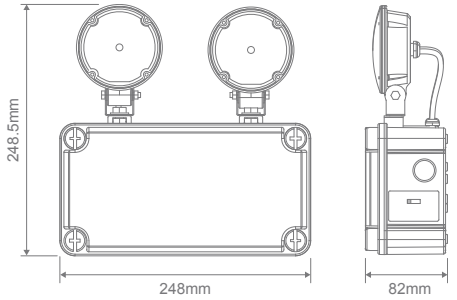


| Item No. | Variants | CCT |
|---|---|---|
| TWIN-SPOT-EM-WHT | 66108 | 6500K |
| TWIN-SPOT-EM-BLK | 66109 | |

## Sunset Series



| Item No. | Variant |
|---|---|
| SUNSET-REM | 66133 |

*Sensor Remote Control (Sold Separately)*



*Note: One remote control will operate unlimited sensors.*





Emergency Systems


Emergency

## Sunset Series

| | |
|---|---|
| Input Voltage: | 240V AC |
| Wattage: | 25W |
| LED | SMD |
| IP Rating | IP54 |
| Class: | Class II (No Earth Required) |
| CRI: | ≥80 |
| Lifespan: | 50,000hrs |
| Dimmable: | No |
| Beam Angle | 120° |
| Emergency Kits: | Built-In |
| Microwave Sensor: | Yes |
| Warranty: | 4 Year Warranty |
| Compliance: | Fully Compliant to AS/NZS2293.3 |

*SUNSET-300-EM is self test*

| Item No. | Variants | CCT | Lumen Output Warm White 3000K | Neutral White 4000K | White 5000K |
|---|---|---|---|---|---|
| SUNSET-300-RND-EM | 66132 | TRIO | 2370lm | 2485lm | 2600lm |
| SUNSET-300-RND-EM-SEN | 66130 | | | | |

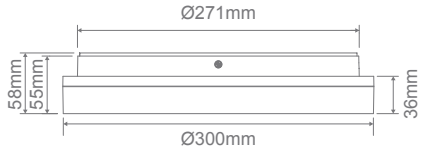


| | |
|---|---|
| Green Indicator | Charge END |
| Yellow Indicator | Battery Charging |
| Red Indicator | Emergency Status |
| Green + Yellow Flashing | Battery Fault |
| Green + Yellow OFF | Battery Over Temp |



*Emergency Test Buttons*

# Park Series

## Emergency Park Light

Designed in Australia · Quick & Easy Installation · Up To 130 Lumens Per Watt · Replacement 5yr Warranty · AS/NZS 2293.3 Compliance · IP Rating 20 · Variable Wattage

## Park-DIFF

## Park-WG

**Accessories** *(Sold Separately)*



*SENSOR-INT-01-ON-OFF*



*SENSOR-INT-01-DIM*

*Note: One remote control will operate unlimited sensors.*




domuslighting.com.au

ESCAPE Emergency Systems DOMUS®

## Park Diffuser Series

| | Park-60 | Park-120 |
|---|---|---|
| Input Voltage: | 240V AC | |
| Wattage: | 7.5W/15W | 15W/30W |
| Emergency: | Maintained / Non- Maintained | |
| Cover: | Prismatic Diffuser with even light output | |
| Battery: | LiFePO4 (Charge time 24hrs) | |
| Terminal: | Large Terminal, PA16 | |
| Features: | 20mm Knockouts for conduit or cable glands. | |
| Options: | ON/OFF and DIMMABLE Internal Sensor available. Remote control required for sensor adjustment. One remote control will operate unlimited sensors. Remote control sold separately. DALI and TRIAC options available. | |
| Warranty: | 5 Year Warranty / 3 Year Warranty on Battery | |
| Compliance: | Fully Compliant to AS/NZS2293.3 | |

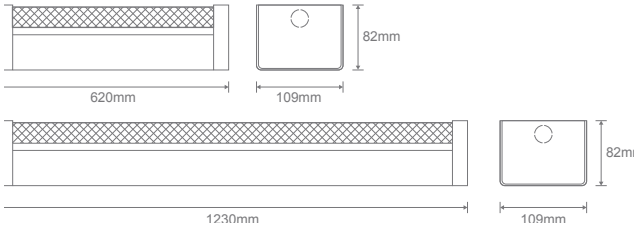


| Item No. | Variants | | CCT | Non-Dim | ON/OFF Sensor | DIM Sensor | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | EM | Standard | | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| PARK-60-DIFF-EM | 66070 | 66050 | TRIO | ● | - | - | 950lm /1800lm | 1000lm /1950lm | 1000lm /1850lm |
| | 66071 | 66051 | | - | ● | - | | | |
| | 66072 | 66052 | | - | - | ● | | | |
| PARK-120-DIFF-EM | 66073 | 66053 | | ● | - | - | 2050lm /3850lm | 2100lm /4050lm | 2050lm /3900lm |
| | 66074 | 66054 | | - | ● | - | | | |
| | 66075 | 66055 | | - | - | ● | | | |








## Park Wire Guard Series

| | Park-60 | Park-120 |
|---|---|---|
| Input Voltage: | 240V AC | |
| Wattage: | 7.5W/15W | 15W/30W |
| Emergency: | Maintained / Non- Maintained | |
| Cover: | Wire Guard with even light output | |
| Battery: | LiFePO4 (Charge time 24hrs) | |
| Terminal: | Large Terminal, PA16 | |
| Features: | 20mm Knockouts for conduit or cable glands. | |
| Options: | ON/OFF and DIMMABLE Internal Sensor available. Remote control required for sensor adjustment. One remote control will operate unlimited sensors. Remote control sold separately. DALI and TRIAC options available. | |
| Warranty: | 5 Year Warranty / 3 Year Warranty on Battery | |
| Compliance: | Fully Compliant to AS/NZS2293.3 | |

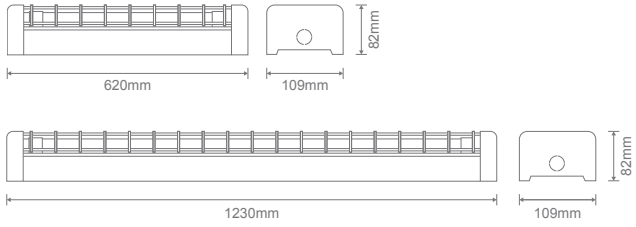


| Item No. | Variants | | CCT | Non-Dim | ON/OFF Sensor | DIM Sensor | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | EM | Standard | | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| PARK-60-WG-EM | 66080 | 66060 | TRIO | ● | - | - | 850lm /1580lm | 900lm /1700lm | 900lm /1650lm |
| | 66081 | 66061 | | - | ● | - | | | |
| | 66082 | 66062 | | - | - | ● | | | |
| PARK-120-WG-EM | 66083 | 66063 | | ● | - | - | 1800lm /3400lm | 1800lm /3550lm | 1800lm /3450lm |
| | 66084 | 66064 | | - | ● | - | | | |
| | 66085 | 66065 | | - | - | ● | | | |

## Hydro Series




**Accessories** *(Sold Separately)*



*SENSOR-INT-01-ON-OFF*



*SENSOR-INT-01-DIM*

*Note: One remote control will operate unlimited sensors.*












## Hydro Weatherproof Series




| | Hydro-60 | Hydro-120 |
|---|---|---|
| Input Voltage: | 240V AC | |
| Wattage: | 7.5W/15W | 15W/30W |
| IP Rating: | IP65 | |
| Emergency: | Maintained/Non-Maintained | |
| LED Type | SMD | |
| Battery: | LiFePO4 (Charge time 24hrs) | |
| CRI: | ≥80 | |
| Beam Angle (°) | 120° | |
| Cover: | Opal Diffuser with even light output | |
| Terminal: | Large Terminal, PA16 | |
| Inclusion: | S/Steel clips fitted with poly carb clips in the box as an option, pre-drilled side cable entry with rubber seal, Finger holes for easy removal of gear tray when installing, good quality polycarbonate material (not cheap recyclable material). | |
| Options: | ON/OFF and DIMMABLE Internal Sensor available. Remote control required for sensor adjustment. One remote control will operate unlimited sensors. Remote control sold separately. DALI and TRIAC options available. | |
| Warranty: | 5 Year Warranty / 3 Year Warranty on Battery | |
| Compliance: | Fully Compliant to AS/NZS2293.3 | |

| Item No. | Variants | | CCT | Non-Dim | ON/OFF Sensor | DIM Sensor | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | EM | Standard | | | | | Warm White 3000K | Neutral White 4000K | White 5000K |
| HYDRO-60-EM | 66020 | 66012 | TRIO | ● | - | - | 950lm /1850lm | 980lm /1900lm | 950lm /1850lm |
| | 66030 | 66028 | | - | ● | - | | | |
| | 66031 | 66029 | | - | - | ● | | | |
| HYDRO-120-EM | 66021 | 66017 | | ● | - | - | 2350lm /4050lm | 2400lm /4250lm | 2400lm /4150lm |
| | 66022 | 66025 | | - | ● | - | | | |
| | 66023 | 66026 | | - | - | ● | | | |

## Bolt Series










## Bolt Series

| | Bolt-60 | Bolt-120 |
|---|---|---|
| Input Voltage: | 240V AC | |
| Wattage: | 10W/12W/15W/17W/20W | 20W/25W/30W/36W/40W |
| Emergency: | Sustained | |
| LED Type | SMD | |
| Battery: | LiFePO4 (Charge time 24hrs) | |
| CRI: | ≥80 | |
| Beam Angle (°) | 120° | |
| Lifespan: | 40,000hrs | |
| Installation: | Surface Mounted or Suspended | |
| Wide Body: | 130mm (BOLT-EM-60-TRIO Only) | |
| Rated Duration: | 120 min | |
| Classification: | C0: D50, C90: D32 | |
| Warranty: | 5 Year Warranty / 3 Year Warranty on Battery | |
| Compliance: | Fully Compliant to AS/NZS2293.3 | |


| Item No. | Variants | | CCT | Non-Dim | ON/OFF Sensor | DIM Sensor | Lumen Output | | |
|---|---|---|---|---|---|---|---|---|---|
| | EM | Standard | | | | | Warm White 3000K | Neutral White 4000K | White 5700K |
| BOLT-60-EM | 66007 | 66000 | TRIO | • | - | - | 900lm /1800lm | 1000lm /2000lm | 1000lm /2000lm |
| BOLT-120-EM | 66006 | 66003 | | • | - | - | 900lm /3600lm | 1000lm /4000lm | 1000lm /4000lm |

## SENSOR Surface Mounted

Max Distance 20M | IP Rating 65 | Replacement Warranty 5yr | AS/NZS2293.3 Compliance | 360° Detection



| | |
|---|---|
| Input Voltage: | 240V AC |
| Power | 0.5W |
| Rated Load | 1000W LED |
| Detection Distance: | 2-20m (<24°C) |
| Installation Height: | 2.2 - 6m |
| Time Delay | Min 10sec ± 3sec / Max 30min ± 2min |
| Lux Adjustable: | Ambient Light <3-2000 |
| Working Temperature | -20°C~ +40°C |
| Size: | 102x102x58mm |
| Relay: | 16A |
| Features: | Manual override to bypass PIR sensor |
| Warranty: | 5 Year Warranty |
| Compliance: | Fully Compliant to AS/NZS2293.3 |

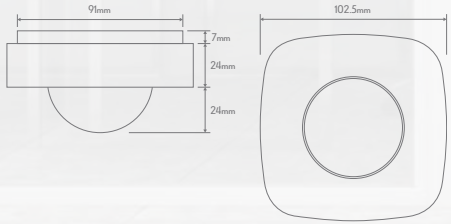


| Item No. | Variants | IP Rating | Range |
|---|---|---|---|
| SENSOR-SM-01 | 66033 | IP65 | 360° |








## SENSOR Recessed Mounted

Max Distance 8M | IP Rating 20 | Replacement Warranty 5yr | AS/NZS2293.3 Compliance | 30° Tilt | Cutout (mm) 70 | 360° Detection




| | |
|---|---|
| Input Voltage: | 240V AC |
| Power | 0.5W |
| Rated Load | 400W LED |
| Detection Distance: | Max 8m (<24°C) |
| Installation Height: | 2.2 - 4m |
| Time Delay | Min 10sec ± 3sec / Max 15min ± 3min |
| Lux Adjustable: | Ambient Light <10-2000 |
| Working Temperature | -20°C~ +40°C |
| Size: | 80x44mm |
| Cutout: | 70mm |
| Features: | 30°C tilt, manual override to bypass PIR sensor |
| Warranty: | 5 Year Warranty |
| Compliance: | Fully Compliant to AS/NZS2293.3 |




| Item No. | Variants | IP Rating | Range |
|---|---|---|---|
| SENSOR-REC-01 | 66036 | IP20 | 360° |

## Clarifications

In this document, "we", "us", and "our" refers to Domus Lighting Pty Ltd.
"The customer" refers to the end user who purchases one of our products through an authorised distributor.
As an Australian supplier, all of our products are covered by the guarantees provided under Australian Consumer Law. Domus Lighting offers a private warranty that is additional to, not in lieu of, the pre-existing legal consumer rights of our customers.

## Warranty Qualification

In order to be eligible for warranty claim:

1. The customer must have been the purchaser of our product and must be able to show their proof of purchase.
2. The product must have been installed by a licensed electrician.
3. The customer must be able to provide evidence of the fault.
4. The product must have been installed in accordance with our installation guidelines.

## Warranty Coverage

Once a warranty claim has been submitted, we will assess the claim and determine the most appropriate resolution. Depending on circumstances, we may elect to send a member of our team to completely replace the faulty product / part or may defer to a third party to complete the replacement. In either case, our liability is limited to the cost of either repairing or replacing the faulty product. In the event that it is found that there is no fault with our product, or that the product is not from Domus Lighting, then a service charge may be incurred to the consumer to cover the cost of the call-out.

If the faulty product is no longer supplied by us, then Domus Lighting is obligated to replace the product with another suitable product from our range or provide a refund for the purchase, as deemed appropriate. Please note that the duration of the warranty runs from the original date of purchase and will not be extended if the original product is replaced.

Our standard warranty period will vary from item to item, and within each item will vary depending on whether the product application is residential or commercial. Please refer to the "Warranty Durations" table on this document to determine your product warranty duration.

We define "residential application" as being installed in a domestic environment such as a house or apartment, with usage not exceeding an average of 8 hours per 24-hour period.

We define "commercial application" as being installed in the address of a registered business or service, and or where the usage of our product exceeds an average of 8 hours per 24-hour period.
Date: 18/05/2023



Warranty Statement

## Exceptions

Our warranty may be voided in the following circumstances:

- If the product has been damaged as a result of non-adherence to our product installation guidelines.
- If the product has been purchased through a non-approved seller.
- If proof of purchase cannot be produced.
- If the product is found to have been improperly stored or used.
- If the product has not been maintained as per any guidelines in the manual.
- If the product has been damaged due to misuse or wear and tear.
- If the product has been damaged due to incorrect voltage, or adverse external conditions such as power dips, lightning, extreme weather, exposure to heat, corrosion, or infestations of insects /vermin.
- If the product has been damaged due to it's combined use with non-authourised products /globes.
- If the product has been repaired by a non-registered electrician.
- If the product is not a Domus Lighting product.
- If the product has not failed to the extent that it no longer performs to its published specifications and features.
- If the product has been installed in a location not appropriate for its given IP rating.
- If the product has corroded or rusted due to being installed within 5km of a saltwater environment.
- If the product has been installed in a location where it cannot be easily serviced, repaired, or replaced without causing further damage to the fitting or its surroundings.
- If the product has been in any way modified or tampered with to the extent that it differs from the original product.

## Disclaimers

Domus Lighting reserves the right to, at its own sole discretion, to amend and or update the terms and conditions of this policy in the future without notice.

## Warranty Durations

| Product Category | Residential Warranty | Commercial Warranty |
|---|---|---|
| Interior | | |
| Downlights (Purchased before 01/05/2023) | 3 Year Replacement | 2 Year Replacement |
| Downlights (Purchased from 01/05/2023) | 5 Year Replacement | 3 Year Replacement |
| LED: Strips, Globes, Oysters, Panels, Pendants, Wall Lights, Step Lights | 3 Year Replacement | 12 Month Replacement |
| LED Battens | 5 Year Replacement | 5 Year Replacement |
| Pendants, Table and Desk Lamps, Floor Lamps, Ceramic Lights, Hollywood Lights | 12 Month Replacement | 12 Month Replacement |
| Exterior | | |
| LED: Wall Lights, Spotlights, Steplights, Security Lights, Floodlights, Garden Lights, Deck Lights, Inground Lights, Bunker Lights | 3 Year Replacement | 12 Month Replacement |
| Bollard Lights, Traditional Exterior Lights, Polycarbonate Wall Lights, Acrylic Spheres | 12 Month Replacement | 12 Month Replacement |
| Power Supplies & Controllers | | |
| LED Power Supplies and Controllers | 3 Year Replacement | 12 Month Replacement |
| IP67 Power Supplies | 5 Year Replacement | 3 Year Replacement |
| Air Movement | | |
| Ceiling Fans, Exhaust Fans, and Bathroom Heaters | 6 Years Total: (3 Years In-Home, then 3 years Part Replacement) | |
| Emergency Lighting | | |
| Emergency Lighting | 5 Year Replacement, 4 Year Battery Replacement | 4 Year Replacement, 4 Year Battery Replacement |
| D40 Emergency Lights | 2 Year Replacement | |
| COB LED Strips | | |
| COB LED Strips | 3 Year Replacement, Total 5 year replacement when used with our drivers | 12 Month Replacement, Total 2 Year replacement when used with our drivers |

*All other products not listed are covered by a 12 month replacement warranty.*



DOMUS®

29-31 Richland Street, Kingsgrove. NSW 2208.
Ph: (02) 9554 9600 | domuslighting.com.au | enquiries@domuslighting.com.au