

Ceiling Fan Range

Summer 2024-25



DOMUS[®]



The Domus DC Ceiling Fan Series is a group of modern and slimline ceiling fans that offers a simplistic look which will suit most decors. Available in different blade lengths with the choice of no light or colour Switchable light. All our Ceiling Fans come with a 9 speed function remote control, a fan timer and reverse Winter/Summer mode included. Light models are fully dimmable via remote control. Constructed from ABS Polymer, operates quietly and with superior airflow. Super energy efficient DC Motors, drawing only 26W at high speed. Smart fan adaptable with a smart chip accessory, that is compatible with Google Home and Alexa. Other optional accessories include extension rods, DC Bluetooth Wall Controller as well as Ceiling Pitch Accessory kits for raked ceiling installations. Suitable for Indoor and Outdoor Undercover use. Backed by a 6-Year Warranty.

Contents

Strike-48 3 Blade 48" Ceiling Fan with no light / with optional light kit	4
Strike-60 3 Blade 60" Ceiling Fan with no light / with optional light kit	6
Blast-48 3 Blade 48" Ceiling Fan with no light / with optional light kit	8
Blast-52 4 Blade 52" Ceiling Fan with no light / with optional light kit	10
Glide-80 6 Blade 80" Ceiling Fan with no light / optional light kit	12
Axis-48 3 Blade 48" Ceiling Fan with no light / with light	14
Motion-52 4 Blade 52" Ceiling Fan with no light / with light	16
Hover-56 5 Blade 56" Ceiling Fan with no light / with light	18
Fresco-52 4 Blade 52" Ceiling Fan with no light / with light	20
Accessories	22

Strike-48

3 Blade 48" Ceiling Fan with no light / with optional light kit



Item No.	Variants			
	Wht/Wht	Blk/Blk	Blk/Wht	Wht/Oak
STRIKE-48	60130	60131	60132	60133
STRIKE-LIGHT-KIT	Blk		Wht	
	60141		60140	
CFA-DR1	60100		60101	



Specification Features

		AirFlow m³/h	
Input Voltage:		Speed	
Motor:	240V AC	1	3975
Type of motor:	25W	2	5086
Blade Pitch:	DC	3	8646
Blade Length:	13°	4	9768
Construction:	48" - 1220mm	5	10,585
Winter/Summer Function:	ABS Polymer motor, canopy and blades	6	11,202
IP Rating:	Yes	7	12,653
Extension Rod Available:	IPX0	8	13,048
Remote Control:	Yes	9	13,859
Luminaire (LED):	Yes (9 Speed)		
CCT:	18W		
Dimmable:	3000K - 4000K - 6000K		
Luminaire Lifespan (hrs):	Yes		
	10,000hrs		

Optional Light Kit

Luminaire (LED):	18W	Lumen Output:		
CCT:	3000K - 4000K - 6000K (Switchable)	3000K	4000K	6000K
Dimmable:	Yes	1800lm	1900lm	1950lm
Luminaire Lifespan (hrs):	10,000hrs			


Warranty

Fan: 3 Year In-Home + 3 Year Parts Replacement


Receiver and remote: 1 Year In-Home + 1 Year Parts Replacement

Accessories sold separately: Bluetooth Wall Control & Extension Rods

Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.

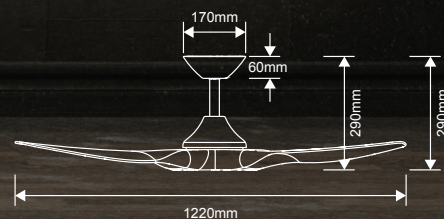

STRIKE-48

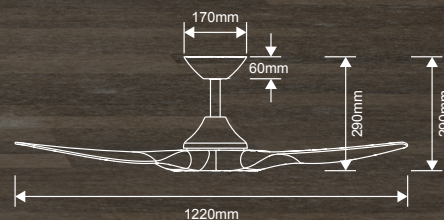

STRIKE-48-LIGHT

Strike-60

3 Blade 60" Ceiling Fan with no light / with optional light kit



Item No.	Variants			
	Wht/Wht	Blk/Blk	Blk/Wht	Wht/Oak
STRIKE-60	60135	60136	60137	60138
STRIKE-LIGHT-KIT	Blk		Wht	
	60141		60140	
CFA-DR1	60100		60101	



Specification Features

Input Voltage:	240V AC
Motor:	35W
Type of motor:	DC
Blade Pitch:	13°
Blade Length:	60" - 1520mm
Construction:	ABS Polymer motor, canopy and blades
Winter/Summer Function:	Yes
IP Rating:	IPX0
Extension Rod Available:	Yes
Remote Control:	Yes (9 Speed)
Luminaire (LED):	18W
CCT:	3000K - 4000K - 6000K
Dimmable:	Yes
Luminaire Lifespan (hrs):	10,000hrs

AirFlow m³/h

Speed	
1	4558
2	5672
3	6113
4	7977
5	9842
6	10,249
7	12,113
8	14,245
9	16,302

Optional Light Kit

Luminaire (LED):	18W	Lumen Output:		
CCT:	3000K - 4000K - 6000K (Switchable)			
Dimmable:	Yes	3000K	4000K	6000K
Luminaire Lifespan (hrs):	10,000hrs	1800lm	1900lm	1950lm


Warranty

Fan: 3 Year In-Home + 3 Year Parts Replacement


Receiver and remote: 1 Year In-Home + 1 Year Parts Replacement

Accessories sold separately: Bluetooth Wall Control & Extension Rods

Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.

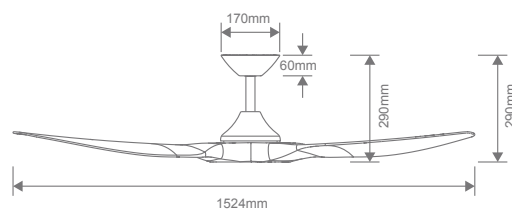

STRIKE-60

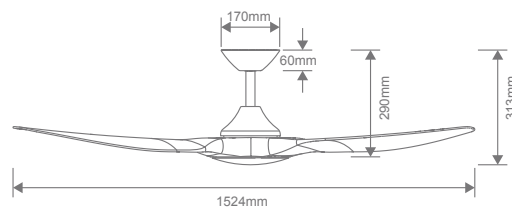

STRIKE-60-LIGHT

Blast-48

3 Blade 48" Ceiling Fan with no light / with optional light kit




Item No.	Variants	
	Blk	Wht
BLAST-48	60146	60145
BLAST-LIGHT-KIT	60152	60151
CFA-DR1	60100	60101




Specification Features		AirFlow m³/h	
Input Voltage:	240V AC	Speed	
Motor:	25W	1	3883
Type of motor:	DC	2	5087
Blade Pitch:	14.5°	3	8646
Blade Length:	48" - 1220mm	4	9768
Construction:	ABS Polymer motor, canopy and blades	5	10,586
Winter/Summer Function:	Yes	6	11,202
IP Rating:	IPX0	7	12,653
Extension Rod Available:	Yes	8	13,048
Remote Control:	Yes (9 Speed)	9	13,850
Luminaire (LED):	18W		
CCT:	3000K - 4000K - 6000K		
Dimmable:	Yes		
Luminaire Lifespan (hrs):	10,000hrs		

Optional Light Kit				
Luminaire (LED):	18W	Lumen Output:		
CCT:	3000K - 4000K - 6000K (Switchable)	3000K	4000K	6000K
Dimmable:	Yes	1800lm	1900lm	1950lm
Luminaire Lifespan (hrs):	10,000hrs			
Warranty				
Fan:	3 Year In-Home + 3 Year Parts Replacement			
Receiver and remote:	1 Year In-Home + 1 Year Parts Replacement			
Accessories sold separately: Bluetooth Wall Control & Extension Rods				
Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.				

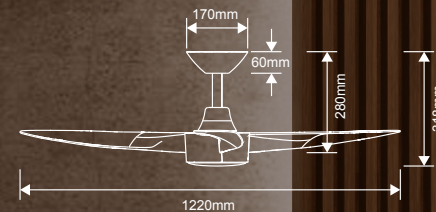

BLAST-48

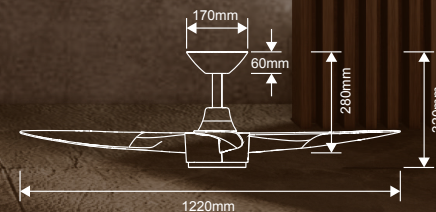

BLAST-48-LIGHT

Blast-52

4 Blade 52" Ceiling Fan with no light / with optional light kit



Item No.	Variants	
	Blk	Wht
BLAST-52	60149	60148
BLAST-LIGHT-KIT	60152	60151
CFA-DR1	60100	60101



Specification Features

Input Voltage:	240V AC
Motor:	25W
Type of motor:	DC
Blade Pitch:	14.5°
Blade Length:	52" - 1320mm
Construction:	ABS Polymer motor, canopy and blades
Winter/Summer Function:	Yes
IP Rating:	IPX0
Extension Rod Available:	Yes
Remote Control:	Yes (9 Speed)
Luminaire (LED):	18W
CCT:	3000K - 4000K - 6000K
Dimmable:	Yes
Luminaire Lifespan (hrs):	10,000hrs

AirFlow m³/h

Speed	
1	4165
2	4673
3	8963
4	9990
5	10,843
6	11,665
7	12,074
8	13,141
9	14,305

Optional Light Kit

Luminaire (LED):	18W	Lumen Output:		
CCT:	3000K - 4000K - 6000K (Switchable)	3000K	4000K	6000K
Dimmable:	Yes	1800lm	1900lm	1950lm
Luminaire Lifespan (hrs):	10,000hrs			


Warranty

Fan: 3 Year In-Home + 3 Year Parts Replacement


Receiver and remote: 1 Year In-Home + 1 Year Parts Replacement

Accessories sold separately: Bluetooth Wall Control & Extension Rods

Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.

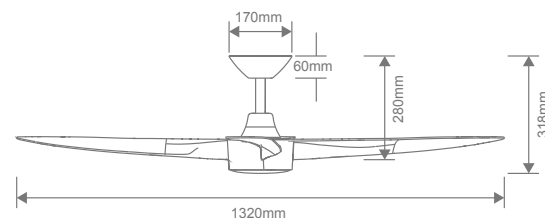

BLAST-52

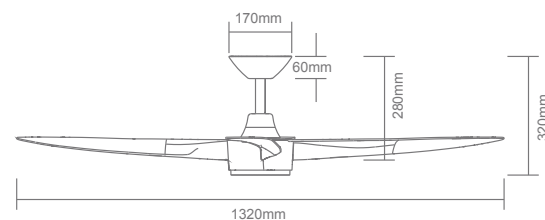

BLAST-52-LIGHT

Glide-80

6 Blade 80" Ceiling Fan with no light / optional light kit



Item No.	Variants	
	Blk	Wht
GLIDE-80	60157	60156
GLIDE-LIGHT-KIT	60162	60161
CFA-DR1	60100	60101



Specification Features

Input Voltage:	240V AC
Motor:	55W
Type of motor:	DC
Blade Pitch:	13°
Blade Length:	80" - 2030mm
Construction:	ABS Polymer motor, canopy and blades
Winter/Summer Function:	Yes
IP Rating:	IPX0
Extension Rod Available:	Yes
Remote Control:	Yes (9 Speed)
Luminaire (LED):	18W
CCT:	3000K - 4000K - 6000K
Dimmable:	Yes
Luminaire Lifespan (hrs):	10,000hrs

AirFlow m³/h

Speed	
1	11058
2	13267
3	14417
4	15696
5	16529
6	17438
7	17615
8	18254
9	22318

Optional Light Kit

Luminaire (LED):	18W	Lumen Output:		
CCT:	3000K - 4000K - 6000K (Switchable)	3000K	4000K	6000K
Dimmable:	Yes	1800lm	1900lm	1950lm
Luminaire Lifespan (hrs):	10,000hrs			


Warranty

Fan: 3 Year In-Home + 3 Year Parts Replacement


Receiver and remote: 1 Year In-Home + 1 Year Parts Replacement

Accessories sold separately: Bluetooth Wall Control & Extension Rods

Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.

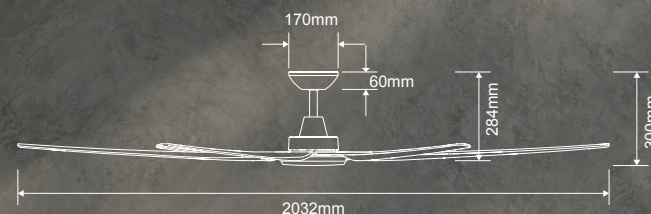

GLIDE-80

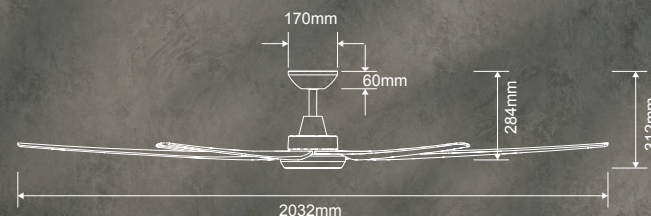

GLIDE-80-LIGHT

Axis-48


3 Blade 48" Ceiling Fan with no light / with light




Item No.	Variants		Wattage	CCT	Lumen Output		
	Blk	Wht			Warm White 3000K	Neutral White 4000K	White 6000K
AXIS-48	60020	60021	26W	TRIO	N/A	N/A	N/A
AXIS-48-LIGHT	60030	60031			1800lm	1900lm	1950lm
CFA-DR1	60100	60101	N/A	N/A	N/A	N/A	N/A

Specification Features		AirFlow m³/h	
Input Voltage:	240V AC	Speed	
Motor:	26W	1	3873
Type of motor:	DC	2	5080
Blade Pitch:	14.5°	3	8642
Blade Length:	48" - 1220mm	4	9765
Construction:	ABS Polymer motor, canopy and blades	5	10,580
Winter/Summer Function:	Yes	6	11,202
IP Rating:	IPX0	7	12,643
Extension Rod Available:	Yes	8	13,028
Remote Control:	Yes	9	13,658
Luminaire (LED):	18W		
CCT:	3000K - 4000K - 6000K (Switchable)		
Dimmable:	Yes		
Luminaire Lifespan (hrs):	10,000hrs		

Warranty	
Fan:	3 Year In-Home + 3 Year Parts Replacement
Receiver and remote:	1 Year In-Home + 1 Year Parts Replacement
Accessories sold separately: Bluetooth Wall Control & Extension Rods	
Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.	

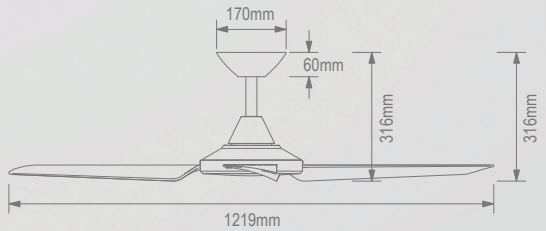


AXIS-48

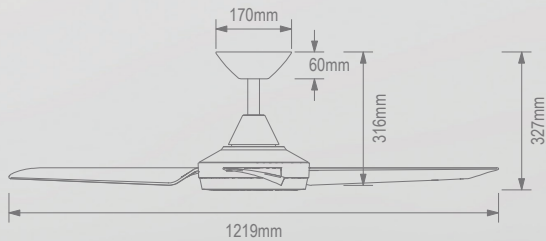

AXIS-48-LIGHT

Motion-52

4 Blade 52" Ceiling Fan with no light / with light

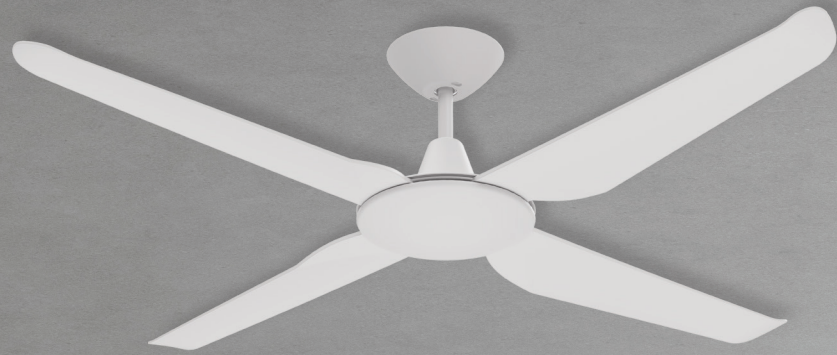

Item No.	Variants		Wattage	CCT	Lumen Output		
	Blk	Wht			Warm White 3000K	Neutral White 4000K	White 6000K
MOTION-52	60040	60041	26W	TRIO	N/A	N/A	N/A
MOTION-52-LIGHT	60050	60051			1800lm	1900lm	1950lm
CFA-DR1	60100	60101	N/A	N/A	N/A	N/A	N/A

Specification Features

Input Voltage:	240V AC
Motor:	26W
Type of motor:	DC
Blade Pitch:	12°
Blade Length:	52" - 1320mm
Construction:	ABS Polymer motor, canopy and blades
Winter/Summer Function:	Yes
IP Rating:	IPX0
Extension Rod Available:	Yes
Remote Control:	Yes
Luminaire (LED):	18W
CCT:	3000K - 4000K - 6000K (Switchable)
Dimmable:	Yes
Luminaire Lifespan (hrs):	10,000hrs

AirFlow m³/h

Speed	
1	4155
2	4653
3	8950
4	9908
5	10,833
6	11,645
7	12,064
8	13,134
9	14,310


Warranty

Fan:	3 Year In-Home + 3 Year Parts Replacement
Receiver and remote:	1 Year In-Home + 1 Year Parts Replacement


Accessories sold separately: Bluetooth Wall Control & Extension Rods

Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.

MOTION-52

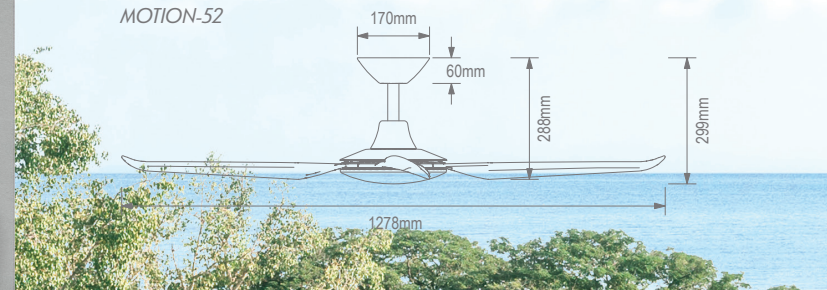

MOTION-52-LIGHT

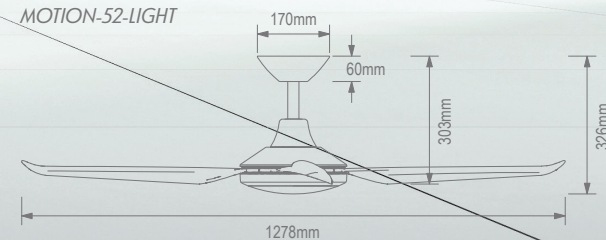

Hover-56

5 Blade 56" Ceiling Fan with no light / with light



Item No.	Variants		Wattage	CCT	Lumen Output		
	Blk	Wht			Warm White 3000K	Neutral White 4000K	White 6000K
HOVER-56	60060	60061	26W	TRIO	N/A	N/A	N/A
HOVER-56-LIGHT	60070	60071			1800lm	1900lm	1950lm
CFA-DR1	60100	60101	N/A	N/A	N/A	N/A	N/A

Specification Features

Input Voltage:	240V AC
Motor:	26W
Type of motor:	DC
Blade Pitch:	14.5°
Blade Length:	56" - 1420mm
Construction:	ABS Polymer motor, canopy and blades
Winter/Summer Function:	Yes
IP Rating:	IPX0
Extension Rod Available:	Yes
Remote Control:	Yes
Luminaire (LED):	18W
CCT:	3000K - 4000K - 6000K (Switchable)
Dimmable:	Yes
Luminaire Lifespan (hrs):	10,000hrs

AirFlow m³/h

Speed	
1	5489
2	6866
3	9628
4	10,595
5	11,342
6	11,915
7	12,571
8	13,952
9	14,968

Warranty


Fan: 3 Year In-Home + 3 Year Parts Replacement

Receiver and remote: 1 Year In-Home + 1 Year Parts Replacement


Accessories sold separately: Bluetooth Wall Control & Extension Rods

Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy.

HOVER-56

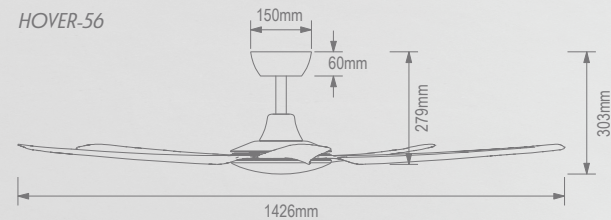

HOVER-56-LIGHT

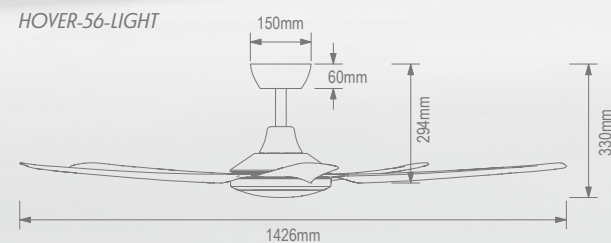

Fresco-52

4 Blade 52" Ceiling Fan with no light / with light



Specification Features

Input Voltage:	240V AC
Motor:	26W
Type of motor:	DC
Blade Pitch:	14.5°
Blade Length:	52" - 1320mm
Construction:	ABS Polymer motor, canopy and blades
Winter/Summer Function:	Yes
IP Rating:	IP66*
Extension Rod Available:	Yes
Remote Control:	Yes
Luminaire (LED):	18W
CCT:	3000K - 4000K - 6000K (Switchable)
Dimmable:	Yes
Luminaire Lifespan (hrs):	10,000hrs

AirFlow m³/h

Speed	AirFlow m³/h
1	4,218
2	5,013
3	8,424
4	10,349
5	11,182
6	12,529
7	12,802
8	13,614
9	15,128

Warranty


Fan:	3 Year In-Home + 3 Year Parts Replacement
Receiver and remote:	1 Year In-Home + 1 Year Parts Replacement

Accessories sold separately: Bluetooth Wall Control & Extension Rods


Note: Do NOT install on a raked or sloped ceiling without the use of the optional 38° Ceiling Kit, as this will damage the receiver housed in the canopy. *If 38° ceiling kit is used the fan will no longer be IP66.



Item No.	Variants		Wattage	CCT	Lumen Output		
	Blk	Wht			Warm White 3000K	Neutral White 4000K	White 6000K
FRESCO-52	60080	60081	26W	TRIO	N/A	N/A	N/A
FRESCO-52-LIGHT	60090	60091			1800lm	1900lm	1950lm
CFA-DR2	60105	60106	N/A	N/A	N/A	N/A	N/A

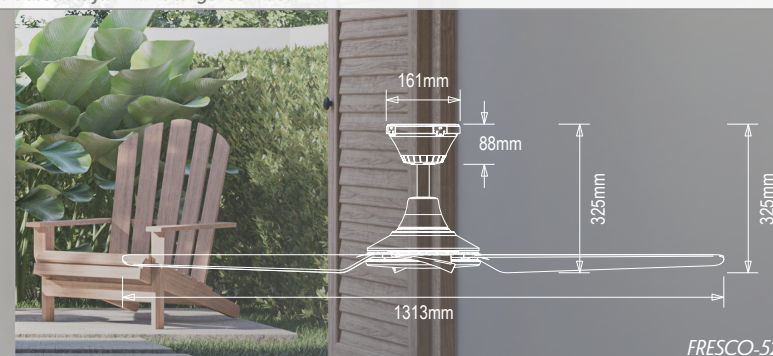

FRESCO-52

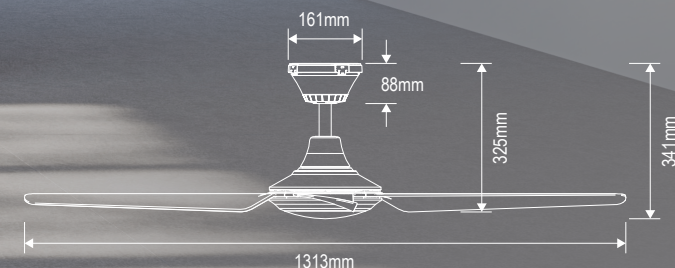

FRESCO-52-LIGHT

Accessories

Downrod 1



Item No.	Variants	
	Blk	Wht
CFA-DR1	60100	60101

Rod length: 900mm

Downrod 2 (To suit FRESCO ceiling fans only)




Item No.	Variants	
	Blk	Wht
CFA-DR2*	60105	60106

*To suit Fresco Ceiling fans only. Rod length: 900mm

Universal 38 Degree Ceiling Mount Kit (Only for raked ceilings)



Item No.	Variants	
	Blk	Wht
CFA-CK1	60115	60114



Only for raked ceiling


Smart WIFI Module



WIFI Module smart chip accessory to adapt Ceiling Fan to become a Smart Fan. Compatible with Google Home and Alexa, using the TUYA Smart App.



Wall Controller



- Compatible with all Domus DC Ceiling fans.
- 9 speed options.
- Timer function for fan and light (1,2,3,8 hours).
- Reverse function
- Light On/Off Settings
- Light Dimming
- Colour Changing Technology function (CCT).
- Displays ambient room temperature in Celsius.
- White and Blue LED back light.

Item No.	Variants	
	Blk	Wht
CFA-CK1	60115	60114
CFA-SWM	60124	N/A
CFA-WC1	N/A	60110

