DOMUS®

Date: June 18, 2026 10:16 am

Veyra Round EM

Emergency LED Bunker Light

Description

VEYRA Series Exterior Wall and Ceiling Bunker Light brings flexibility and durability together in a single outdoor lighting solution. Designed for both wall and ceiling installation, it adapts easily to residential, commercial, and strata applications where reliable performance matters.
A built-in wattage selection switch allows you to choose between low, medium, or high light output, while the tricolour function lets you select Warm White, Neutral White, or White light to suit the space. Whether you're lighting an entryway, pathway, stairwell, or shared outdoor area, VEYRA makes it easy to achieve the right look and brightness without changing fittings. For added versatility, both plain and eyelid fascia covers are included, allowing you to customise the appearance during installation. The Class II design supports installations where an earth connection is not required, helping simplify a range of projects.
Constructed from tough polycarbonate and designed to handle demanding outdoor environments, VEYRA is well suited to coastal locations and high-traffic areas. Available in black or white, with a range of standard, sensor, and emergency sensor configurations, it offers a practical solution for a wide variety of applications. Strong, adaptable, and built for long-term outdoor use, VEYRA delivers dependable illumination wherever it is needed.

Specification Features

Input Voltage:	240V		
Power (W):	9/12/16W (Switchable)		
IP rating (IP):	IP65		
Lumens (lm):	**9W**	**12W**	**16W**
Warm White 3000K	1080lm	1440lm	1920lm
Neutral White 4000K	1125lm	1560lm	2080lm
White 5700K	1125lm	1500lm	2000lm
LED type:	SMD		
CCT:	3000K - 4000K - 5700K (Switchable)		
CRI:	≥80		
Beam angle (°):	120°		
Dimmable:	Yes*		
Average Lifespan (hrs):	50,000hrs		

**Fully dimmable with suitable dimmers.*

Note: For dimming specifications, please refer to the installation manual.




Battery Pack

Input power:	3.5W
Discharge power:	2W(CW)
Rated Input Voltage:	AC23 0V
Frequency:	50/60Hz
Input Voltage:	240V
Output Voltage Range:	DC5-300V
Rated Input Current:	≤0.05 A
Battery Duration:	>3hrs
Charge Period:	≤24hrs

Item No.	Variant		CCT
	Blk	*Wht*	
VEYRA-RND-EM	11319	11320	TRIO

Plain and Eyelid cover included in the box.

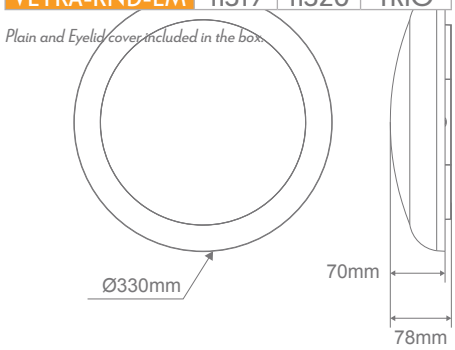

Domus 29-31 Richland Street. Kingsgrove NSW 2208 | Phone: 1300 236 687 | email: orders@domuslighting.com.au
Specification subject to change without prior notice.